



Makroblend® DP7645

(PC+PET)

Covestro Deutschland AG

- (PC PET) blend, impact modified, Injection molding grade, unreinforced, applications: automotive radiator grills

Rheological properties	Value	Unit	Test Standard
ISO Data			
Melt volume-flow rate, MVR	12	cm ³ /10min	ISO 1133
Temperature	260	°C	-
Load	5	kg	-

Mechanical Properties	Value	Unit	Test Standard
ISO Data			
Tensile Modulus	2100	MPa	ISO 527
Yield stress	50	MPa	ISO 527
Yield strain	4.5	%	ISO 527
Nominal strain at break	>50	%	ISO 527
Impact Strength (Charpy), +23°C	no break	kJ/m ²	ISO 179/1eU
Impact Strength (Charpy), -30°C	no break	kJ/m ²	ISO 179/1eU
Notched Impact Strength (Charpy), +23°C	55	kJ/m ²	ISO 179/1eA

Thermal Properties	Value	Unit	Test Standard
ISO Data			
Temp. of deflection under load (1.80 MPa)	94	°C	ISO 75-1/-2
Coeff. of Linear Therm. Expansion, parallel	80	E-6/K	ISO 11359-1/-2
Coeff. of Linear Therm. Expansion, normal	80	E-6/K	ISO 11359-1/-2
Burning Behav. at 1.5 mm Nom. Thickn.	HB	class	UL 94
Thickness tested	1.6	mm	-
Burning Behav. at thickness h	HB	class	UL 94
Thickness tested	0.8	mm	-
Oxygen index	20	%	ISO 4589-1/-2

Electrical Properties	Value	Unit	Test Standard
ISO Data			
Relative permittivity, 100Hz	3.2	-	IEC 62631-2-1
Relative permittivity, 1MHz	3.3	-	IEC 62631-2-1
Dissipation Factor, 100Hz	13	E-4	IEC 62631-2-1
Dissipation Factor, 1MHz	144	E-4	IEC 62631-2-1
Volume Resistivity	>1E13	Ohm*m	IEC 62631-3-1
Surface Resistivity	>1E15	Ohm	IEC 62631-3-2
Electric Strength	33	kV/mm	IEC 60243-1
Comparative tracking index	175	-	IEC 60112

Other Properties	Value	Unit	Test Standard
ISO Data			
Water Absorption	0.75	%	Sim. to ISO 62
Humidity absorption	0.15	%	Sim. to ISO 62
Density	1200	kg/m ³	ISO 1183

Test specimen production	Value	Unit	Test Standard
ISO Data			
Injection Molding, melt temperature	270	°C	ISO 294
Injection Molding, mold temperature	70	°C	ISO 294
Injection Molding, injection velocity	200	mm/s	ISO 294


Processing Recommendation Injection Molding	Value	Unit	Test Standard
Pre-drying - Temperature	110	°C	-
Pre-drying - Time	2 - 4	h	-
Processing humidity	≤0.01	%	-
Melt temperature	260 - 280	°C	-
Mold temperature	60 - 80	°C	-

Makroblend® DP7645 (PC+PET)


Covestro Deutschland AG

Diagrams

Stress-strain

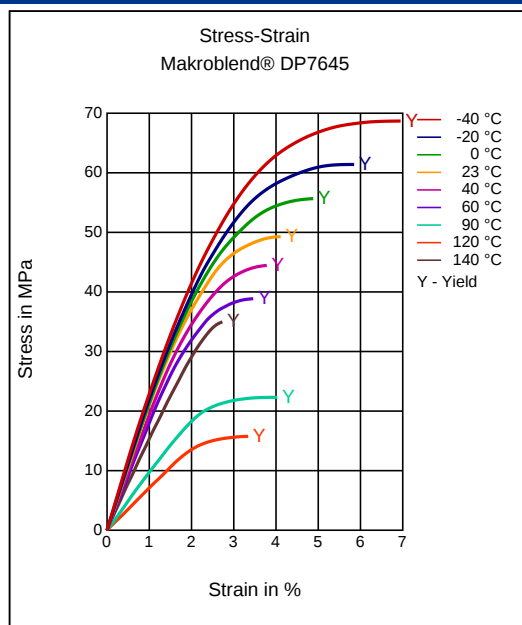

Secant modulus-strain

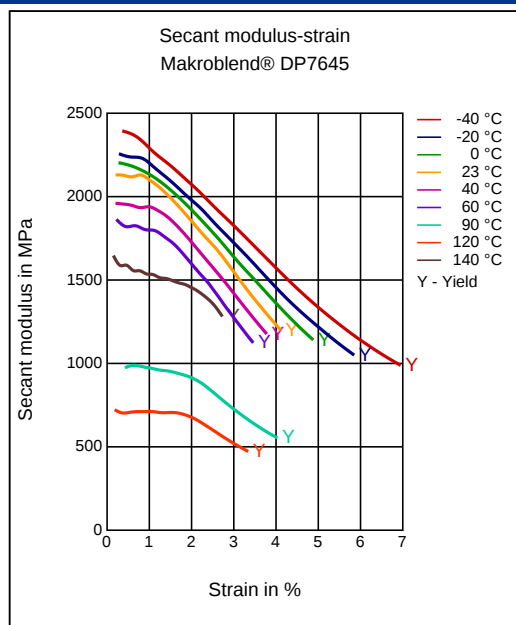

Characteristics

Processing

Injection Molding

Delivery form

Pellets

Additives

Release agent

Special Characteristics

Impact modified

Injection Molding

PREPROCESSING

Max. Water content: 0.01 %

Drying temperature: 110 °C

Drying time:

Circulating air drying oven (50 % fresh air) 4-12 h

Fresh air dryer (high speed dryer) 2-4 h

Dry air dryer 2-4 h

PROCESSING

Melt temperature: 260-280 °C

Mold temperature: 60-80 °C

Use open nozzle.