

Pocan® C5210 000000
(PET+PA46)-I-MX15

Envalior

Injection Molding, 15% Mineral Reinforced, Improved Impact, Excellent Surface Properties, Low Warpage

ISO 1043 (PET+PC)-I-MX15

Rheological properties	Value	Unit	Test Standard
ISO Data			
Melt volume-flow rate, MVR	20	cm ³ /10min	ISO 1133
Temperature	270	°C	-
Load	5	kg	-
Molding shrinkage, parallel	0.6	%	ISO 294-4, 2577
Molding shrinkage, normal	0.6	%	ISO 294-4, 2577

Mechanical Properties	Value	Unit	Test Standard
ISO Data			
Tensile Modulus	3500	MPa	ISO 527
Stress at Break	45	MPa	ISO 527
Strain at Break	15	%	ISO 527
Impact Strength (Charpy), +23°C	no break	kJ/m ²	ISO 179/1eU
Impact Strength (Charpy), -30°C	no break	kJ/m ²	ISO 179/1eU
Notched Impact Strength (Charpy), +23°C	12	kJ/m ²	ISO 179/1eA
Notched Impact Strength (Charpy), -30°C	7	kJ/m ²	ISO 179/1eA
Puncture energy, +23°C	35	J	ISO 6603-2

Thermal Properties	Value	Unit	Test Standard
ISO Data			
Melting Temperature (10°C/min)	250	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	105	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	125	°C	ISO 75-1/-2
Coeff. of Linear Therm. Expansion, parallel	50	E-6/K	ISO 11359-1/-2
Coeff. of Linear Therm. Expansion, normal	80	E-6/K	ISO 11359-1/-2
Burning Behav. at 1.5 mm Nom. Thickn.	HB	class	UL 94
Thickness tested	1.5	mm	-

Electrical Properties	Value	Unit	Test Standard
ISO Data			
Comparative tracking index	225	-	IEC 60112

Other Properties	Value	Unit	Test Standard
ISO Data			
Density	1300	kg/m ³	ISO 1183

Test specimen production	Value	Unit	Test Standard
ISO Data			
Injection Molding, melt temperature	270	°C	ISO 294
Injection Molding, mold temperature	80	°C	ISO 294

Processing Recommendation Injection Molding	Value	Unit	Test Standard
Pre-drying - Temperature	120	°C	-
Pre-drying - Time	4 - 8	h	-
Processing humidity	≤0.02	%	-
Melt temperature	260 - 280	°C	-
Mold temperature	70 - 90	°C	-


Pocan® C5210 000000

(PET+PA46)-I-MX15


Envalior

Diagrams

Stress-strain

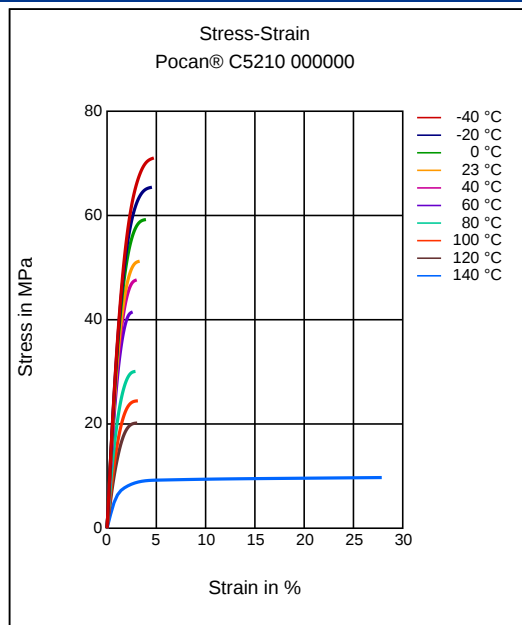

Secant modulus-strain

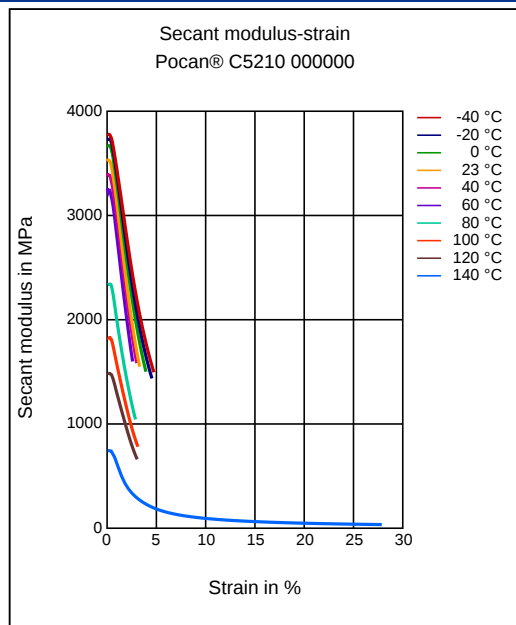

Characteristics

Processing

Injection Molding

Delivery form

Pellets

Special Characteristics

Impact modified, Heat aging stabilized

Features

Low Warpage

Injection Molding

PREPROCESSING

Residual moisture content: 0.00 - 0.02 %

Drying temperature circulating air dryer: 120 °C

Drying time circulating air dryer: 4 - 8 h

PROCESSING

Melt temperature (Tmin - Tmax): 260 - 280 °C

admissible residence time at Tmax: <10 min

Mold temperature: 70 - 90 °C