

Luran® ECO 358N BC70

SAN

INEOS Styrolution

Luran® ECO 358N BC70 is the general purpose easy-flow grade of SAN, suitable for moldings with very thin walls and / or adverse flow length to wall ratio. It features very good transparency and a light intrinsic color. Luran® ECO 358N BC70 is an ISCC compliant product leading to a substitution of fossil source styrene with ISCC certified bio-attributed styrene.

Rheological properties	Value	Unit	Test Standard
ISO Data			
Melt volume-flow rate, MVR	22	cm³/10min	ISO 1133
Temperature	220	°C	-
Load	10	kg	-

Mechanical Properties	Value	Unit	Test Standard
ISO Data			
Tensile Modulus	3700	MPa	ISO 527
Stress at Break	72	MPa	ISO 527
Strain at Break	3	%	ISO 527
Impact Strength (Charpy), +23°C	16	kJ/m²	ISO 179/1eU
Impact Strength (Charpy), -30°C	16	kJ/m²	ISO 179/1eU
Notched Impact Strength (Charpy), +23°C	2	kJ/m²	ISO 179/1eA
Flexural Modulus (23°C)	3600	MPa	ISO 178
Flexural strength	120	MPa	ISO 178
Notched Impact Strength (Izod), 23°C	2	kJ/m²	ISO 180/1A
Ball Indentation Hardness	165	MPa	ISO 2039-1

Thermal Properties	Value	Unit	Test Standard
ISO Data			
Temp. of deflection under load (1.80 MPa)	86	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	99	°C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 50N	106	°C	ISO 306
Coeff. of Linear Therm. Expansion, parallel	70	E-6/K	ISO 11359-1/-2
ASTM Data			
Thermal Conductivity, solid state	0.17	W/(m K)	DIN 52612-1

Other Properties	Value	Unit	Test Standard
ISO Data			
Humidity absorption	0.2	%	Sim. to ISO 62
Density	1080	kg/m³	ISO 1183
Bulk density	600	kg/m³	-

Rheological calculation properties	Value	Unit	Test Standard
ISO Data			
Thermal Conductivity of Melt	0.17	W/(m K)	-

Optical Properties	Value	Unit	Test Standard
ASTM Data			
Index of Refraction	1.57	-	ISO 489

Processing Recommendation Injection Molding	Value	Unit	Test Standard
Pre-drying - Temperature	80	°C	-
Pre-drying - Time	2 - 4	h	-
Melt temperature	220 - 260	°C	-
Mold temperature	40 - 80	°C	-
Injection speed	200	mm/s	-


Luran® ECO 358N BC70

SAN


INEOS Styrolution

Diagrams


Viscosity-shear rate

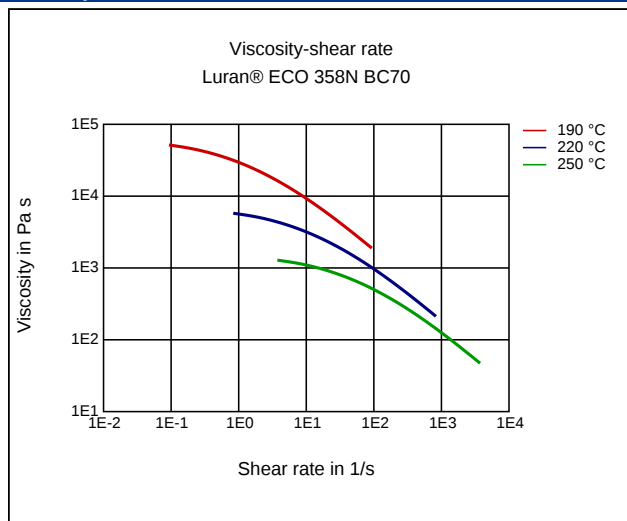


Shearstress-shear rate

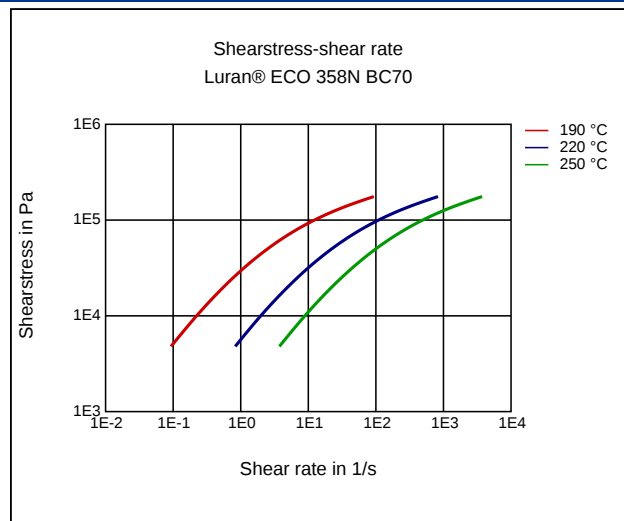

Stress-strain

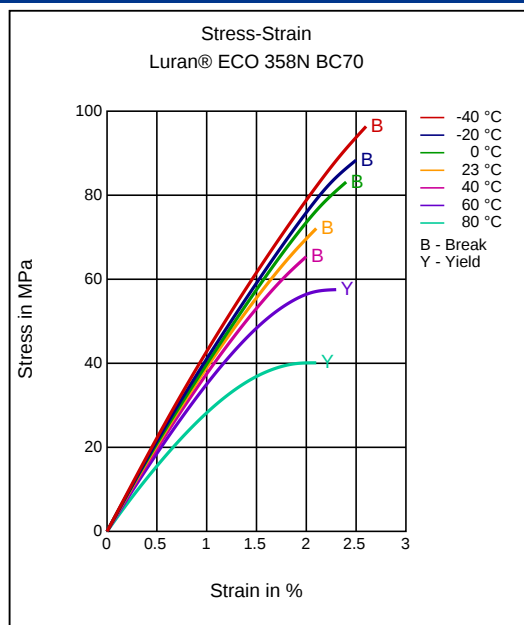


Secant modulus-strain

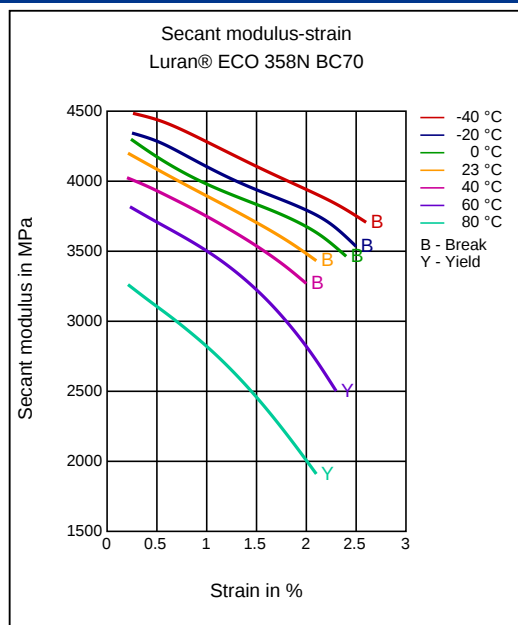


Luran® ECO 358N BC70
SAN

INEOS Styrolution


Stress-strain (isochronous) 23°C

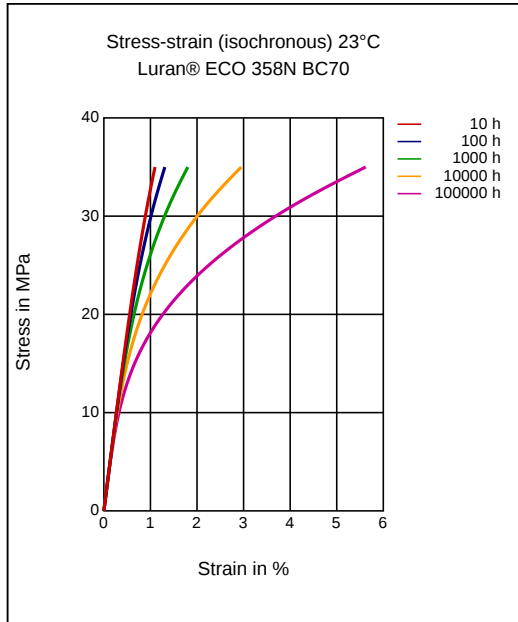


Creep modulus-time 23°C

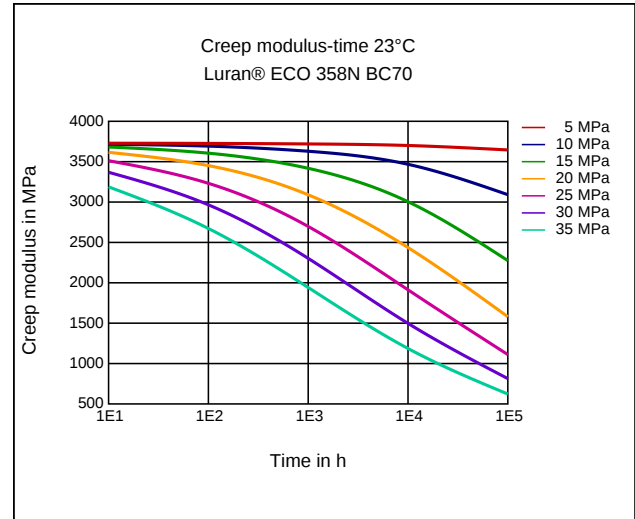

Stress-strain (isochronous) 40°C

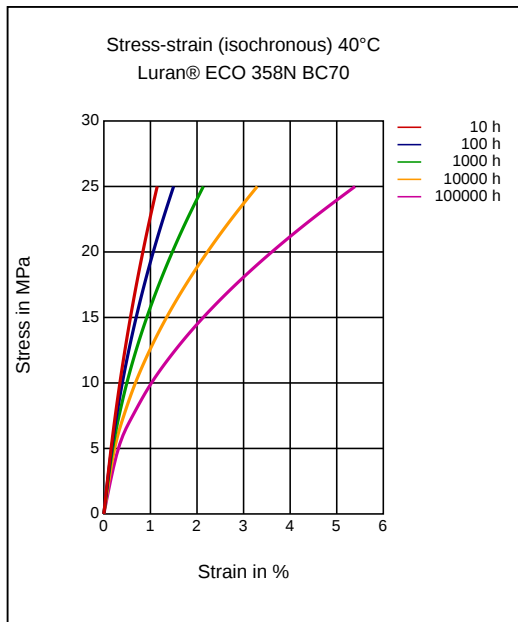


Creep modulus-time 40°C

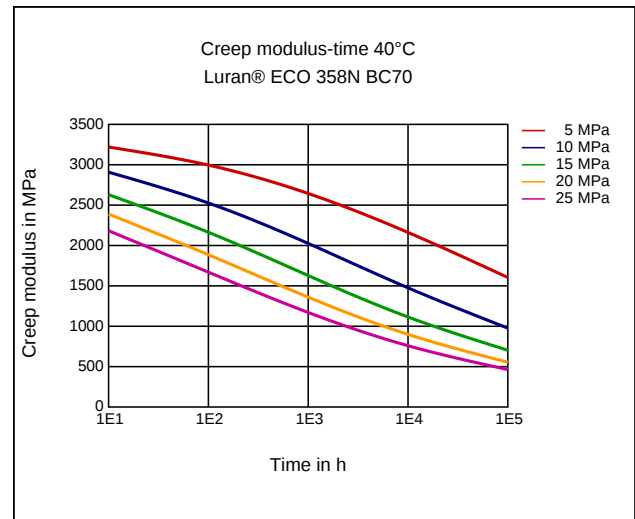


Luran® ECO 358N BC70
SAN

INEOS Styrolution


Stress-strain (isochronous) 60°C

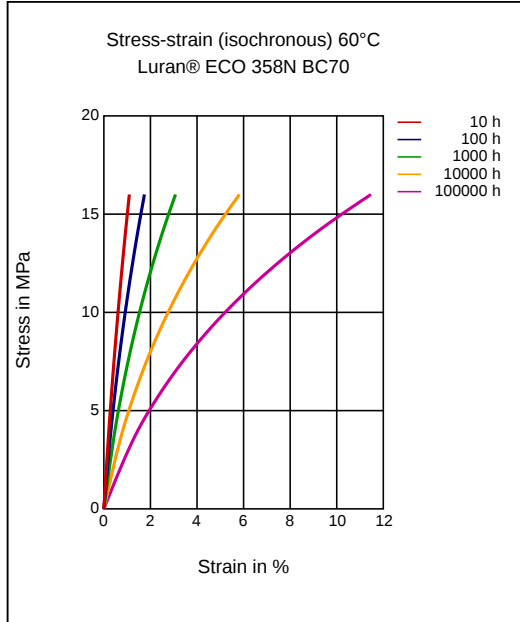


Creep modulus-time 60°C

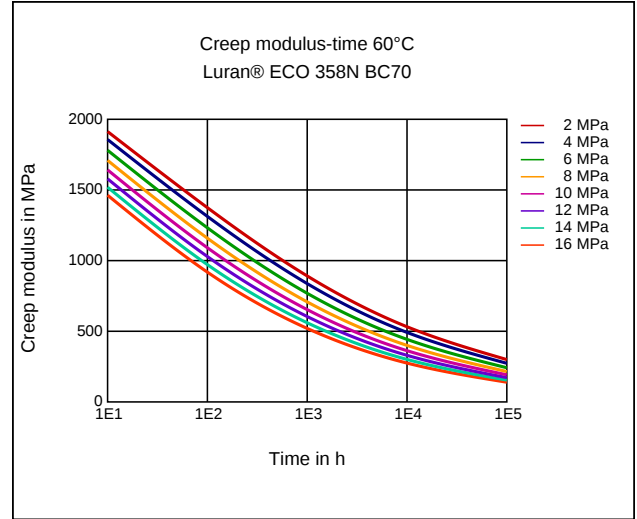

Stress-strain (isochronous) 80°C

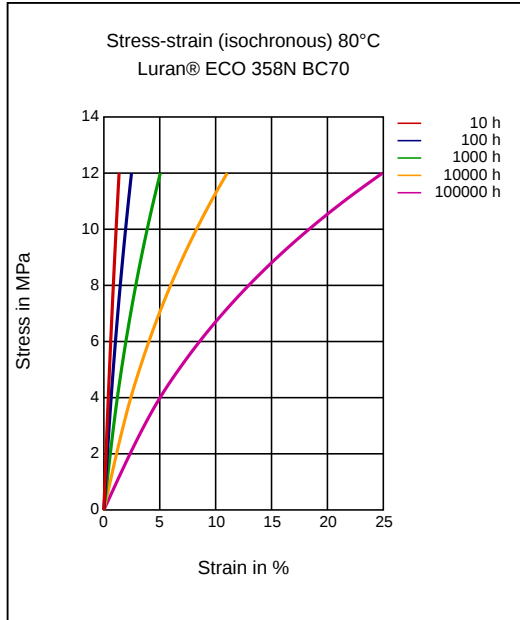

Creep modulus-time 80°C

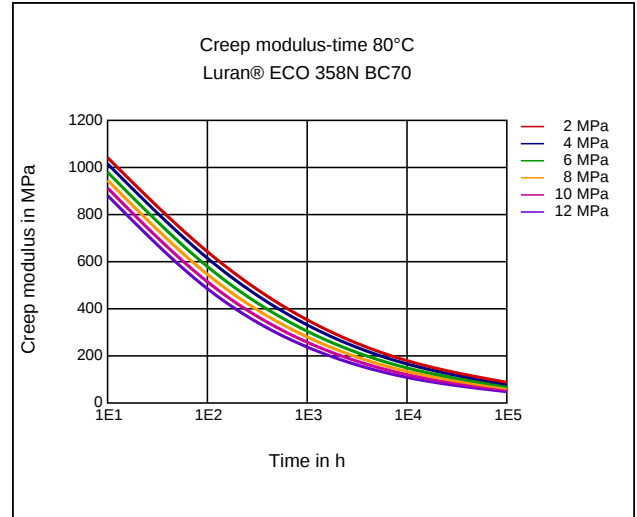


Luran® ECO 358N BC70


SAN

INEOS Styrolution

Specific volume-temperature (pvT)

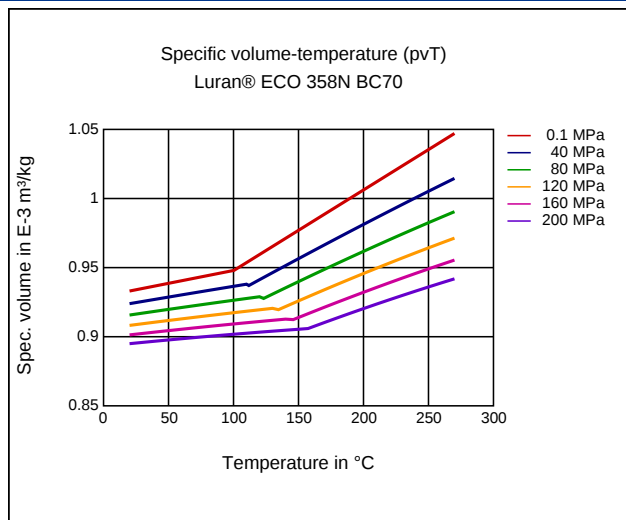

Tensile Modulus-Temperature

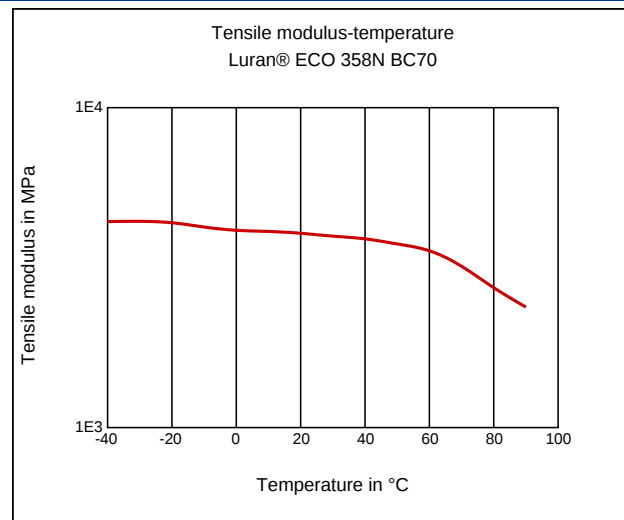

Characteristics

Processing

Injection Molding

Delivery form

Pellets

Special Characteristics

Heat aging stabilized, Transparent

Chemical Resistance

General Chemical Resistance

Certifications

Contains renewable resources, Food approval, ISCC Plus

Applications

General Purpose, Packaging

Injection Molding

PREPROCESSING

Pre-drying, Temperature: 80 °C

Pre-drying, Time: 2 - 4h

PROCESSING

Melt temperature, range: 220 - 260 °C

Mold temperature, range: 40 - 80 °C

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass) (23 °C)
- ✓ Citric Acid solution (10% by mass) (23 °C)
- ✓ Lactic Acid (10% by mass) (23 °C)
- ✓ Hydrochloric Acid (36% by mass) (23 °C)
- ✓ Sulfuric Acid (38% by mass) (23 °C)
- ✓ Sulfuric Acid (5% by mass) (23 °C)
- ✓ Chromic Acid solution (40% by mass) (23 °C)

Bases

- ✓ Sodium Hydroxide solution (35% by mass) (23 °C)
- ✓ Sodium Hydroxide solution (1% by mass) (23 °C)
- ✓ Ammonium Hydroxide solution (10% by mass) (23 °C)

Alcohols

- ✓ Methanol (23 °C)

Luran® ECO 358N BC70

SAN

INEOS Styrolution

- ✓ Ethanol (23°C)

Hydrocarbons

- ✓ iso-Octane (23°C)

Standard Fuels

- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)

Salt solutions

- ✓ Sodium Chloride solution (10% by mass) (23°C)
- ✓ Sodium Hypochlorite solution (10% by mass) (23°C)
- ✓ Sodium Carbonate solution (20% by mass) (23°C)
- ✓ Sodium Carbonate solution (2% by mass) (23°C)
- ✓ Zinc Chloride solution (50% by mass) (23°C)

Other

- ✓ Hydrogen peroxide (23°C)
 - ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water (23°C)
 - ✓ Water (23°C)
-