



Desmopan 795U TPU

Covestro Deutschland AG


- injection molding grade
 - with special UV stabilizers
 - good hydrolysis and microbial resistance
 - short cycle times
- Application:
- Ear-tags

Mechanical Properties	Value	Unit	Test Standard
ISO Data			
Tensile Stress (10% Elongation)	8.1	MPa	ISO 527
Stress at 100% Elongation	14.6	MPa	ISO 527
Stress at 300% Elongation	28	MPa	ISO 527
Stress at Break TPE	48	MPa	ISO 527
Strain at Break TPE	>300	%	ISO 527
Compression Set under constant strain, 70 °C	45	%	ISO 815
Tear strength	100	kN/m	ISO 34-1
Abrasion resistance	25	mm ³	ISO 4649
Shore Hardness A (15s)	94	-	ISO 868
Shore Hardness D (15s)	46	-	ISO 868


Other Properties	Value	Unit	Test Standard
ISO Data			
Density	1200	kg/m ³	ISO 1183

Diagrams

Dynamic Shear modulus-temperature

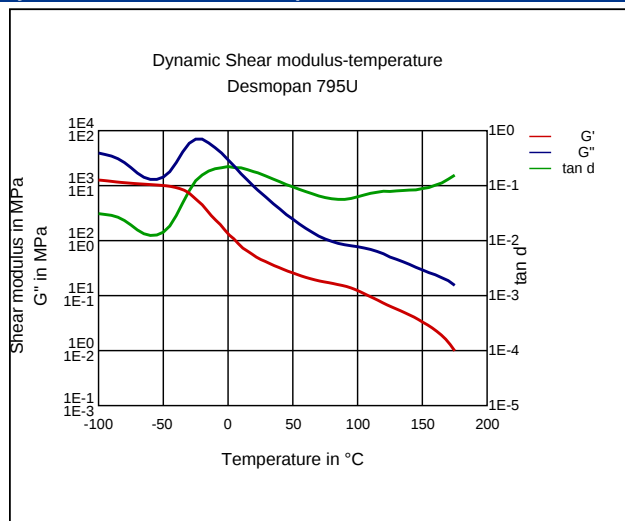

Stress-Strain (TPE)

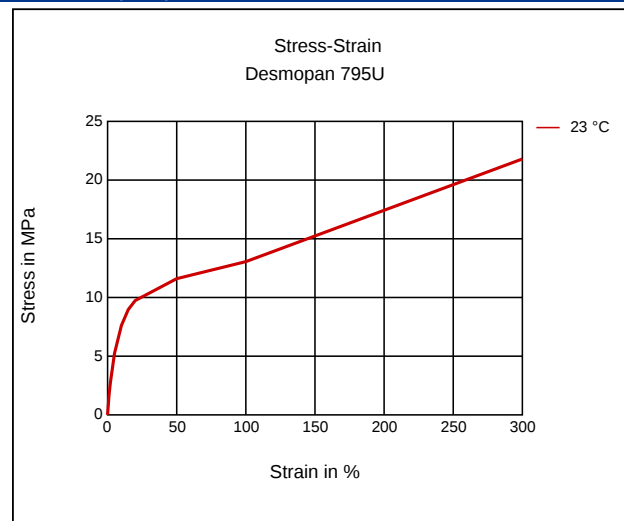

Characteristics

Processing

Injection Molding

Delivery form

Pellets

Additives

Release agent

Injection Molding

PREPROCESSING

Max. water content: 0.05 %

Max. drying temperature: 80 °C

Drying time:

Dry air dryer 1-2 h

Desmopan 795U
TPU

Covestro Deutschland AG

PROCESSING

Melt temperature: 210-230 °C

Mold temperature: 20-40 °C

Other Extrusion

Preprocessing

Max. Water content ≤0.05 %

Drying temperature 70-110 °C

Dry air dryer 1-2 h

Profile extrusion

Preprocessing

Max. Water content ≤0.05 %

Drying temperature 70-110 °C

Dry air dryer 1-2 h