



Desmopan 6080A

TPU

Covestro Deutschland AG

- Injection molding grade
- free from plasticizers
- easy flowing
- very good hydrolysis and microbial resistance
- low abrasion
- Application:
 - automotive interior applications
 - hard - soft systems
 - Shoe soles

Mechanical Properties	Value	Unit	Test Standard
ISO Data			
Tensile Stress (10% Elongation)	1.5	MPa	ISO 527
Stress at 100% Elongation	5.8	MPa	ISO 527
Stress at 300% Elongation	10	MPa	ISO 527
Stress at Break TPE	30	MPa	ISO 527
Strain at Break TPE	>300	%	ISO 527
Compression Set under constant strain, 70 °C	38	%	ISO 815
Tear strength	36	kN/m	ISO 34-1
Abrasion resistance	43	mm ³	ISO 4649
Shore Hardness A (15s)	80	-	ISO 868

Other Properties	Value	Unit	Test Standard
ISO Data			
Density	1110	kg/m ³	ISO 1183

Processing Recommendation Injection Molding	Value	Unit	Test Standard
Pre-drying - Temperature	80	°C	-
Pre-drying - Time	1 - 2	h	-
Processing humidity	≤0.05	%	-
Melt temperature	200 - 220	°C	-
Mold temperature	20 - 40	°C	-


Desmopan 6080A

TPU

Covestro Deutschland AG

Diagrams

Stress-Strain (TPE)

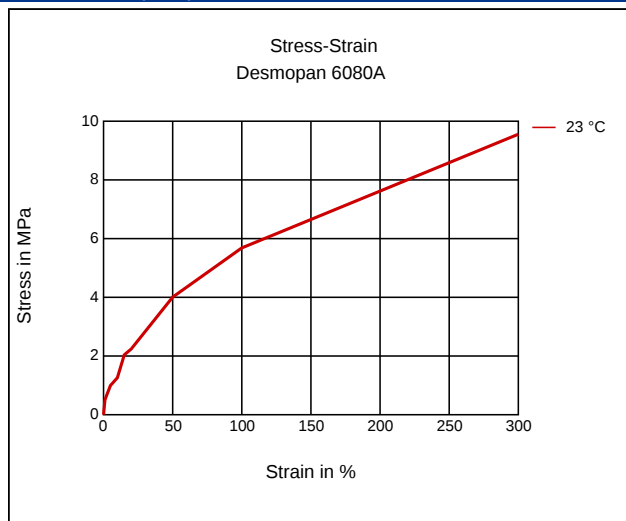

Characteristics

Processing

Injection Molding

Injection Molding

PREPROCESSING

Max. water content: 0.05 %

Max. drying temperature: 80 °C

Drying time:

Dry air dryer 1-2 h

PROCESSING

Melt temperature: 200-220 °C

Mold temperature: 20-40 °C