

**Grilon BG-30**

PA6-GF30

EMS-GRIVORY | a unit of EMS-CHEMIE AG

**Product Texts**

Product designation according to ISO 1874:

PA6, MHR, 14-100N, GF30

Mechanical properties	dry / cond	Unit	Test Standard
Tensile Modulus	<b>10000 / 6500</b>	MPa	ISO 527-1/-2
Stress at break	<b>190 / 110</b>	MPa	ISO 527-1/-2
Strain at break	<b>3.5 / 6.5</b>	%	ISO 527-1/-2
Charpy impact strength (+23°C)	<b>85 / 95</b>	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy impact strength (-30°C)	<b>70 / 70</b>	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy notched impact strength (+23°C)	<b>12 / 20</b>	kJ/m <sup>2</sup>	ISO 179/1eA
Charpy notched impact strength (-30°C)	<b>9 / 9</b>	kJ/m <sup>2</sup>	ISO 179/1eA

Mechanical properties (TPE)	dry / cond	Unit	Test Standard
Ball indentation hardness	<b>210 / 100</b>	MPa	ISO 2039-1

Thermal properties	dry / cond	Unit	Test Standard
Melting temperature (10°C/min)	<b>222 / -</b>	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	<b>200 / -</b>	°C	ISO 75-1/-2
Temp. of deflection under load (8.00 MPa)	<b>135 / -</b>	°C	ISO 75-1/-2
Coeff. of linear therm. expansion (parallel)	<b>30 / -</b>	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion (normal)	<b>110 / -</b>	E-6/K	ISO 11359-1/-2
Burning Behav. at thickness h	<b>HB / -</b>	class	IEC 60695-11-10
Thickness tested	<b>0.8 / -</b>	mm	IEC 60695-11-10
Max. usage temperature (long term)	<b>90 - 110</b>	°C	ISO 2578
Max. usage temperature (short term)	<b>160</b>	°C	EMS


Electrical properties	dry / cond	Unit	Test Standard
Volume resistivity	<b>1E12 / 1E10</b>	Ohm*m	IEC 60093
Surface resistivity	<b>- / 1E12</b>	Ohm	IEC 60093
Electric strength	<b>34 / 31</b>	kV/mm	IEC 60243-1
Comparative tracking index	<b>- / 550</b>	-	IEC 60112

Other properties	dry / cond	Unit	Test Standard
Water absorption	<b>7 / -</b>	%	Sim. to ISO 62
Humidity absorption	<b>2 / -</b>	%	Sim. to ISO 62
Density	<b>1350 / -</b>	kg/m <sup>3</sup>	ISO 1183


Rheo/Phys properties	dry / cond	Unit	Test Standard
Molding shrinkage (parallel)	<b>0.1 / -</b>	%	ISO 294-4, 2577
Molding shrinkage (normal)	<b>0.6 / -</b>	%	ISO 294-4, 2577

**Diagrams**



Dynamic Shear modulus-temperature

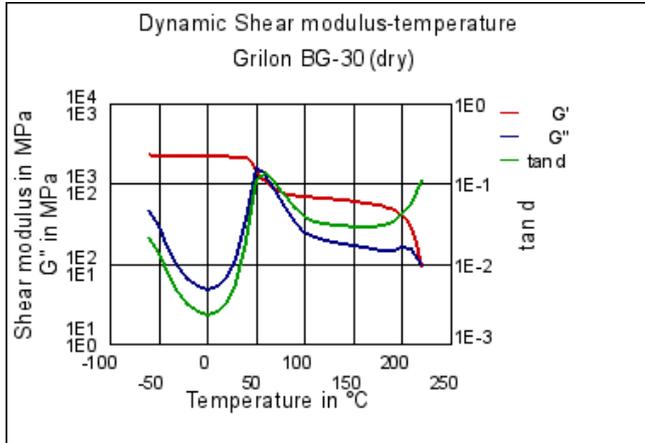

Dynamic Shear modulus-temperature

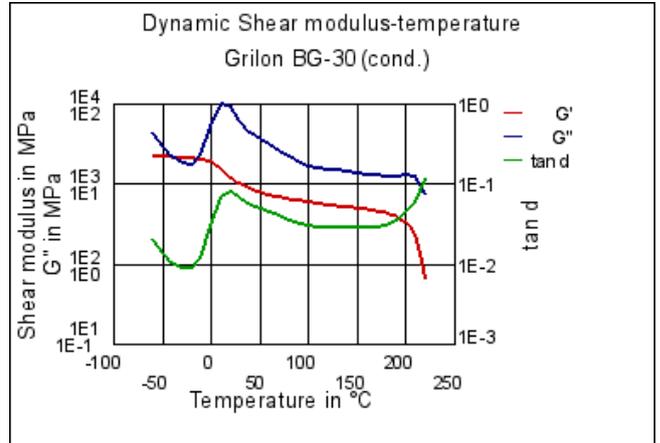

Tensile modulus-temperature

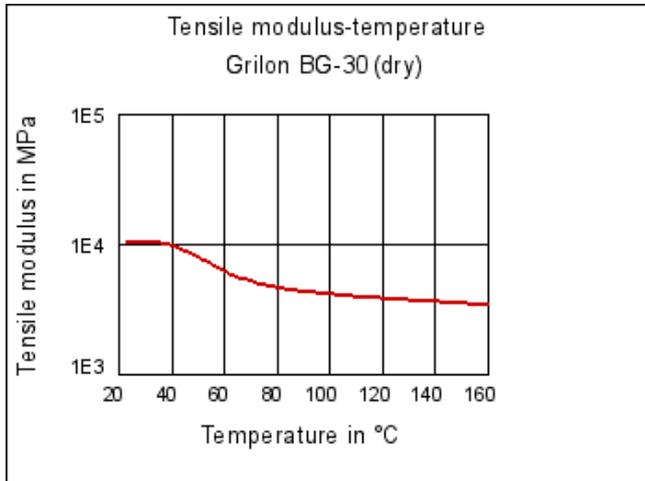

Characteristics

Processing

Injection Molding

Delivery form

Granules

Regional Availability

North America, Europe, Asia Pacific, South and Central America, Near East/Africa

Chemical Media Resistance

Acids

- 😊 Acetic Acid (5% by mass) (23°C)
- 😊 Citric Acid solution (10% by mass) (23°C)
- 😊 Lactic Acid (10% by mass) (23°C)

Automotive

Air intake systems, Interior

Electricals & Electronics

Electrical appliances, Electrical equipment



-  Hydrochloric Acid (36% by mass) (23°C)
-  Nitric Acid (40% by mass) (23°C)
-  Sulfuric Acid (38% by mass) (23°C)
-  Sulfuric Acid (5% by mass) (23°C)
-  Chromic Acid solution (40% by mass) (23°C)

## Bases

-  Sodium Hydroxide solution (35% by mass) (23°C)
-  Sodium Hydroxide solution (1% by mass) (23°C)
-  Ammonium Hydroxide solution (10% by mass) (23°C)

## Alcohols

-  Isopropyl alcohol (23°C)
-  Methanol (23°C)
-  Ethanol (23°C)

## Hydrocarbons

-  n-Hexane (23°C)
-  Toluene (23°C)
-  iso-Octane (23°C)

## Ketones

-  Acetone (23°C)

## Ethers

-  Diethyl ether (23°C)

## Mineral oils

-  SAE 10W40 multigrade motor oil (23°C)
-  SAE 10W40 multigrade motor oil (130°C)
-  SAE 80/90 hypoid-gear oil (130°C)
-  Insulating Oil (23°C)

## Standard Fuels

-  ISO 1817 Liquid 1 (60°C)
-  ISO 1817 Liquid 2 (60°C)
-  ISO 1817 Liquid 3 (60°C)
-  ISO 1817 Liquid 4 (60°C)
-  Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)
-  Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)
-  Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
-  Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
-  Diesel fuel (pref. ISO 1817 Liquid F) (>90°C)

## Salt solutions

-  Sodium Chloride solution (10% by mass) (23°C)
-  Sodium Hypochlorite solution (10% by mass) (23°C)
-  Sodium Carbonate solution (20% by mass) (23°C)
-  Sodium Carbonate solution (2% by mass) (23°C)



☺ Zinc Chloride solution (50% by mass) (23°C)

Other

- ☺ Ethyl Acetate (23°C)
- ☹ Hydrogen peroxide (23°C)
- ☺ DOT No. 4 Brake fluid (130°C)
- ☺ Ethylene Glycol (50% by mass) in water (108°C)
- ☺ 1% nonylphenoxy-polyethyleneoxy ethanol in water (23°C)
- ☺ 50% Oleic acid + 50% Olive Oil (23°C)
- ☺ Water (23°C)
- ☺ Deionized water (90°C)
- ☹ Phenol solution (5% by mass) (23°C)

