

**Grilon BRZ 334 H**

PA6

EMS-GRIVORY | a unit of EMS-CHEMIE AG

**Product Texts**

Product designation according to ISO 1874:

PA6-HI, GHR, 24-010 N

Mechanical properties	dry / cond	Unit	Test Standard
Tensile Modulus	<b>950 / 300</b>	MPa	ISO 527-1/-2
Stress at 50% strain	<b>40 / 20</b>	MPa	ISO 527-1/-2
Strain at break	<b>&gt;50 / &gt;50</b>	%	ISO 527-1/-2
Charpy impact strength (+23°C)	<b>N / N</b>	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy impact strength (-30°C)	<b>N / N</b>	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy notched impact strength (+23°C)	<b>100 / N</b>	kJ/m <sup>2</sup>	ISO 179/1eA
Charpy notched impact strength (-30°C)	<b>85 / 85</b>	kJ/m <sup>2</sup>	ISO 179/1eA

Mechanical properties (TPE)	dry / cond	Unit	Test Standard
Shore D hardness (15s)	<b>63 / 55</b>	-	ISO 868


Thermal properties	dry / cond	Unit	Test Standard
Melting temperature (10°C/min)	<b>222 / -</b>	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	<b>45 / -</b>	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	<b>55 / -</b>	°C	ISO 75-1/-2
Coeff. of linear therm. expansion (parallel)	<b>120 / -</b>	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion (normal)	<b>140 / -</b>	E-6/K	ISO 11359-1/-2
Burning Behav. at thickness h	<b>HB / -</b>	class	IEC 60695-11-10
Thickness tested	<b>0.8 / -</b>	mm	IEC 60695-11-10
Max. usage temperature (long term)	<b>100 - 120</b>	°C	ISO 2578
Max. usage temperature (short term)	<b>180</b>	°C	EMS

Electrical properties	dry / cond	Unit	Test Standard
Volume resistivity	<b>1E11 / 1E8</b>	Ohm*m	IEC 60093
Surface resistivity	<b>- / 1E9</b>	Ohm	IEC 60093
Electric strength	<b>26 / 22</b>	kV/mm	IEC 60243-1
Comparative tracking index	<b>- / 600</b>	-	IEC 60112


Other properties	dry / cond	Unit	Test Standard
Water absorption	<b>5 / -</b>	%	Sim. to ISO 62
Humidity absorption	<b>1.5 / -</b>	%	Sim. to ISO 62
Density	<b>1000 / -</b>	kg/m <sup>3</sup>	ISO 1183

**Diagrams**


Dynamic Shear modulus-temperature

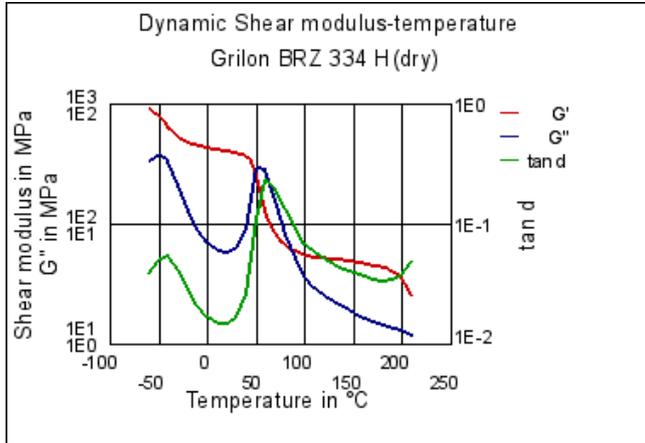

Dynamic Shear modulus-temperature

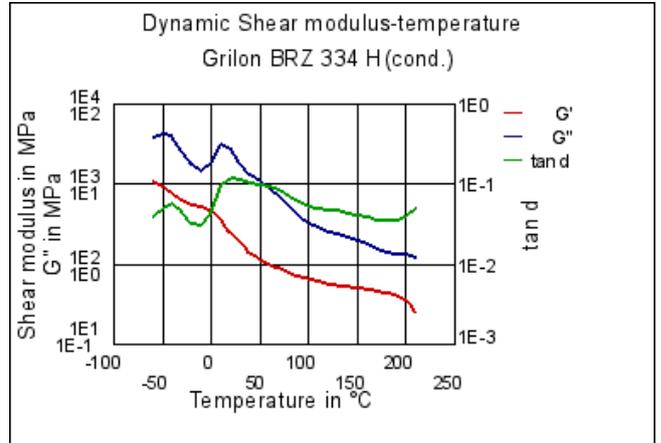

Characteristics

Processing

Other Extrusion

Delivery form

Granules

Special Characteristics

High impact or impact modified

Regional Availability

North America, Europe, Asia Pacific, South and Central America, Near East/Africa

Chemical Media Resistance

Acids

- ☺ Acetic Acid (5% by mass) (23°C)
- ☺ Citric Acid solution (10% by mass) (23°C)
- ☺ Lactic Acid (10% by mass) (23°C)
- ⊖ Hydrochloric Acid (36% by mass) (23°C)
- ⊖ Nitric Acid (40% by mass) (23°C)
- ⊖ Sulfuric Acid (38% by mass) (23°C)
- ⊖ Sulfuric Acid (5% by mass) (23°C)
- ⊖ Chromic Acid solution (40% by mass) (23°C)

Bases

- ☺ Sodium Hydroxide solution (35% by mass) (23°C)
- ☺ Sodium Hydroxide solution (1% by mass) (23°C)
- ☺ Ammonium Hydroxide solution (10% by mass) (23°C)

Alcohols

- ☺ Isopropyl alcohol (23°C)

Product Attributes

Flexible

Automotive

Air intake systems, Cooling and climate control

Electricals & Electronics

Cables & Tubes

Industry & Consumer goods

Hydraulics & Pneumatics, Mechanical Engineering, Power transmission



☺ Methanol (23°C)

☺ Ethanol (23°C)

#### Hydrocarbons

☺ n-Hexane (23°C)

☺ Toluene (23°C)

☺ iso-Octane (23°C)

#### Ketones

☺ Acetone (23°C)

#### Ethers

☺ Diethyl ether (23°C)

#### Mineral oils

☺ SAE 10W40 multigrade motor oil (23°C)

☺ SAE 10W40 multigrade motor oil (130°C)

☺ SAE 80/90 hypoid-gear oil (130°C)

☺ Insulating Oil (23°C)

#### Standard Fuels

☺ ISO 1817 Liquid 1 (60°C)

☺ ISO 1817 Liquid 2 (60°C)

☺ ISO 1817 Liquid 3 (60°C)

☺ ISO 1817 Liquid 4 (60°C)

☺ Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)

☺ Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)

☺ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)

☺ Diesel fuel (pref. ISO 1817 Liquid F) (90°C)

☺ Diesel fuel (pref. ISO 1817 Liquid F) (>90°C)

#### Salt solutions

☺ Sodium Chloride solution (10% by mass) (23°C)

☹ Sodium Hypochlorite solution (10% by mass) (23°C)

☺ Sodium Carbonate solution (20% by mass) (23°C)

☺ Sodium Carbonate solution (2% by mass) (23°C)

☺ Zinc Chloride solution (50% by mass) (23°C)

#### Other

☺ Ethyl Acetate (23°C)

☹ Hydrogen peroxide (23°C)

☺ DOT No. 4 Brake fluid (130°C)

☺ Ethylene Glycol (50% by mass) in water (108°C)

☺ 1% nonylphenoxy-polyethyleneoxy ethanol in water (23°C)

☺ 50% Oleic acid + 50% Olive Oil (23°C)

☺ Water (23°C)

☺ Deionized water (90°C)

☹ Phenol solution (5% by mass) (23°C)

