

RADILON A HS 164 NT

DESCRIPTION

PA66 injection moulding grade. Internally lubricated. Fast cycling. Natural colour.

General purpose grade, suitable for parts requiring high productivity like fasteners, connectors, cable ties.

ISO 16396-1: PA66, MN,S14-030

REGIONAL AVAILABILITY: North America, Europe, Asia Pacific, South and Central America, Near East/Africa

MATERIAL HANDLING AND PROCESSING

The material is delivered in moisture-proof packaging ready for processing. Maximum recommended water content for best processing is 0.15%. Typical conditions with a desiccant drier: temperature 80 ° C, dew point -20 ° C or below, time 2-4 h or more. Special care must be taken to avoid moisture absorption and contamination with other polymers when adding regrind material. Colour variation and mechanical properties reduction may occur and should always be carefully monitored.

Injection Molding Processing Parameters

Melt Temperature
270 - 290°C

Mold Temperature
70 - 90°C

Injection Speed
medium

PRODUCT SAFETY AND APPROVALS

For safety instruction please refer to Material Safety Data Sheet

Underwriters Laboratories Inc. certified material www.ul.com

ROHS compliant 2011/65/EU and following amendments

Suitable for materials and articles intended to come into contact directly or indirectly with food in compliance with EU 10/2011 and FDA Title 21CFR Chapter 1, part 177.1500.

Suitable and approved for drinking water contact.

Please get in contact with our Customer Service for drinking water contact approvals and further information.



RADILON A HS 164 NT

PROPERTY	STANDARD	UNIT	VALUE		
			DAM*	Cond**	
PHYSICAL PROPERTIES					
Density			1140		
Moulding shrinkage - Parallel / Normal	290/70/60 ^[1]	ISO 1183	kg/m ³	1.5 / 1.5	
Water Absorption, immersion at 23°C	2mm	ISO 294-4	%	8.9	
Moisture Absorption 23°C - 50%RH	2mm	ISO 62	%	2.1	
Viscosity Index (Sulfuric Acid)		ISO 62	%	135	
		ISO 307	ml/g		
MECHANICAL PROPERTIES					
Tensile Modulus	1mm/min	ISO 527-2/1A	MPa	3000	1300
Stress at Yield	50mm/min	ISO 527-2/1A	MPa	80	50
Yield Strain	50mm/min	ISO 527-2/1A	%	4.6	30
Nominal Strain at Break	50mm/min	ISO 527-2/1A	%	30	>50
Flexural Modulus	2mm/min	ISO 178	MPa	2800	1200
Flexural Strength	2mm/min	ISO 178	MPa	110	65
Charpy Impact Strength	+23°C	ISO 179/1eU	kJ/m ²	N	
Charpy Notched Impact Strength	+23°C	ISO 179/1eA	kJ/m ²	5	15
Charpy Notched Impact Strength	-30°C	ISO 179/1eA	kJ/m ²	4.5	11
THERMAL PROPERTIES					
Melting Temperature	10°C/min	ISO 11357-1/-3	°C	260	
Heat Deflection Temperature	1.80 MPa	ISO 75/2Af	°C	70	
Heat Deflection Temperature	0.45 MPa	ISO 75/2Bf	°C	200	
Vicat Softening Temperature	50°C/h 50N	ISO 306	°C	240	
Coeff. of Linear Therm. Expansion	parallel, 23°C-55°C	ISO 11359-1/-2	E-6/K	95	
Coeff. of Linear Therm. Expansion	normal, 23°C-55°C	ISO 11359-1/-2	E-6/K	94	
FLAMMABILITY PROPERTIES					
Flammability	0.4mm	UL 94	class	V-2	
Flammability	0.8mm	UL 94	class	V-2	
Glow Wire Flammability Index	0.75mm	IEC 60695-2-12	°C	960	
Glow Wire Flammability Index	1mm	IEC 60695-2-12	°C	900	
Glow Wire Flammability Index	2mm	IEC 60695-2-12	°C	900	
Automotive Interior Flammability	3mm	ISO 3795	mm/min	0	
ELECTRICAL PROPERTIES					
Volume Resistivity	500V	IEC 62631-3-1	Ohm*m	1E13	1E11
Surface Resistivity	500V	IEC 62631-3-2	Ohm	1E12	1E10
Comparative Tracking Index	SoL.A	IEC 60112	V	600	

*: DAM = Dry As Moulded state according to ISO 16396-2, **: Cond = Conditioned state similar to ISO 1110


1: Melt Temperature [°C] / Mold Temperature [°C] / Cavity Pressure [MPa]




RADILON A HS 164 NT

DIAGRAMS


Viscosity-shear rate

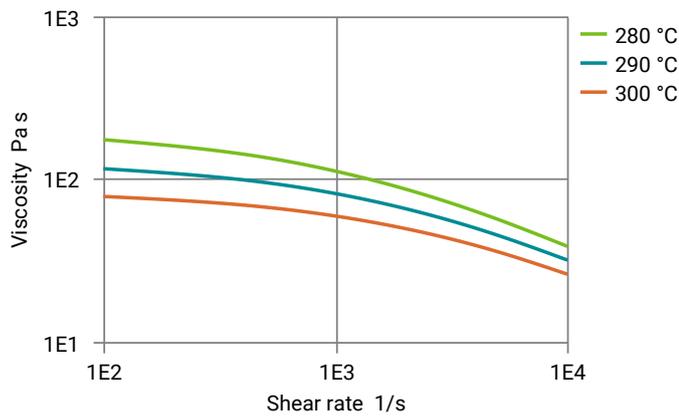


Shearstress-shear rate

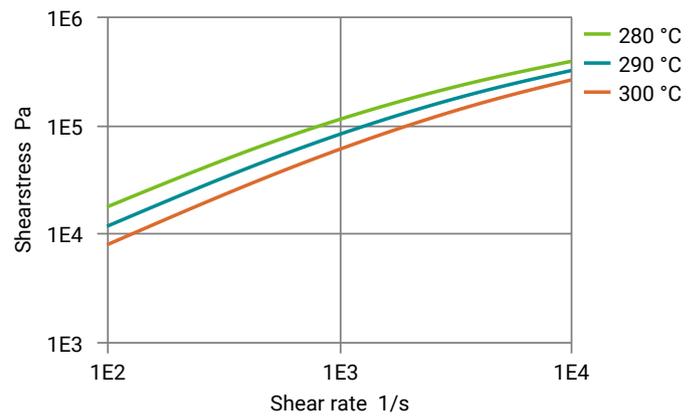

Stress-strain (cond.)

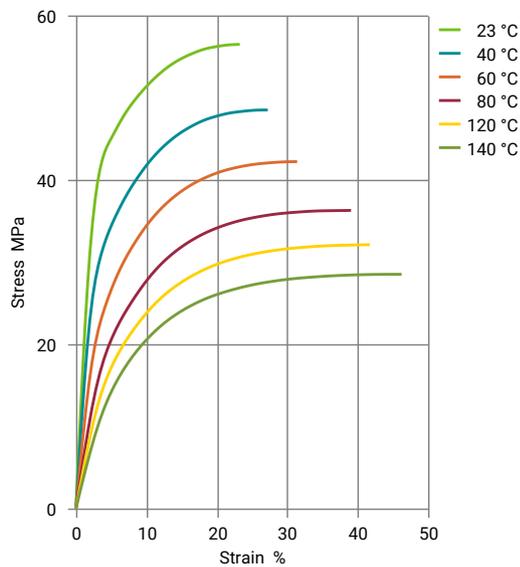

Stress-strain (dry)

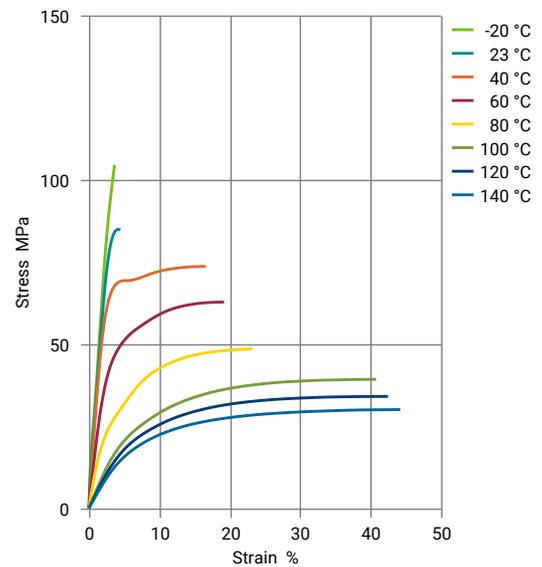

RADILON A HS 164 NT

Specific volume-temperature (pvT)

Thermal expansion

