

TECHNICAL DATA SHEET

Akulon® F130-C1

Envalior
PA6

Processing

Film extrusion, Other extrusion, Casting

Delivery Form

Pellets

Additives

Lubricants

Certifications

Food contact

Product Text

Product Information

Film Extrusion, Medium Viscosity, Lubricated, Food Contact Quality

ISO 1043 PA6

Thermal Properties	Value	Unit	Standard
Melting temperature, 10°C/min	220	°C	ISO 11357-1/-3
Coeff. of linear therm. expansion, parallel	90	E-6/K	ISO 11359-1/-2
Other Properties	Value	Unit	Standard
Water absorption	9	%	Sim. to ISO 62
Humidity absorption	2.8	%	Sim. to ISO 62
Density	1130	kg/m ³	ISO 1183
Film Properties	Value	Unit	Standard
Stress at yield, parallel	31	MPa	ISO 527-3
Maximum stress, parallel	82	MPa	ISO 527-3
Maximum strain, parallel	350	%	ISO 527-3
Trouser tear resistance, parallel	32	N/mm	ISO 6383-1
Dynamic coefficient of friction	1		ISO 8295
WVTR, 23°C/85%r.h.	35	g/(m ² *d)	ISO 15106-1/-2
Oxygen transmission rate, 23°C/0%r.h.	26	cm ³ /(m ² *d*bar)	ISO 15105-1/-2
Oxygen transmission rate, 23°C/85%r.h.	38	cm ³ /(m ² *d*bar)	ISO 15105-1/-2
Type of extrusion	cast		


Akulon® F130-C1

Envalior

Film Properties	Value	Unit	Standard
Thickness of specimen	0.05	mm	

Material Specific Properties	Value	Unit	Standard
Viscosity number	196	cm ³ /g	ISO 307, 1157, 1628

Diagrams

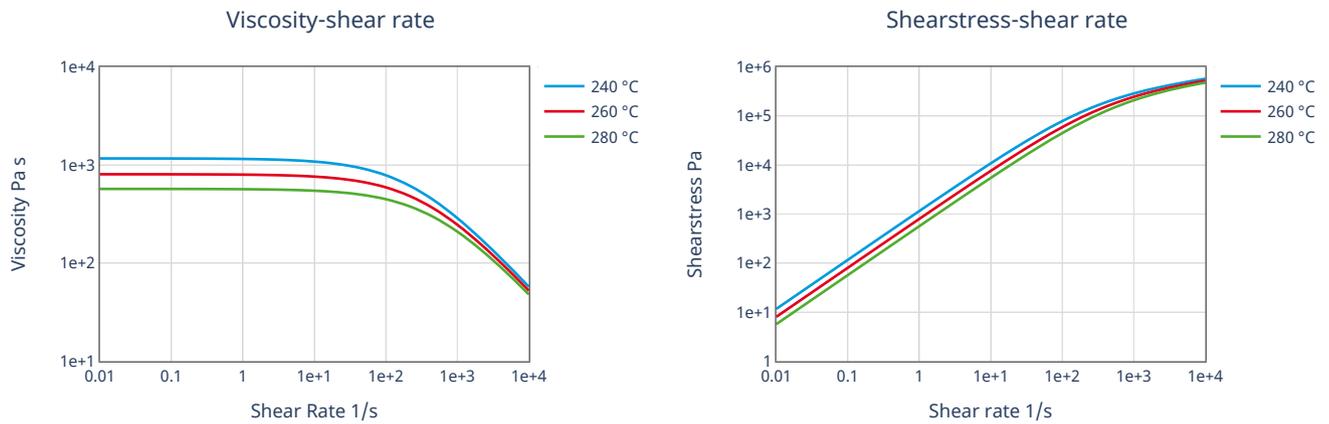

Processing Information

Film extrusion

Processing of Akulon® Film Grades