

TECHNICAL DATA SHEET

Akulon® Ultraflow K-FG0

Envalior
PA6-GF50

Processing

Injection molding

Delivery Form

Pellets

Product Text
Product Information

50% Glass Reinforced, High Flow

ISO 1043 PA6-GF50



Processing/Physical Characteristics	Value	Unit	Standard
Molding shrinkage, parallel	0.2	%	ISO 294-4, 2577
Molding shrinkage, normal	0.9	%	ISO 294-4, 2577
Density of melt	1357	kg/m ³	
Thermal conductivity of melt	0.3	W/(m K)	
Spec. heat capacity of melt	1870	J/(kg K)	
Eff. thermal diffusivity	1.18E-7	m ² /s	
Mechanical Properties	Value	Unit	Standard
Tensile modulus	16500	MPa	ISO 527
Stress at break	220	MPa	ISO 527
Strain at break	2.5	%	ISO 527
Poisson's ratio	0.35		ISO 527
Charpy impact strength, +23°C	90	kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	85	kJ/m ²	ISO 179/1eU
Charpy notched impact strength, +23°C	15	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	12	kJ/m ²	ISO 179/1eA
Thermal Properties	Value	Unit	Standard
Melting temperature, 10°C/min	220	°C	ISO 11357-1/-3
Temp. of deflection under load, 1.80 MPa	210	°C	ISO 75-1/-2

Akulon® Ultraflow K-FG0

Envalior





Thermal Properties	Value	Unit	Standard
Temp. of deflection under load, 0.45 MPa	220	°C	ISO 75-1/-2
Coeff. of linear therm. expansion, parallel	10	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	50	E-6/K	ISO 11359-1/-2
Electrical Properties	Value	Unit	Standard
Relative permittivity, 100Hz	3.5		IEC 62631-2-1
Relative permittivity, 1MHz	5.2		IEC 62631-2-1
Dissipation factor, 100Hz	50	E-4	IEC 62631-2-1
Dissipation factor, 1MHz	150	E-4	IEC 62631-2-1
Volume resistivity	1E13	Ohm*m	IEC 62631-3-1
Surface resistivity	1E14	Ohm	IEC 62631-3-2
Comparative tracking index	600		IEC 60112
Other Properties	Value	Unit	Standard
Water absorption	4.5	%	Sim. to ISO 62
Humidity absorption	1.4	%	Sim. to ISO 62
Density	1560	kg/m ³	ISO 1183

Diagrams

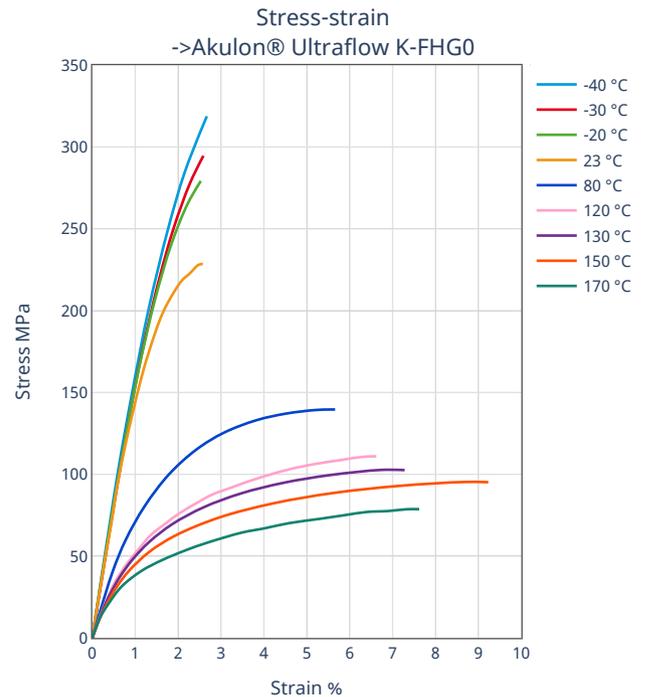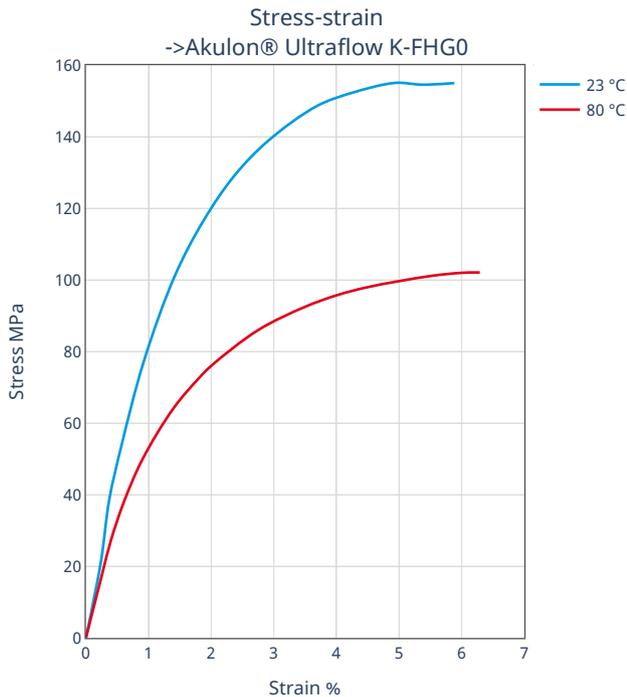





Akulon® Ultraflow K-FG0

Envalior

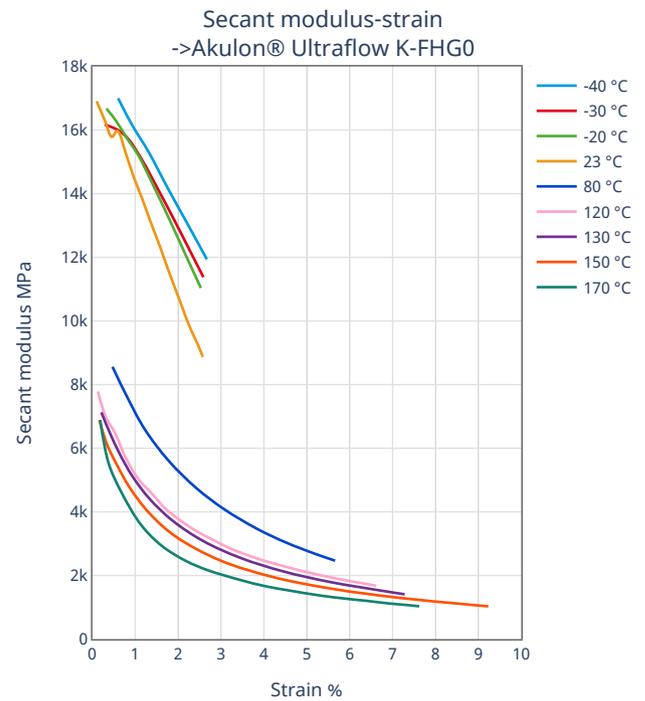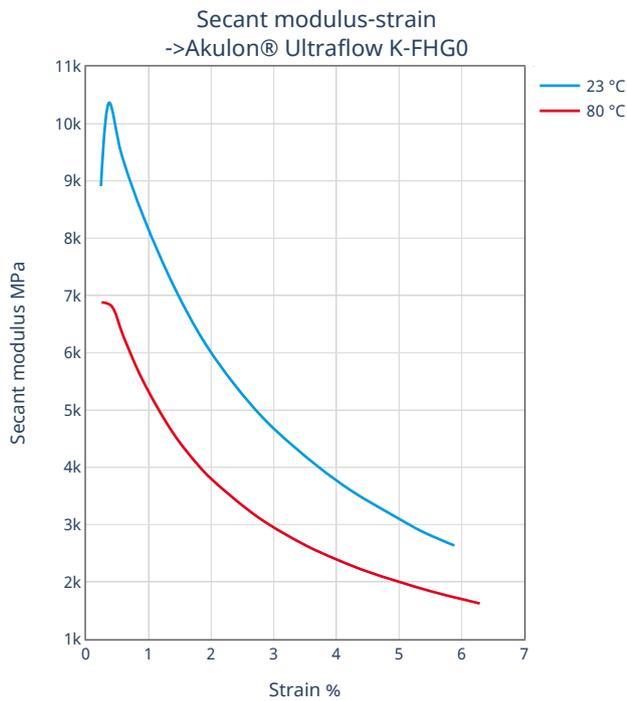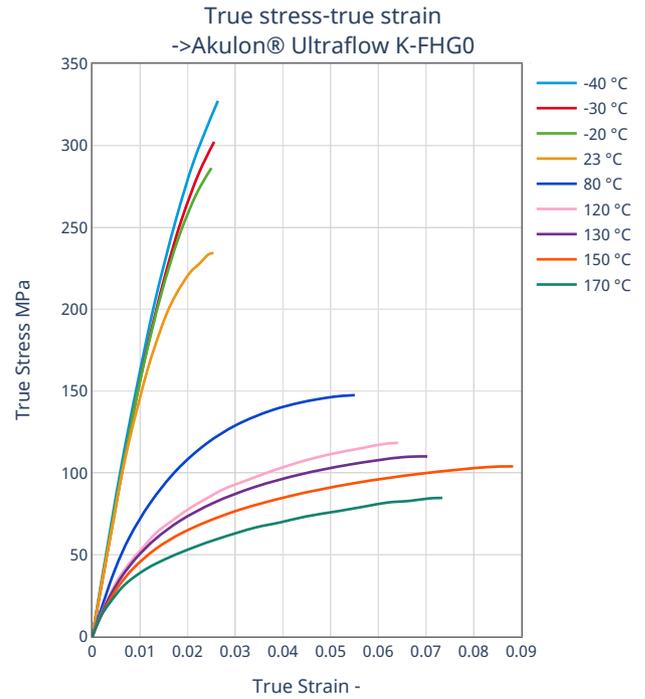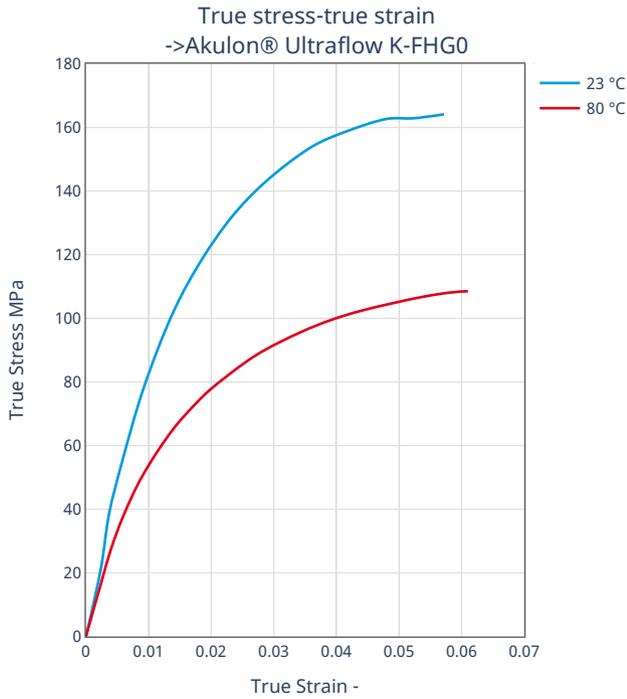





Akulon® Ultraflow K-FG0

Envalior

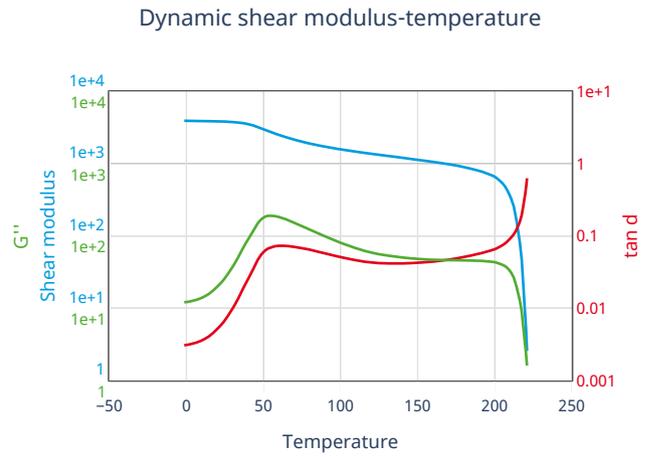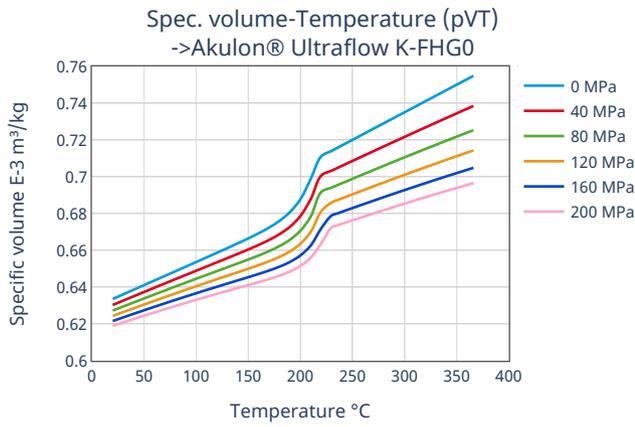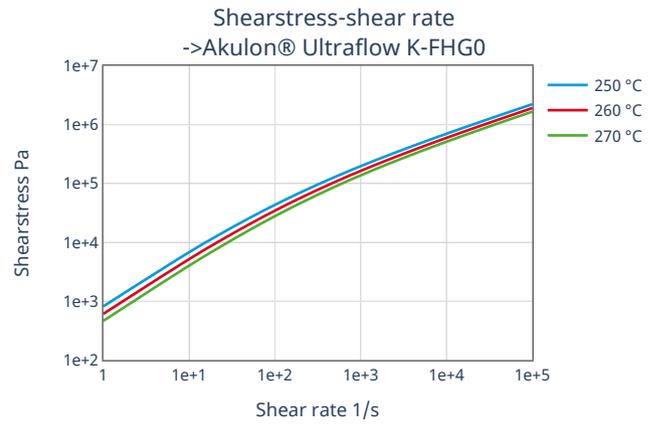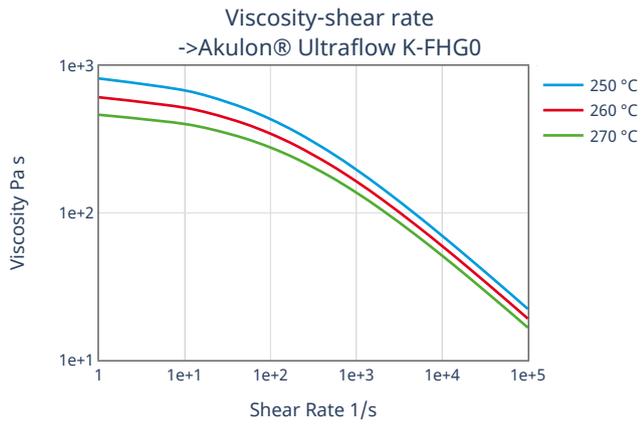




Akulon® Ultraflow K-FG0

Envalior

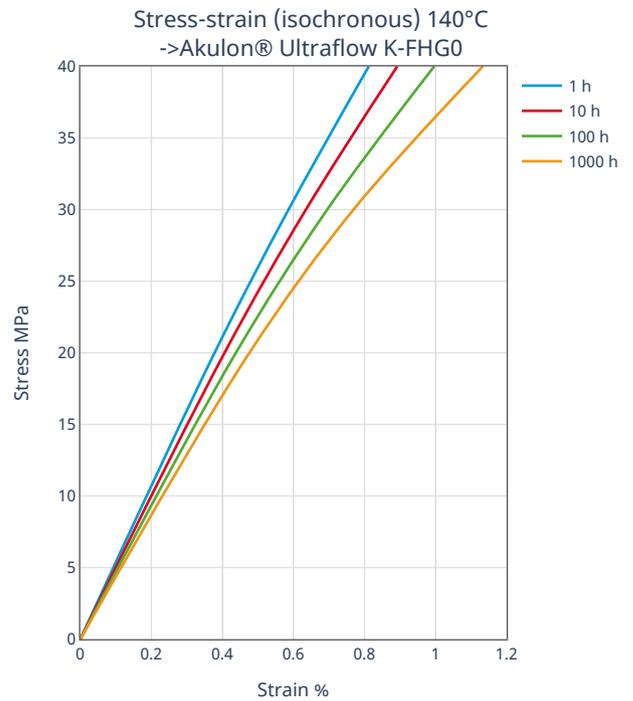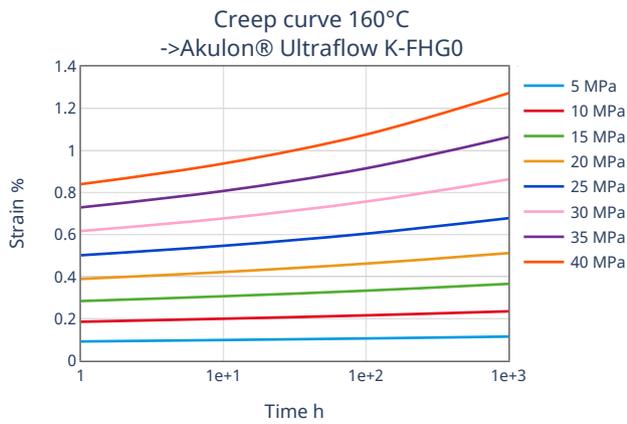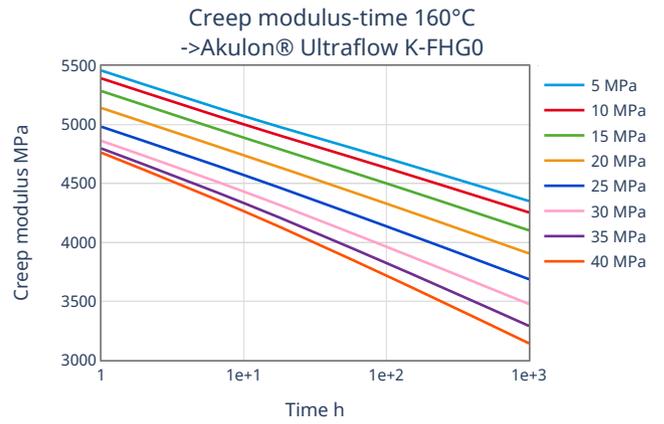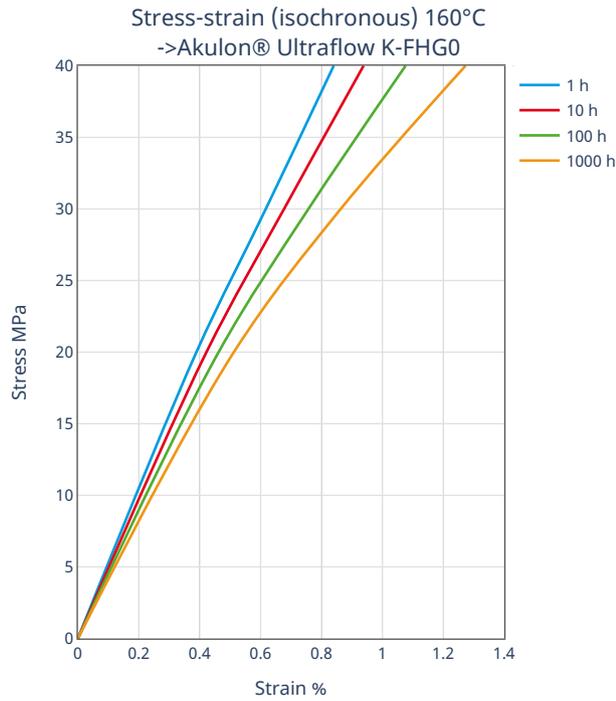


Akulon® Ultraflow K-FG0

Envalior

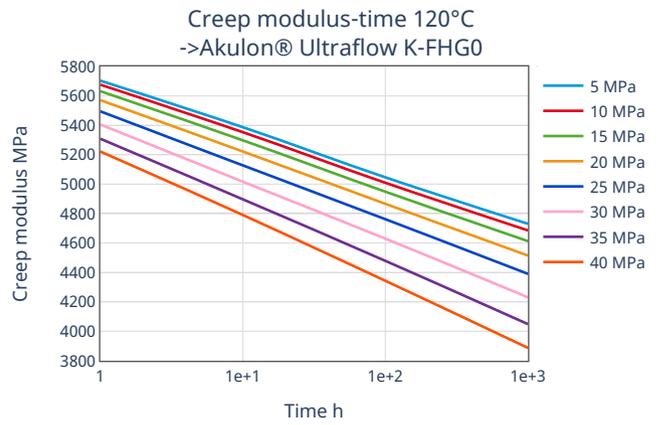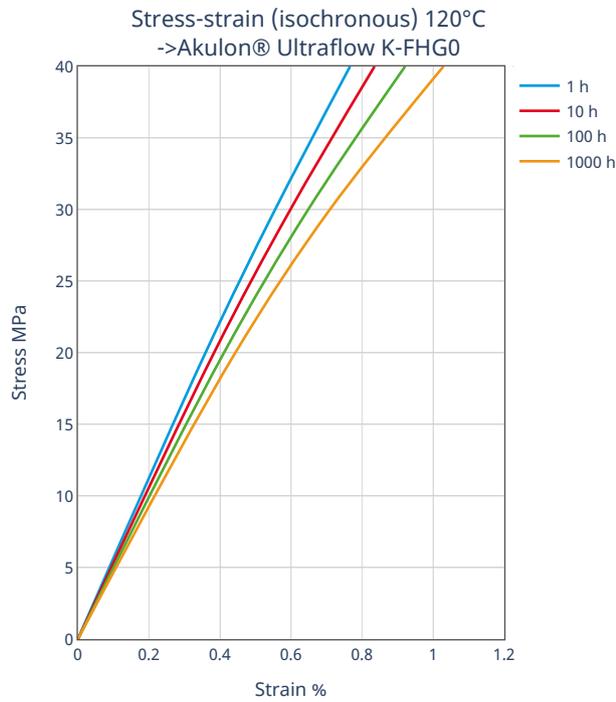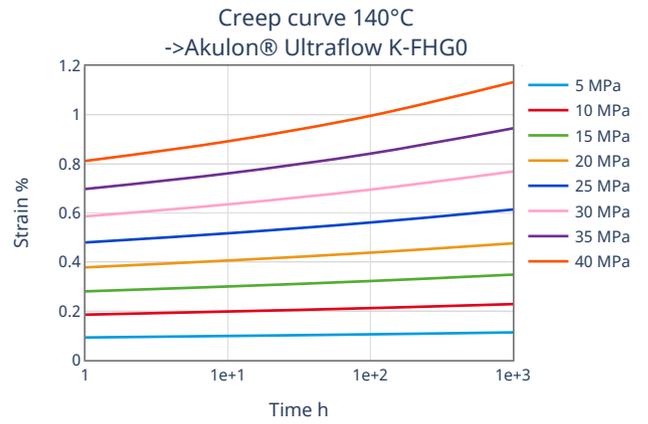

Akulon® Ultraflow K-FG0

Envalior

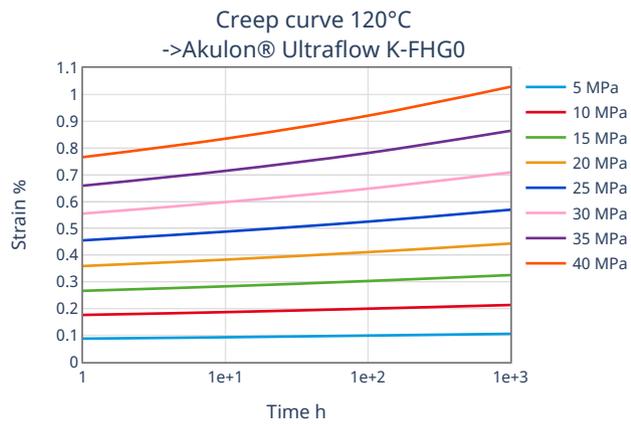

Processing Information

Injection molding

Injection Molding Recommendations