

TECHNICAL DATA SHEET

Akulon® K224-G6

Envalior
PA6-GF30

Processing

Injection molding

Delivery Form

Pellets

Additives

Release agent

Product Text

Product Information

30% Glass Reinforced

ISO 1043 PA6-GF30

Akulon® - the all-purpose polyamide

Find the right plastic for your product in our Plastics Finder

Processing/Physical Characteristics	Value	Unit	Standard
Melt volume-flow rate, MVR	40	cm ³ /10min	ISO 1133
Temperature	275	°C	
Load	5	kg	
Molding shrinkage, parallel	0.3	%	ISO 294-4, 2577
Molding shrinkage, normal	0.9	%	ISO 294-4, 2577
Density of melt	1150	kg/m ³	
Thermal conductivity of melt	0.27	W/(m K)	
Spec. heat capacity of melt	2110	J/(kg K)	
Eff. thermal diffusivity	1.12E-7	m ² /s	
Mechanical Properties	Value	Unit	Standard
Tensile modulus	9700	MPa	ISO 527
Stress at break	185	MPa	ISO 527
Strain at break	3.8	%	ISO 527
Poisson's ratio	0.35		ISO 527
Charpy impact strength, +23°C	95	kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	75	kJ/m ²	ISO 179/1eU

Akulon® K224-G6





Envalior

Mechanical Properties	Value	Unit	Standard
Charpy notched impact strength, +23°C	14	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	11	kJ/m ²	ISO 179/1eA
Shore D hardness	85		ISO 7619-1
Thermal Properties	Value	Unit	Standard
Melting temperature, 10°C/min	220	°C	ISO 11357-1/-3
Temp. of deflection under load, 1.80 MPa	207	°C	ISO 75-1/-2
Temp. of deflection under load, 0.45 MPa	220	°C	ISO 75-1/-2
Vicat softening temperature, B	216	°C	ISO 306
Coeff. of linear therm. expansion, parallel	20	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	70	E-6/K	ISO 11359-1/-2
Burning behav. at 1.5 mm nom. thickn.	HB	class	IEC 60695-11-10
Thickness tested	1.5	mm	
Yellow card available	yes		
Burning behav. at thickness h	HB	class	IEC 60695-11-10
Thickness tested	3	mm	
Yellow card available	yes		
Burning rate, FMVSS, thickness 1 mm	45	mm/min	ISO 3795 (FMVSS 302)
Electrical Properties	Value	Unit	Standard
Relative permittivity, 100Hz	3.5		IEC 62631-2-1
Relative permittivity, 1MHz	3.3		IEC 62631-2-1
Dissipation factor, 100Hz	50	E-4	IEC 62631-2-1
Dissipation factor, 1MHz	150	E-4	IEC 62631-2-1
Volume resistivity	1E13	Ohm*m	IEC 62631-3-1
Surface resistivity	1E14	Ohm	IEC 62631-3-2
Electric strength	30	kV/mm	IEC 60243-1
Comparative tracking index	600		IEC 60112
Other Properties	Value	Unit	Standard
Water absorption	6.3	%	Sim. to ISO 62
Humidity absorption	1.9	%	Sim. to ISO 62
Density	1350	kg/m ³	ISO 1183

Diagrams

Akulon® K224-G6


Envalior

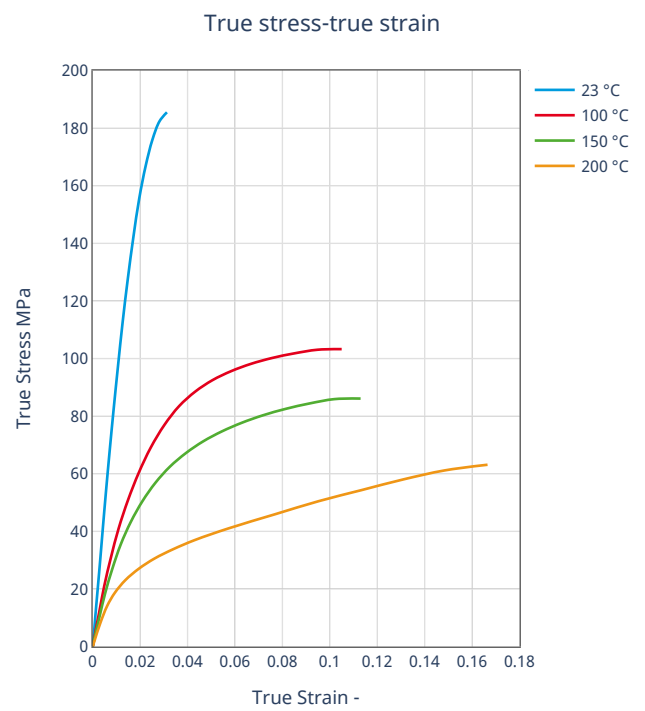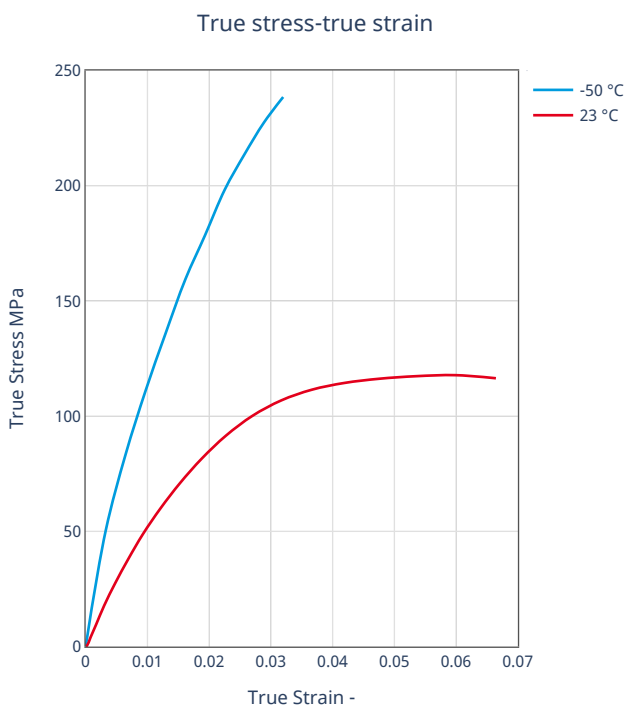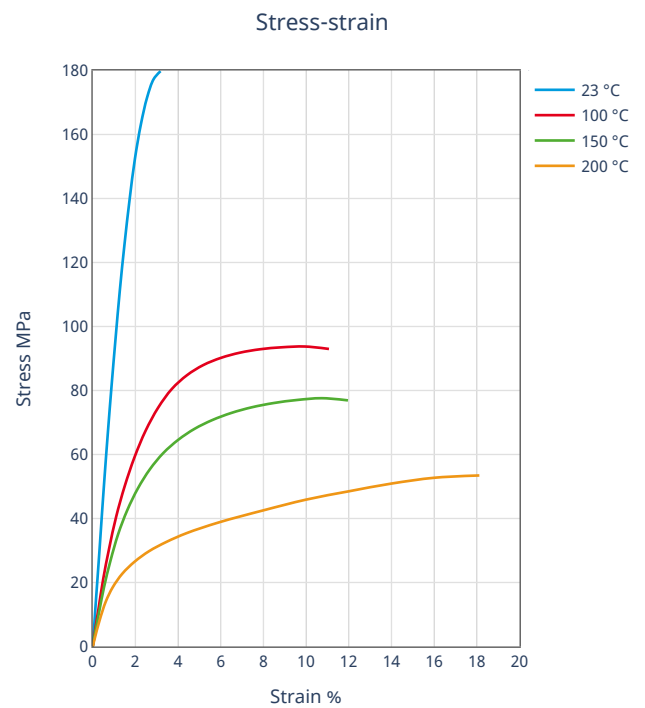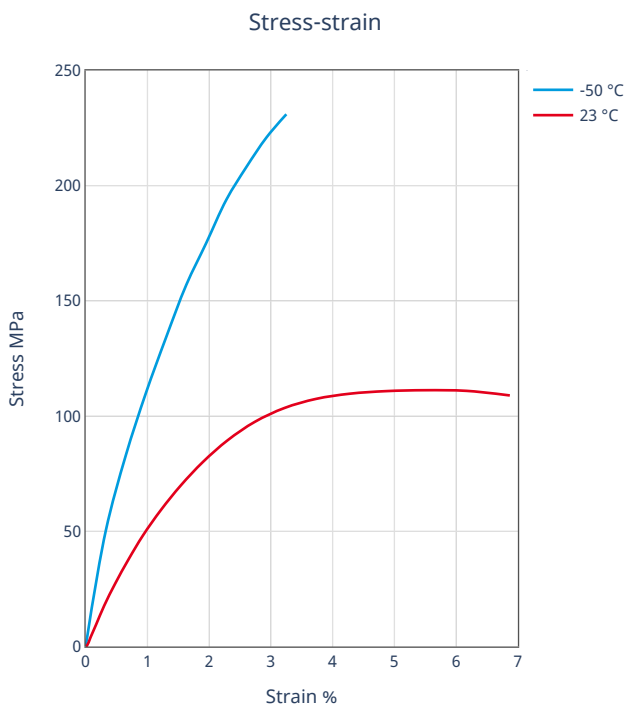


Akulon® K224-G6

Envalior


Secant modulus-strain

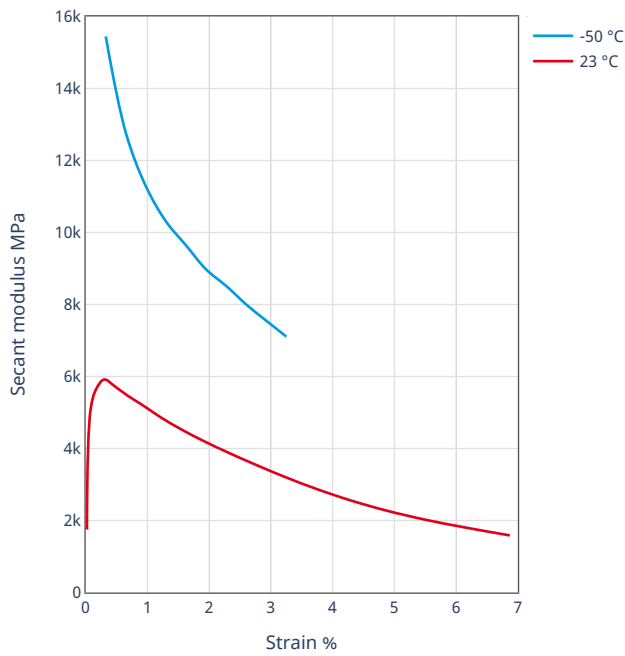


Secant modulus-strain

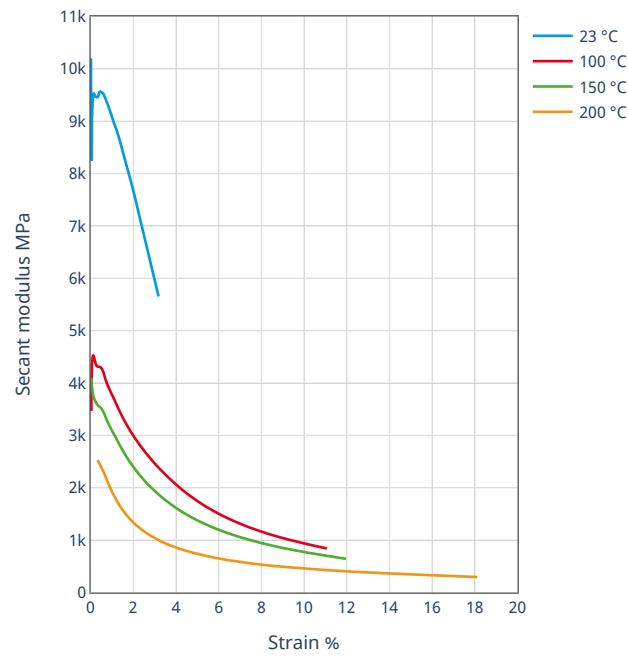

Viscosity-shear rate




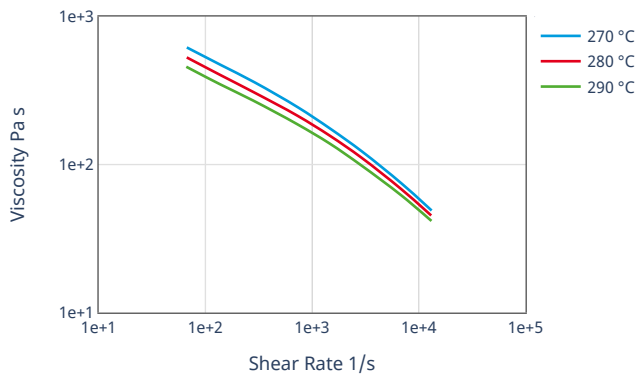


Shearstress-shear rate

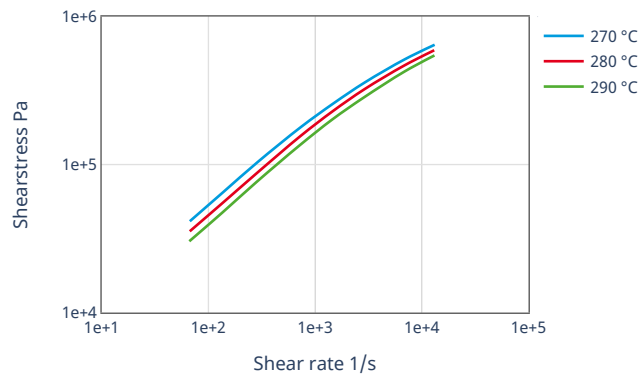



Akulon® K224-G6

Envalior

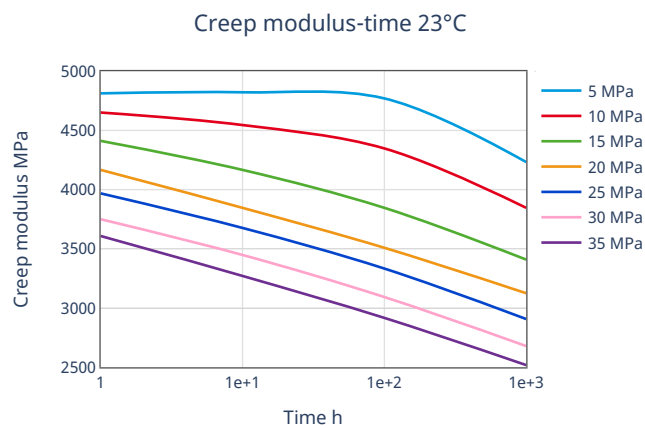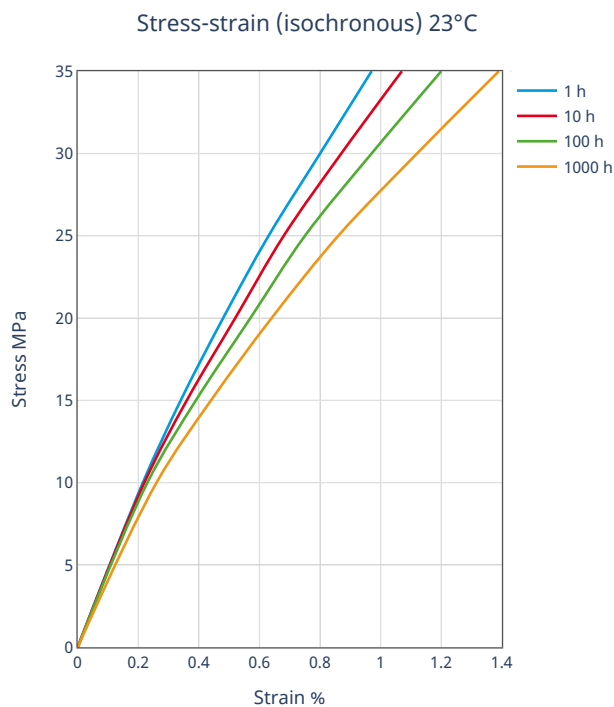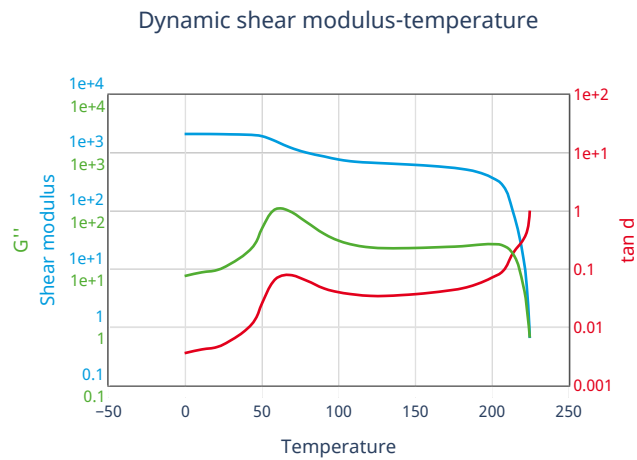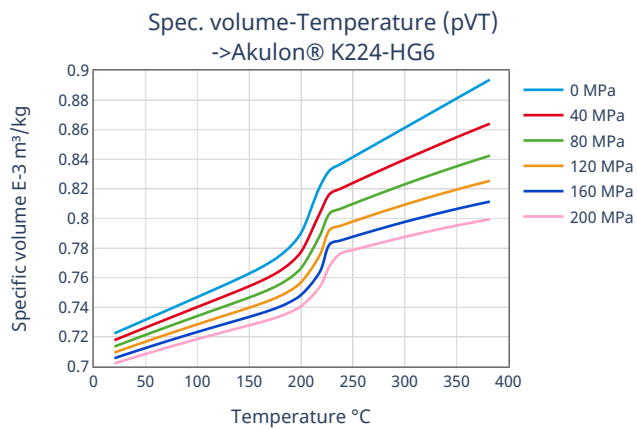

Akulon® K224-G6

Envalior

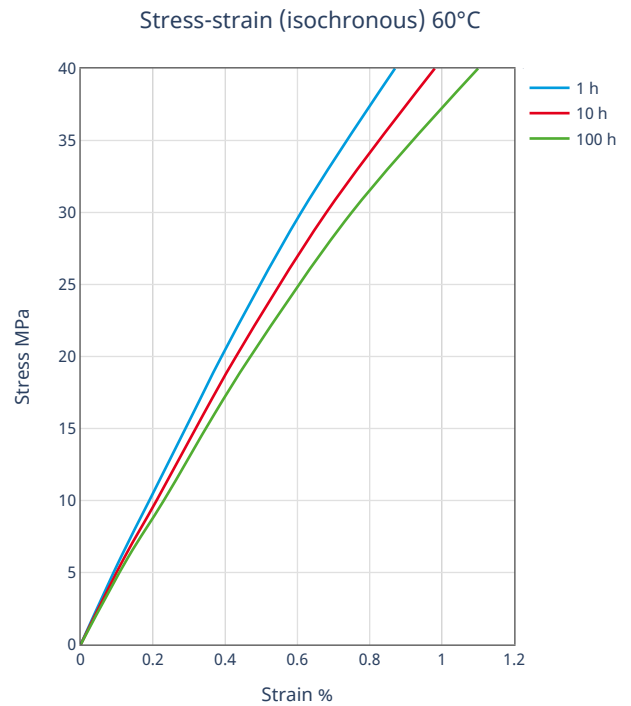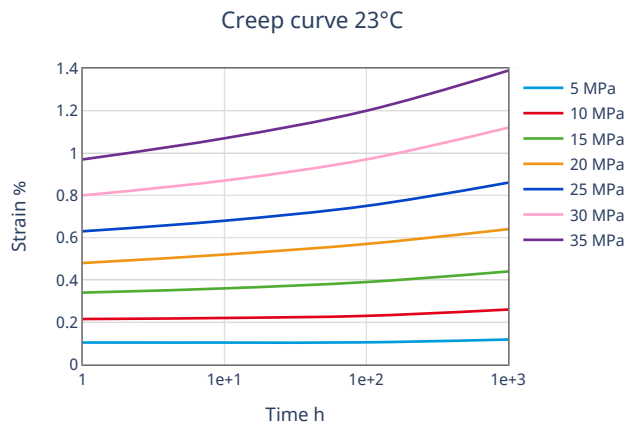

Processing Information

Injection molding

Injection Molding Recommendations

Steel recommendations for molds screws and barrels

Trouble shooting guideline for injection molding