Polyethylene Stamylex™ 1046F

Description

Stamylex 1046F is an octene based linear low density polyethylene produced in a solution polymerisation process using a Ziegler-Natta catalyst.

CAS-No. 26221-73-8

Applications

Stamylex 1046F Demonstrated applications include:

Pallet stretch wrap

Seal layers for film structures applied in general packaging applications

Special Features

Stamylex 1046F is optimised to deliver:

Excellent mechanical properties Excellent sealing characteristics Excellent optical properties

Physical Properties


_

Property	Typical Value Data should not be used for specifi	Test Method
Density (23 °C)	919 kg/m³	ISO 1183
Melt Flow Rate (190 °C/2,16 kg)	4,4 g/10min	ISO 1133
Melting temperature (DSC)	122 °C	ISO 11357-3
Vicat softening temperature (10 N)	98 °C	ISO 306

HongRong Engineering Plastics Co.,Ltd. Head Office Tel. +85-2-6957-5415 Research Center Tel.+188 1699 6168



Stamylex 1046F

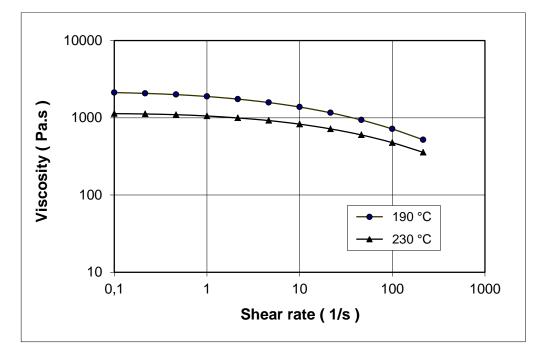

Storage

Stamylex 1046F This polymer, like most polymers, is combustible so the usual precautions concerning ignition sources should be taken in warehouses and storage rooms. Where large quantities are kept in store, it is necessary to observe the normal rules for orderly stock control and it is recommended to use the first in – first out (FIFO) principle for stock planning. The products should be stored in a dry and clean facility to prevent contamination and not be exposed to direct sunlight as this may lead to quality deterioration. These materials have a shelf life of at least 3 (three) years after date of production, provided the material remains in its original unopened packaging and are stored under the storage conditions as described in this document. "Shelf life" means that there will not be any substantial difference compared to the agreed specification. The date of batch creation can be derived from the batch code printed on the bags representing. YYMMDDHHLL (LL being two letters with no reference to the production time). Borealis Plastomers generally does not sell prime material older than 2 (two) years unannounced.

Related Documents

The following related documents are available on request, and represent various aspects on the usability, safety, recovery and disposal of the product.

"Safety data sheet" / "Product safety information sheet" Statement on chemicals, regulations and standards General statement on compliance to food contact regulations Statement on polymer additives and BSE

HongRong Engineering Plastics Co.,Ltd. Head Office Tel. +85-2-6957-5415 Research Center Tel.+188 1699 6168

