

TENAC™-C 9520

Asahi Kasei Corporation - Acetal (POM) Copolymer

General Information

General			
Features AKEP website	• Flow, High		
Uses	• Engineering Parts	• Gears	• Housings
Multi-Point Data	• Isothermal Stress vs. Strain (ISO 11403)		
Part Marking Code (ISO11469) (ISO 11469)	• >POM<		

ASTM & ISO Properties¹

Physical	Nominal Value	Unit	Test Method
Density / Specific Gravity	1.41	g/cm ³	ASTM D792 ISO 1183
Melt Mass-Flow Rate (MFR) (190°C/2.16 kg)	70	g/10 min	ISO 1133
Molding Shrinkage - Flow	1.6 to 2.0	%	Internal Method
Water Absorption (24 hr, 23°C, 50% RH)	0.20	%	ASTM D570
Mechanical	Nominal Value	Unit	Test Method
Tensile Modulus	2900	MPa	ISO 527-1
Tensile Stress (Yield)	65.0	MPa	ISO 527-2
Tensile Elongation (Break)	20	%	ISO 527-2
Flexural Modulus	2700	MPa	ISO 178
Impact	Nominal Value	Unit	Test Method
Charpy Notched Impact Strength	3.5	kJ/m ²	ISO 179
Thermal	Nominal Value	Unit	Test Method
Deflection Temperature Under Load 1.8 MPa, Unannealed	100	°C	ISO 75-2/A
CLTE - Flow	1.0E-4	cm/cm/°C	ISO 11359-2



TENAC™-C 9520

Asahi Kasei Corporation - Acetal (POM) Copolymer


Processing Information		
Injection	Nominal Value	Unit
Drying Temperature - Hot Air Dryer	80 to 90	°C
Drying Time - Hot Air Dryer	3.0 to 4.0	hr
Processing (Melt) Temp	180 to 210	°C
Mold Temperature	> 60	°C



TENAC™-C 9520
Asahi Kasei Corporation - Acetal (POM) Copolymer

Curve Data

Isothermal Stress vs. Strain (ISO 11403)

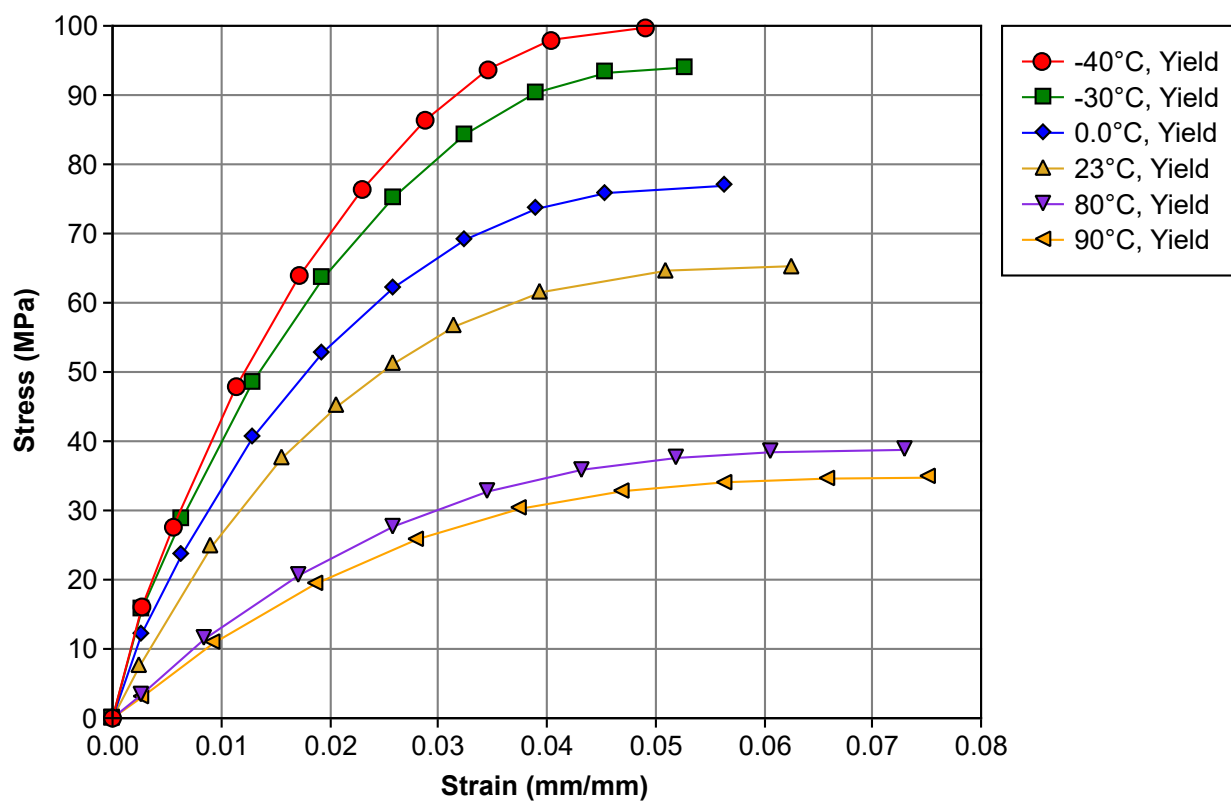

TENAC™-C 9520

Asahi Kasei Corporation - Acetal (POM) Copolymer

Notes

¹ Typical properties: these are not to be construed as specifications.

