

Queo™ 8203

Octene-1 Plastomer

DATA SHEET

Description and Attributes

Queo™ 8203 is an ethylene based octene plastomer produced in a solution polymerisation process using a metallocene catalyst.

Supplied as free flowing pellets, Queo 8203 is designed to offer:

- Favourable melt strength - processability balance.
- Flexibility
- Outstanding toughness and puncture resistance
- Low temperature flex-cracking and impact resistance
- Low dielectric constant and dissipation factor
- High clarity
- High filler and oil acceptance
- Excellent polyolefin compatibility

Applications

Demonstrated applications include :

- Impact modification of PP
- Roof coverings
- Tunnel linings
- Flexible low voltage insulation
- Halogen free flame retardant compounds
- Blow moulded articles
- Soft foams
- High strength flexible films
- Specialty stretch film applications

Additives

Queo 8203 contains processing stabilizers.


General properties	Units	Typical values [1]	Method
Melt Flow Rate (2.16 kg/190°C)	dg/min	3.0	ISO 1133
Density (23°C)	kg/m ³	882	ISO 1183
Shore A hardness	--	85	ISO 868
Shore D hardness	--	<30	ISO 868
DSC peak melting point	°C	74	ISO 11357
Vicat softening temperature (at 10 N)	°C	50	ISO 306
Brittleness temperature	°C	< -76	ASTM D746

Moulded plaque properties [2]

Tensile strength at break	MPa	22	ISO 527-2 (5A)
Elongation at break	%	820	ISO 527-2 (5A)
Flexural modulus	MPa	24	ISO 178
Notched Izod at 23°C	kJ/m ²	No break	ISO 180 (1A)
Environmental stress crack resistance	hr	> 1000	ASTM D1693 (method B)

[1] Values are typical and not to be interpreted as specifications.

[2] Specifics of compression moulded test specimen.

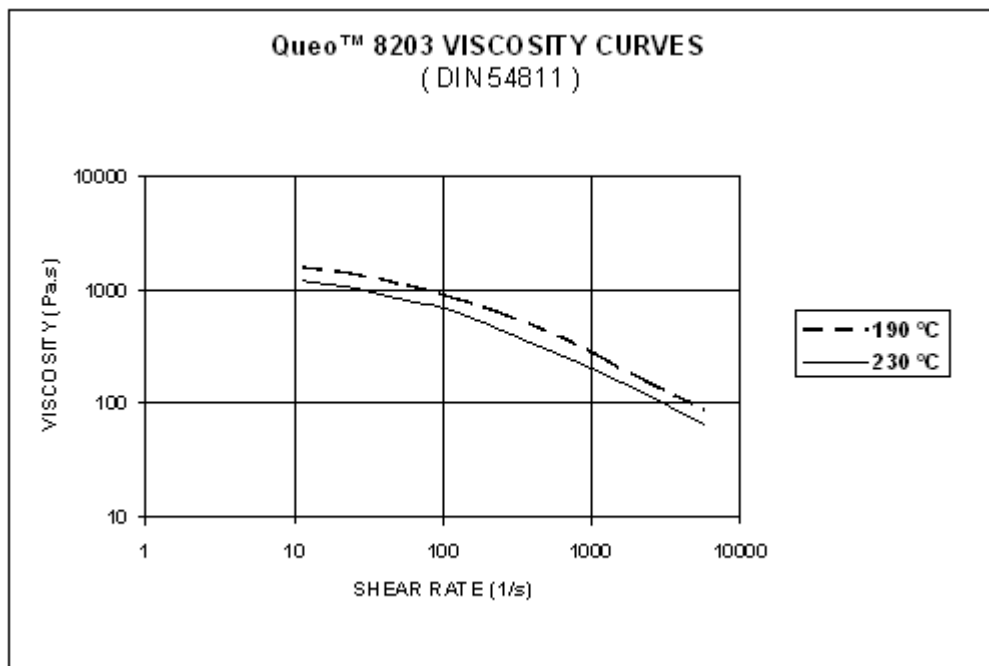

Food Law Compliance and Product Handling

Queo 8203 can - in principle - be used in food contact applications in various EU Member States and in the USA (FDA). Migration or use limitations may apply. Please contact your sales representative for more detailed information and/or actual compliance certification documents.

Specific information on material safety aspects of Queo 8203 will be provided upon request.

Standard Packaging

Queo 8203 is supplied as free flowing pellets in bulk or packaged in 25 kg bags. The 25 kg bags are assembled on a heat treated pallet to a net weight of 1'375 kg and covered with a stretch hood.