

VECTRA® E440i - LCP

Description

Mineral and glass filled grade with low warp, easy flow and smooth surface appearance.

Mineral and glass filled grade with low warp, easy flow and smooth surface appearance. Chemical abbreviation according to ISO 1043-1 : LCP

Inherently flame retardant. FDA compliant

Physical properties	Value	Unit	Test Standard
Density	1770	kg/m ³	ISO 1183
Molding shrinkage, parallel (flow)	0	%	ISO 294-4, 2577
Molding shrinkage, transverse normal	0.5	%	ISO 294-4, 2577


Mechanical properties	Value	Unit	Test Standard
Tensile modulus	12000	MPa	ISO 527-1, -2
Tensile stress at break, 5mm/min	110	MPa	ISO 527-1, -2
Tensile strain at break, 5mm/min	2	%	ISO 527-1, -2
Flexural modulus, 23°C	13000	MPa	ISO 178
Flexural strength, 23°C	160	MPa	ISO 178
Flexural strain at break	2	%	ISO 178
Charpy impact strength, 23°C	24	kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	5	kJ/m ²	ISO 179/1eA
Izod impact notched, 23°C	9	kJ/m ²	ISO 180/1A
Izod impact unnotched, 23°C	25	kJ/m ²	ISO 180/1U

Thermal properties	Value	Unit	Test Standard
Melting temperature, 10°C/min	335	°C	ISO 11357-1/-3
DTUL at 1.8 MPa	260	°C	ISO 75-1, -2
DTUL at 8.0 MPa	177	°C	ISO 75-1, -2
Coeff. of linear therm expansion, parallel	0.11	E-4/°C	ISO 11359-2
Coeff. of linear therm expansion, normal	0.2	E-4/°C	ISO 11359-2
Flammability at thickness h	V-0	class	UL 94

Electrical properties	Value	Unit	Test Standard
Volume resistivity, 23°C	1E14	Ohm*m	IEC 62631-3-1
Surface resistivity, 23°C	>1E15	Ohm	IEC 62631-3-2
Comparative tracking index	PLC 3	-	UL 746
CTI 100 drops	175	V	IEC 60112



True Stress-strain

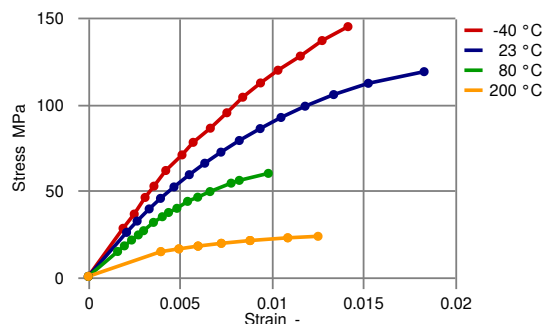

Typical injection moulding processing conditions

Pre Drying	Value	Unit
Necessary low maximum residual moisture content	0.01	%
Drying time	6	h
Drying temperature	150 - 170	°C
Temperature	Value	Unit
Hopper temperature	20 - 30	°C
Feeding zone temperature	60 - 80	°C
Zone1 temperature	315 - 325	°C
Zone2 temperature	320 - 330	°C
Zone3 temperature	330 - 340	°C
Zone4 temperature	330 - 340	°C
Nozzle temperature	335 - 345	°C
Melt temperature	340 - 350	°C
Mold temperature	80 - 120	°C
Hot runner temperature	335 - 345	°C
Pressure	Value	Unit
Injection pressure	500 - 1500	bar
Hold pressure	500 - 1500	bar
Back pressure max.	30	bar
Speed	Value	
Injection speed	very fast	
Screw Speed	Value	Unit
Screw speed diameter, 16mm	200	RPM
Screw speed diameter, 25mm	140	RPM
Screw speed diameter, 40mm	80	RPM



VECTRA® E440i - LCP

Other text information

Pre-drying

VECTRA should in principle be predried. Because of the necessary low maximum residual moisture content the use of dry air dryers is recommended. The dew point should be $\leq -40^{\circ}\text{C}$. The time between drying and processing should be as short as possible.

Longer pre-drying times/storage

For subsequent storage of the material in the dryer until processed the temperature does not need to be lowered for grades A, B, C, D and V ($\leq 24\text{ h}$).

Characteristics

Special Characteristics	Flame retardant, High flow, Lead-free soldering, Low warpage, Specialty appearance
Product Categories	Mineral/Glass reinforced

General Disclaimer

NOTICE TO USERS: Values shown are based on testing of laboratory test specimens and represent data that fall within the standard range of properties for natural material. These values alone do not represent a sufficient basis for any part design and are not intended for use in establishing maximum, minimum, or ranges of values for specification purposes. Colorants or other additives may cause significant variations in data values. Properties of molded parts can be influenced by a wide variety of factors including, but not limited to, material selection, additives, part design, processing conditions and environmental exposure. Any determination of the suitability of a particular material and part design for any use contemplated by the users and the manner of such use is the sole responsibility of the users, who must assure themselves that the material as subsequently processed meets the needs of their particular product or use. To the best of our knowledge, the information contained in this publication is accurate; however, we do not assume any liability whatsoever for the accuracy and completeness of such information. The information contained in this publication should not be construed as a promise or guarantee of specific properties of our products. It is the sole responsibility of the users to investigate whether any existing patents are infringed by the use of the materials mentioned in this publication. Moreover, there is a need to reduce human exposure to many materials to the lowest practical limits in view of possible adverse effects. To the extent that any hazards may have been mentioned in this publication, we neither suggest nor guarantee that such hazards are the only ones that exist. We recommend that persons intending to rely on any recommendation or to use any equipment, processing technique or material mentioned in this publication should satisfy themselves that they can meet all applicable safety and health standards. We strongly recommend that users seek and adhere to the manufacturer's current instructions for handling each material they use, and entrust the handling of such material to adequately trained personnel only. Please call the telephone numbers listed for additional technical information. Call Customer Services for the appropriate Materials Safety Data Sheets (MSDS) before attempting to process our products. The products mentioned herein are not intended for use in medical or dental implants.

Trademark

© 2022 Celanese or its affiliates. All rights reserved. Celanese®, registered C-ball design and all other trademarks identified herein with ®, TM, SM, unless otherwise noted, are trademarks of Celanese or its affiliates. Fortron is a registered trademark of Fortron Industries LLC. KEPITAL is a registered trademark of Korea Engineering Plastics Company, Ltd.

