

Zytel® 70G30L NC010

NYLON RESIN

Common features of Zytel® nylon resin include mechanical and physical properties such as high mechanical strength, excellent balance of stiffness and toughness, good high temperature performance, good electrical and flammability properties, good abrasion and chemical resistance. In addition, Zytel® nylon resins are available in different modified and reinforced grades to create a wide range of products with tailored properties for specific processes and end-uses. Zytel® nylon resin, including most flame retardant grades, offer the ability to be coloured.

The good melt stability of Zytel® nylon resin normally enables the recycling of properly handled production waste. If recycling is not possible, we recommend, as the preferred option, incineration with energy recovery (-31kJ/g of base polymer) in appropriately equipped installations. For disposal, local regulations have to be observed.

Zytel® nylon resin typically is used in demanding applications in the automotive, furniture, domestic appliances, sporting goods and construction industry.

Zytel® 70G30L NC010 is a 30% glass fiber reinforced polyamide 66 resin for injection moulding.

Product information

Resin Identification	PA66-GF30	ISO 1043
Part Marking Code	>PA66-GF30<	ISO 11469
ISO designation	ISO 16396-PA66,GF30,M1GNR,S14-100	

Rheological properties

	dry/cond.		
Viscosity number	153 / *	cm ³ /g	ISO 307, 1157, 1628
Moulding shrinkage, parallel	0.3 / -	%	ISO 294-4, 2577
Moulding shrinkage, normal	1.1 / -	%	ISO 294-4, 2577

Typical mechanical properties

	dry/cond.		
Tensile Modulus	10000 / 7000	MPa	ISO 527-1/-2
Stress at break, 5mm/min	190 / 130	MPa	ISO 527-1/-2
Strain at break, 5mm/min	3.5 / 5	%	ISO 527-1/-2
Charpy impact strength, 23°C	70 / 80	kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	60 / -	kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	12 / 15	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	10 / 10	kJ/m ²	ISO 179/1eA
Izod notched impact strength, 23°C	12 / 14	kJ/m ²	ISO 180/1A
Poisson's ratio	0.34 / 0.35		

Thermal properties

	dry/cond.		
Melting temperature, 10°C/min	262 / *	°C	ISO 11357-1/-3
Glass transition temperature, 10°C/min	75 / 20	°C	ISO 11357-1/-3
Temp. of deflection under load, 1.8 MPa	250 / *	°C	ISO 75-1/-2
Temp. of deflection under load, 0.45 MPa	260 / *	°C	ISO 75-1/-2
Coeff. of linear therm. expansion, parallel	28 / *	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	95 / *	E-6/K	ISO 11359-1/-2



Zytel® 70G30L NC010

NYLON RESIN

Thermal conductivity of melt	0.21	W/(m K)	Internal
Eff. thermal diffusivity	6.85E-8	m ² /s	Internal
Spec. heat capacity of melt	2290	J/(kg K)	Internal
RTI, electrical, 0.75mm	130	°C	UL 746B
RTI, electrical, 1.5mm	130	°C	UL 746B
RTI, electrical, 3mm	130	°C	UL 746B
RTI, impact, 0.75mm	120	°C	UL 746B
RTI, impact, 1.5mm	120	°C	UL 746B
RTI, impact, 3mm	120	°C	UL 746B
RTI, strength, 0.75mm	130	°C	UL 746B
RTI, strength, 1.5mm	130/*	°C	UL 746B
RTI, strength, 3mm	130	°C	UL 746B

Flammability

	dry/cond.		
Burning Behav. at 1.5mm nom. thickn.	HB/*	class	UL 94
Thickness tested	1.5/*	mm	UL 94
UL recognition	yes/*		UL 94
Burning Behav. at thickness h	HB/*	class	UL 94
Thickness tested	0.71/*	mm	UL 94
UL recognition	yes/*		UL 94
Oxygen index	24/*	%	ISO 4589-1/-2
FMVSS Class	SE/B		ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	24	mm/min	ISO 3795 (FMVSS 302)

Electrical properties

	dry/cond.		
Dissipation factor, 100Hz	160/-	E-4	IEC 62631-2-1
Dissipation factor, 1MHz	160/-	E-4	IEC 62631-2-1
Volume resistivity	1E11/-	Ohm.m	IEC 62631-3-1
Surface resistivity	*/1E12	Ohm	IEC 62631-3-2
Comparative tracking index	600/-		IEC 60112
Comparative tracking index, 3.0mm	0/-	PLC	UL 746A

Other properties

	dry/cond.		
Humidity absorption, 2mm	2/*	%	Sim. to ISO 62
Water absorption, 2mm	6.9/*	%	Sim. to ISO 62
Density	1370/-	kg/m ³	ISO 1183
Density of melt	1210	kg/m ³	Internal

VDA Properties

	dry/cond.		
Emission of organic compounds	6	µgC/g	VDA 277
Thermal desorption analysis of organic emissions	5	µg/g	VDA 278
Odour	4.5	class	VDA 270
Fogging, F-value (refraction)	95/*	%	ISO 6452
Fogging, G-value (condensate)	0.3/*	mg	ISO 6452



Zytel® 70G30L NC010

NYLON RESIN

Injection

Drying Recommended	yes	
Drying Temperature	80 °C	
Drying Time, Dehumidified Dryer	2 - 4 h	
Processing Moisture Content	≤0.2 %	
Melt Temperature Optimum	295 °C	Internal
Min. melt temperature	285 °C	
Max. melt temperature	305 °C	
Screw tangential speed	≤0.2 m/s	
Mold Temperature Optimum	100 °C	
Min. mould temperature	70 °C	
Max. mould temperature	120 °C	
Hold pressure range	50 - 100 MPa	
Hold pressure time	3 s/mm	

Characteristics


Additives	Release agent
-----------	---------------



Zytel® 70G30L NC010

NYLON RESIN


Stress-strain (dry)

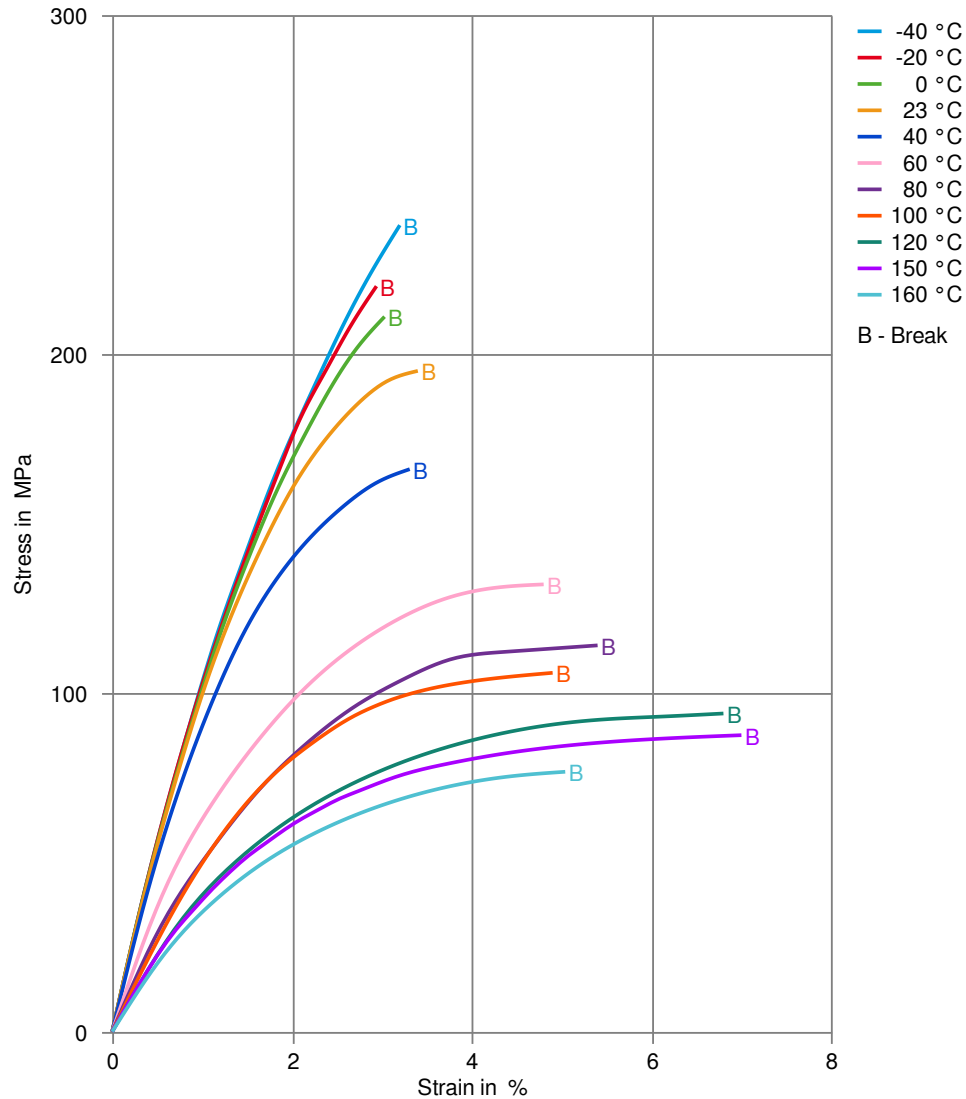

Zytel® 70G30L NC010

NYLON RESIN


Stress-strain (cond.)

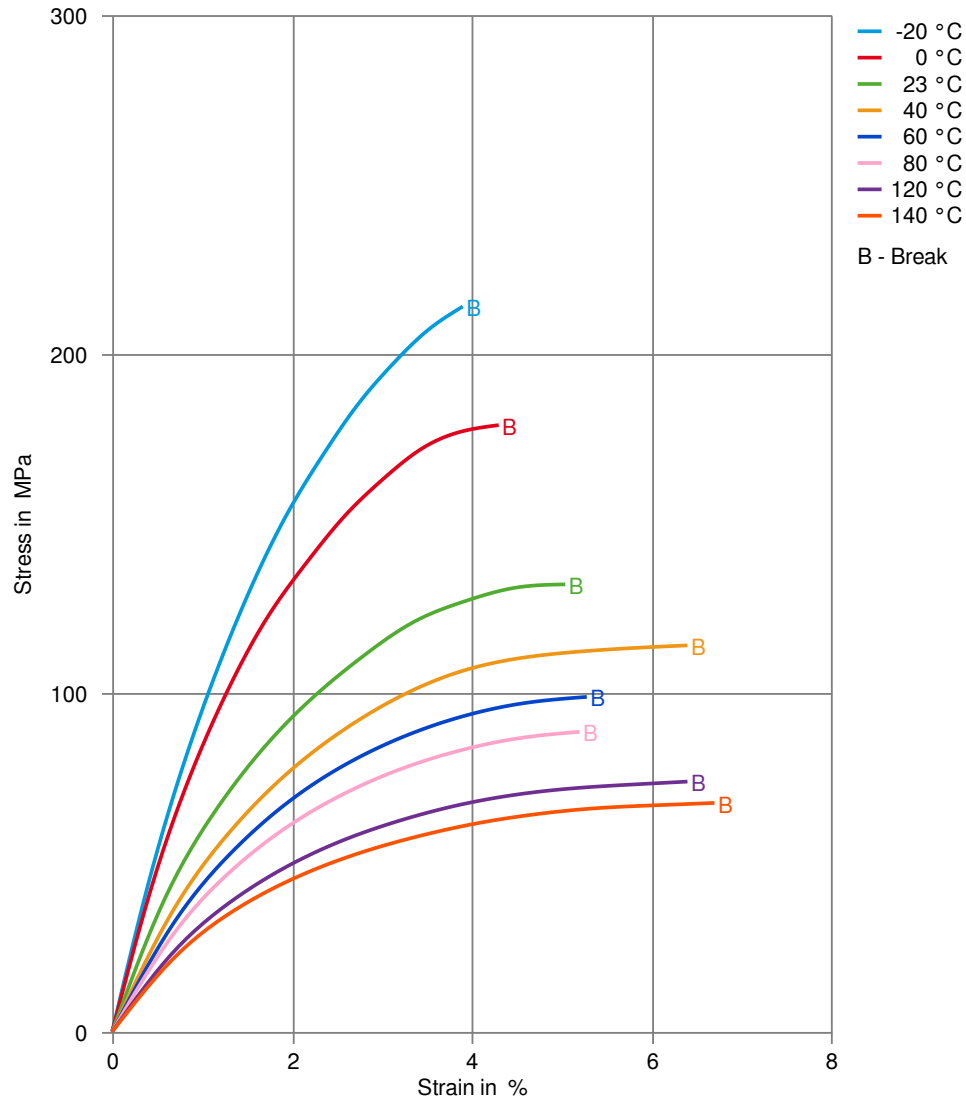

Zytel® 70G30L NC010

NYLON RESIN


Secant modulus-strain (dry)

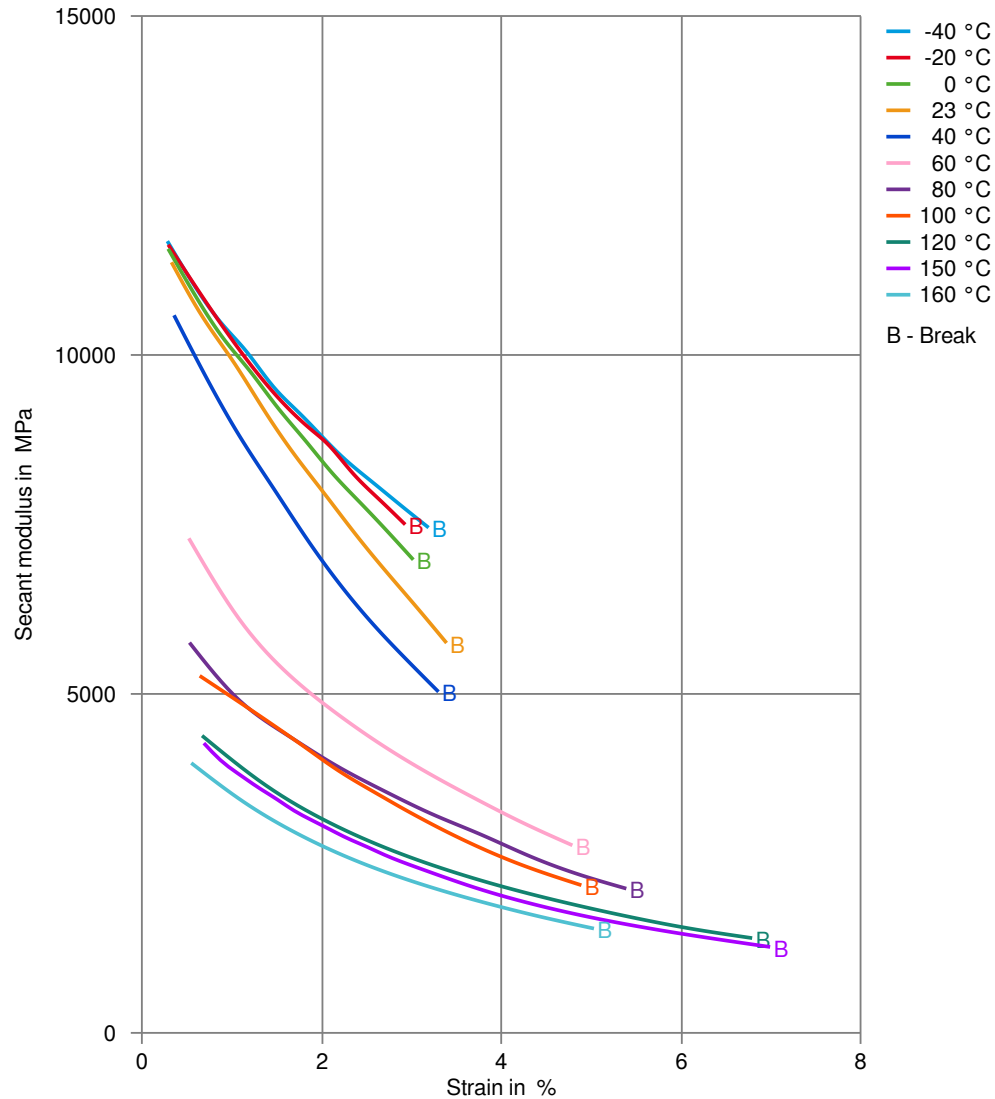

Zytel® 70G30L NC010

NYLON RESIN


Secant modulus-strain (cond.)

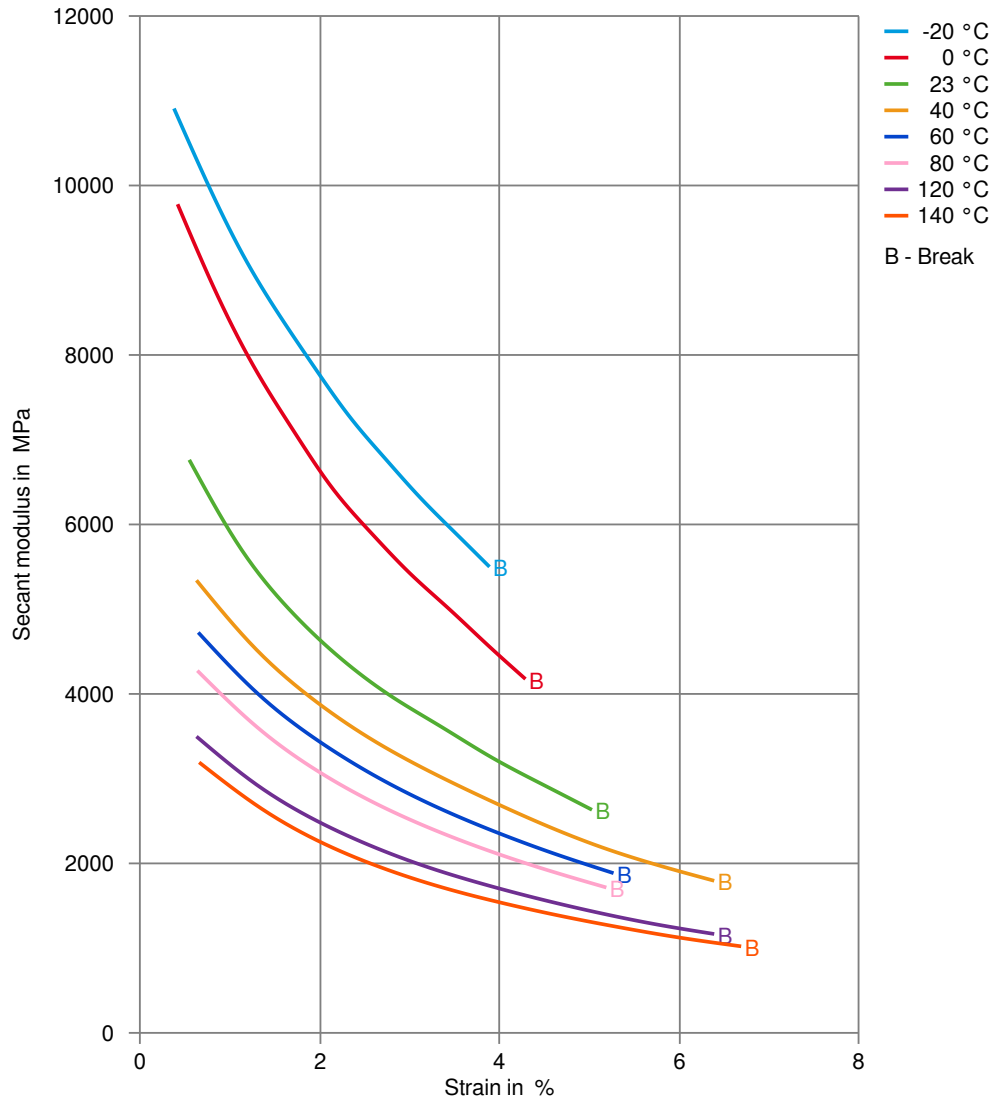

Zytel® 70G30L NC010

NYLON RESIN

Specific volume-temperature (pvT)

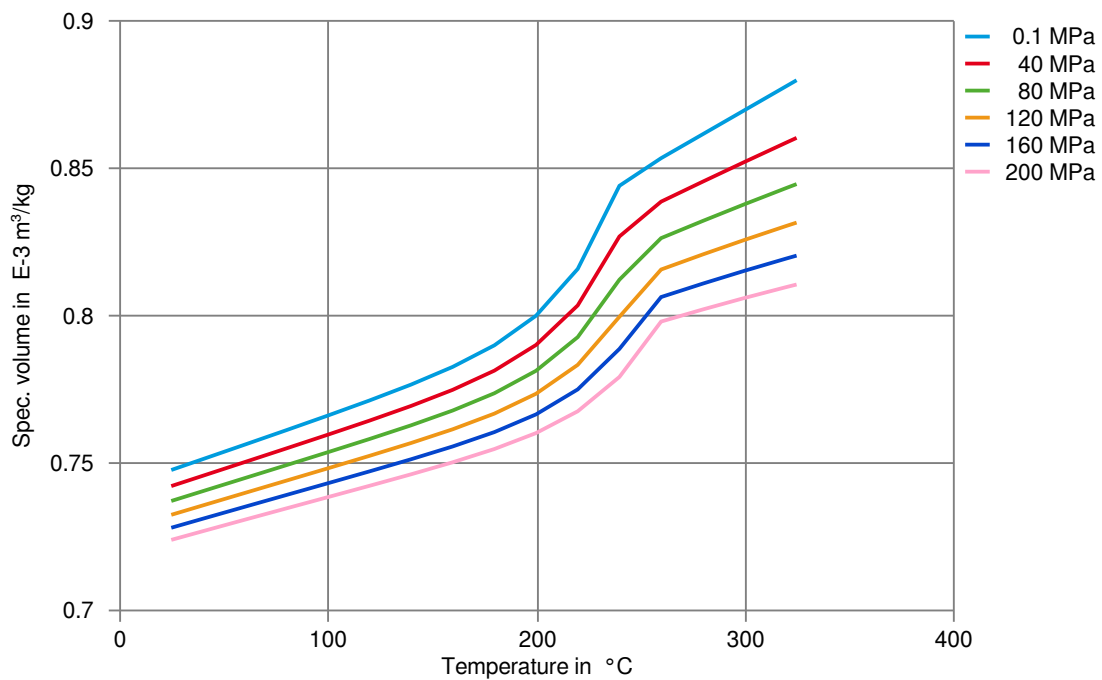

Zytel® 70G30L NC010

NYLON RESIN

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass), 23 °C
- ✓ Citric Acid solution (10% by mass), 23 °C
- ✓ Lactic Acid (10% by mass), 23 °C
- ✗ Hydrochloric Acid (36% by mass), 23 °C
- ✗ Nitric Acid (40% by mass), 23 °C
- ✗ Sulfuric Acid (38% by mass), 23 °C
- ✗ Sulfuric Acid (5% by mass), 23 °C
- ✗ Chromic Acid solution (40% by mass), 23 °C

Bases

- ✗ Sodium Hydroxide solution (35% by mass), 23 °C
- ✓ Sodium Hydroxide solution (1% by mass), 23 °C
- ✓ Ammonium Hydroxide solution (10% by mass), 23 °C

Alcohols

- ✓ Isopropyl alcohol, 23 °C
- ✓ Methanol, 23 °C
- ✓ Ethanol, 23 °C

Hydrocarbons

- ✓ n-Hexane, 23 °C
- ✓ Toluene, 23 °C
- ✓ iso-Octane, 23 °C

Ketones

- ✓ Acetone, 23 °C

Ethers

- ✓ Diethyl ether, 23 °C

Mineral oils

- ✓ SAE 10W40 multigrade motor oil, 23 °C
- ✓ SAE 10W40 multigrade motor oil, 130 °C
- ✓ SAE 80/90 hypoid-gear oil, 130 °C
- ✓ Insulating Oil, 23 °C

Standard Fuels

- ✓ ISO 1817 Liquid 1 - E5, 60 °C
- ✓ ISO 1817 Liquid 2 - M15E4, 60 °C
- ✓ ISO 1817 Liquid 3 - M3E7, 60 °C
- ✓ ISO 1817 Liquid 4 - M15, 60 °C
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C), 23 °C
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4), 23 °C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 23 °C
- ✗ Diesel fuel (pref. ISO 1817 Liquid F), 90 °C
- ✗ Diesel fuel (pref. ISO 1817 Liquid F), >90 °C



Zytel® 70G30L NC010

NYLON RESIN

Salt solutions

- ✓ Sodium Chloride solution (10% by mass), 23°C
- ✗ Sodium Hypochlorite solution (10% by mass), 23°C
- ✓ Sodium Carbonate solution (20% by mass), 23°C
- ✓ Sodium Carbonate solution (2% by mass), 23°C
- ✗ Zinc Chloride solution (50% by mass), 23°C

Other

- ✓ Ethyl Acetate, 23°C
- ✗ Hydrogen peroxide, 23°C
- ✓ DOT No. 4 Brake fluid, 130°C
- ✓ Ethylene Glycol (50% by mass) in water, 108°C
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water, 23°C
- ✓ 50% Oleic acid + 50% Olive Oil, 23°C
- ✓ Water, 23°C
- ✓ Water, 90°C
- ✗ Phenol solution (5% by mass), 23°C
- ✗ Coolant Glysantin G48, 1:1 in water, 125°C

Symbols used:

- ✓ possibly resistant
Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).
- ✗ not recommended - see explanation
Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).

