

CELANEX® 3200-2

15% glass-fiber reinforced, lubricated, high flow grade

Celanex 3200-2 is a general purpose, 15% glass reinforced polybutylene terephthalate with a good balance of mechanical properties and processability. Celanex 3200-2 contains an internal lubricant.

Product information

Part Marking Code	> PBT-GF15 <	ISO 11469
-------------------	--------------	-----------

Rheological properties

Melt volume-flow rate	26 cm ³ /10min	ISO 1133
Temperature	250 °C	
Load	2.16 kg	
Moulding shrinkage range, parallel	0.5 - 0.7 %	ISO 294-4, 2577
Moulding shrinkage range, normal	0.9 - 1.1 %	ISO 294-4, 2577

Typical mechanical properties

Tensile Modulus	5800 MPa	ISO 527-1/-2
Stress at break, 5mm/min	100 MPa	ISO 527-1/-2
Strain at break, 5mm/min	3.5 %	ISO 527-1/-2
Flexural Modulus	5200 MPa	ISO 178
Flexural Strength	150 MPa	ISO 178
Charpy impact strength, 23°C	20 kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	20 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	5.5 kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	5 kJ/m ²	ISO 179/1eA
Izod notched impact strength, 23°C	5 kJ/m ²	ISO 180/1A
Hardness, Rockwell, M-scale	90	ISO 2039-2

Thermal properties

Melting temperature, 10°C/min	225 °C	ISO 11357-1/-3
Glass transition temperature, 10°C/min	60 °C	ISO 11357-1/-3
Temp. of deflection under load, 1.8 MPa	195 °C	ISO 75-1/-2
Temp. of deflection under load, 0.45 MPa	215 °C	ISO 75-1/-2
Temp. of deflection under load, 8 MPa	90 °C	ISO 75-1/-2
Vicat softening temperature, 50°C/h, 50N	215 °C	ISO 306
Coeff. of linear therm. expansion, parallel	40 E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	110 E-6/K	ISO 11359-1/-2

Flammability

Burning Behav. at thickness h	HB class	UL 94
Thickness tested	0.71 mm	UL 94
Oxygen index	20 %	ISO 4589-1/-2



CELANEX® 3200-2

Electrical properties

Relative permittivity, 100Hz	4.2	IEC 62631-2-1
Relative permittivity, 1MHz	3.8	IEC 62631-2-1
Dissipation factor, 100Hz	16 E-4	IEC 62631-2-1
Dissipation factor, 1MHz	200 E-4	IEC 62631-2-1
Volume resistivity	>1E13 Ohm.m	IEC 62631-3-1
Surface resistivity	>1E15 Ohm	IEC 62631-3-2
Electric strength	29 kV/mm	IEC 60243-1
Comparative tracking index	PLC 2 PLC	UL 746A

Other properties

Humidity absorption, 2mm	0.2 %	Sim. to ISO 62
Water absorption, 2mm	0.45 %	Sim. to ISO 62
Density	1410 kg/m³	ISO 1183

Injection

Drying Temperature	120 - 130 °C	
Drying Time, Dehumidified Dryer	4 h	
Processing Moisture Content	0.02 %	
Melt Temperature Optimum	250 °C	Internal
Max. mould temperature	65 - 93 °C	
Injection speed	medium-fast	

Characteristics

Additives	Release agent
-----------	---------------

Additional information


Injection molding	Rear Temperature 450-470(230-240) deg F (deg C)
	Center Temperature 460-480(235-250) deg F (deg C)
	Front Temperature 470-500(240-260) deg F (deg C)
	Nozzle Temperature 480-500(250-260) deg F (deg C)
	Melt Temperature 460-500(235-260) deg F (deg C)
	Mold Temperature 150-200(65-93) deg F (deg C)
	Back Pressure 0-50 psi
	Screw Speed Medium
	Injection Speed Fast

Injection speed, injection pressure and holding pressure have to be optimized to the individual article geometry. To avoid material degradation during processing low back pressure and minimum screw speed have to be used. Overheating of the material has to be avoided, in particular for flame retardant grades. Up to 25% clean and dry regrind may be used.




CELANEX® 3200-2

Stress-strain

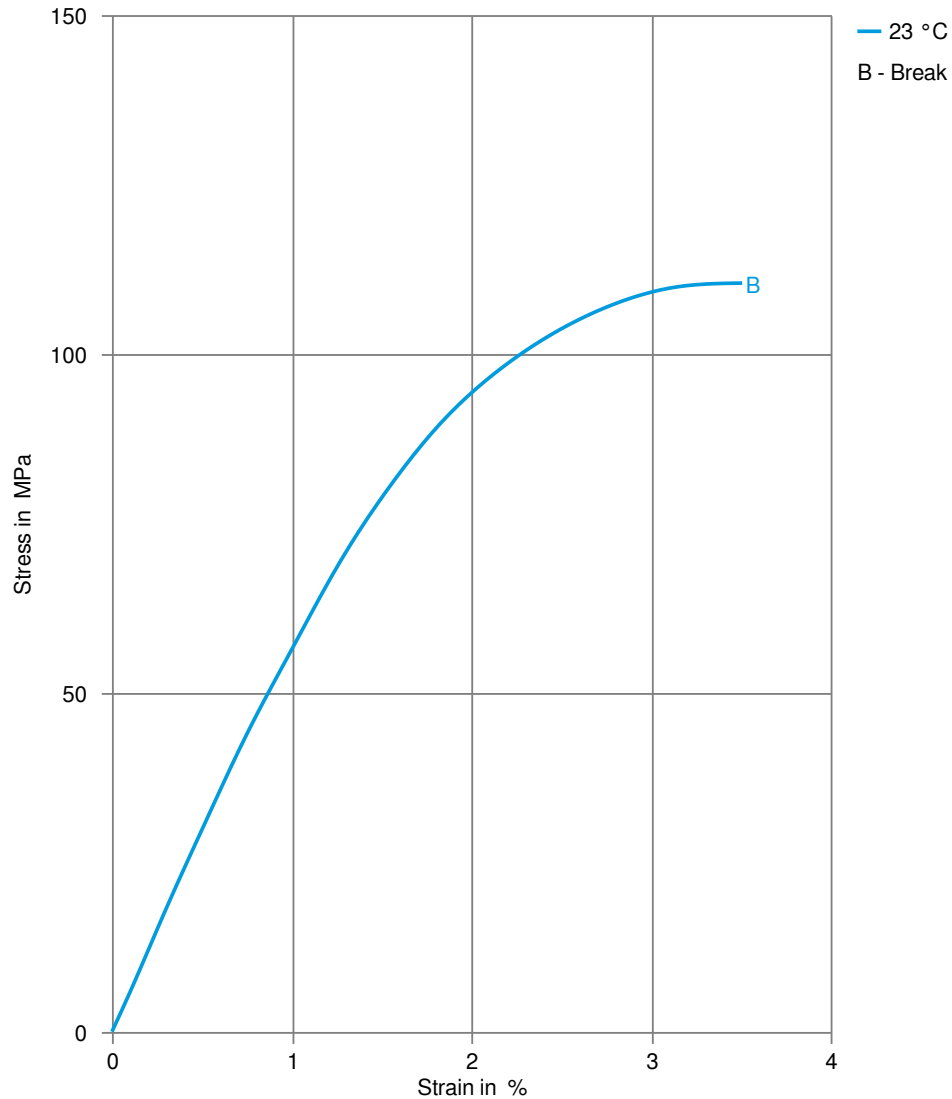

CELANEX® 3200-2

Secant modulus-strain

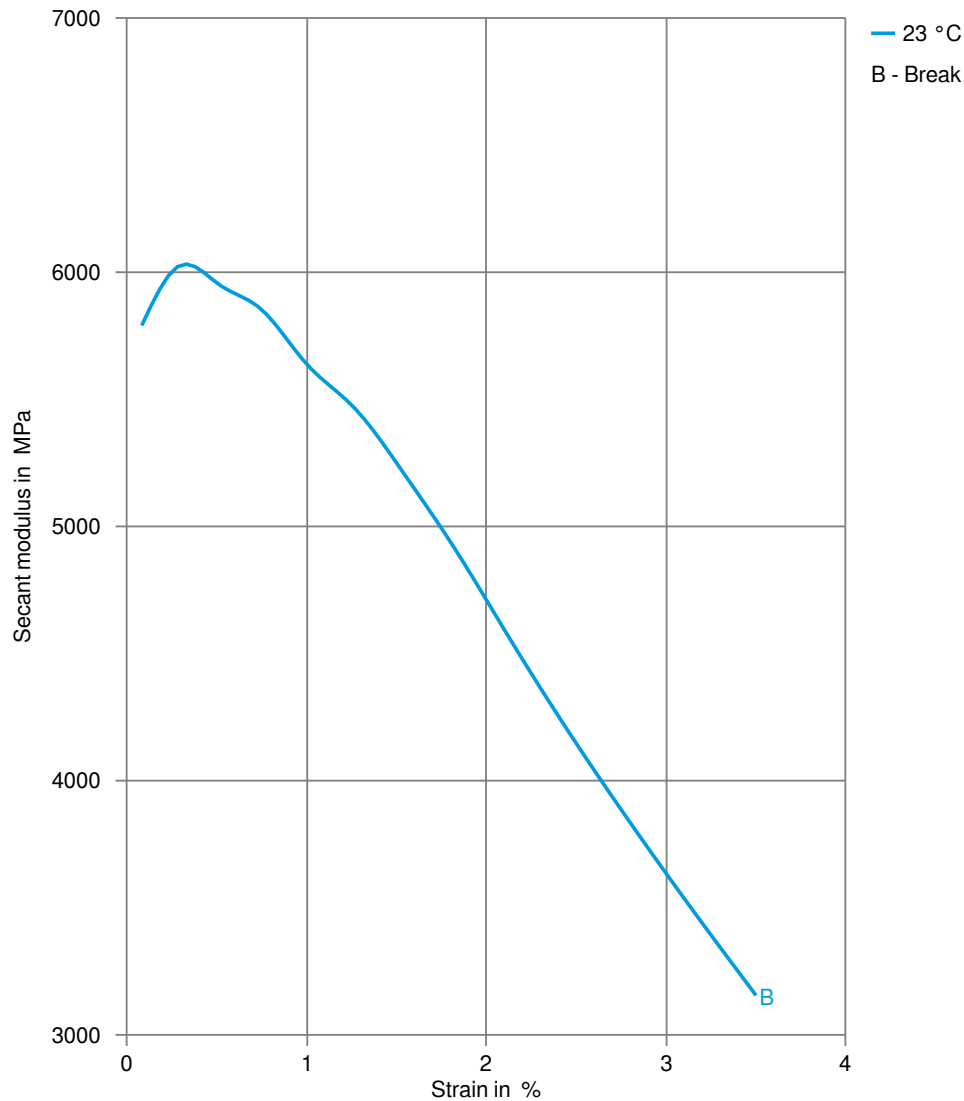

CELANEX® 3200-2

Processing Texts

Pre-drying

To avoid hydrolytic degradation during processing, CELANEX resins have to be dried to a moisture level equal to or less than 0.02%. Drying should be done in a dehumidifying hopper dryer capable of dewpoints <-40°F (-40°C) at 250°F (121°C) for 4 hours.

Longer pre-drying times/storage

For subsequent storage of the material in the dryer until processed (<= 60 h) it is necessary to lower the temperature to 100° C.

Injection molding

Rear Temperature 450-470(230-240) deg F (deg C)
 Center Temperature 460-480(235-250) deg F (deg C)
 Front Temperature 470-500(240-260) deg F (deg C)
 Nozzle Temperature 480-500(250-260) deg F (deg C)
 Melt Temperature 460-500(235-260) deg F (deg C)
 Mold Temperature 150-200(65-93) deg F (deg C)
 Back Pressure 0-50 psi
 Screw Speed Medium
 Injection Speed Fast

Injection speed, injection pressure and holding pressure have to be optimized to the individual article geometry. To avoid material degradation during processing low back pressure and minimum screw speed have to be used. Overheating of the material has to be avoided, in particular for flame retardant grades. Up to 25% clean and dry regrind may be used.

Injection molding Preprocessing

To avoid hydrolytic degradation during processing, CELANEX resins have to be dried to a moisture level equal to or less than 0.02%. Drying should be done in a dehumidifying hopper dryer capable of dewpoints <-30°F (-34°C) at 250°F (121°C) for 4 hours.

Other Approvals

Other Approvals

OEM	Specification	Additional Information
Stellantis - Chrysler	CPN 2425	Black
Continental	SN 57908-6	
Ford	WSK-M4D750-A	Natural & Black
Li Auto	Q/LiA5310038	2021 (V2)
Toyota	TSM5604G-1A	

