

HOSTAFORM® C 9021 10/1570

General purpose injection molding grade; UV-stabilized with carbon black

Chemical abbreviation according to ISO 1043-1: POM Molding compound ISO 29988- POM-K, M-GCL, 03-002 POM copolymer Standard Injection molding type, UV-stabilized with carbon black; good chemical resistance to solvents, fuel and strong alkalis as well as good hydrolysis resistance; high resistance to thermal and oxidative degradation. UL-registration for a thickness more than 1.5 mm as UL 94 HB, temperature index UL 746 B electrical 110 °C, mechanical 90 °C. Burning rate ISO 3795 and FMVSS 302 < 100 mm/min for a thickness more than 1 mm. Ranges of applications: exterior applications. UL = Underwriters Laboratories (USA) FMVSS = Federal Motor Vehicle Safety Standard (USA)

Product information

Part Marking Code	POM	ISO 11469
-------------------	-----	-----------

Rheological properties

Melt volume-flow rate	8 cm ³ /10min	ISO 1133
Temperature	190 °C	
Load	2.16 kg	
Moulding shrinkage range, parallel	2.0 %	ISO 294-4, 2577
Moulding shrinkage range, normal	1.8 %	ISO 294-4, 2577

Typical mechanical properties

Tensile Modulus	3000 MPa	ISO 527-1/-2
Yield stress, 50mm/min	64 MPa	ISO 527-1/-2
Yield strain, 50mm/min	8 %	ISO 527-1/-2
Nominal strain at break	25 %	ISO 527-1/-2
Tensile creep modulus, 1h	2500 MPa	ISO 899-1
Tensile creep modulus, 1000h	1400 MPa	ISO 899-1
Charpy impact strength, 23°C	110 kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	110 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	6.5 kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	6 kJ/m ²	ISO 179/1eA

Thermal properties

Melting temperature, 10°C/min	167 °C	ISO 11357-1/-3
Temp. of deflection under load, 1.8 MPa	105 °C	ISO 75-1/-2
Vicat softening temperature, 50°C/h, 50N	150 °C	ISO 306
Coeff. of linear therm. expansion, parallel	110 E-6/K	ISO 11359-1/-2

Flammability

Burning Behav. at 1.5mm nom. thickn.	HB class	UL 94
Thickness tested	1.5 mm	UL 94
Burning Behav. at thickness h	HB class	UL 94
Thickness tested	3.00 mm	UL 94
UL recognition	yes	UL 94

Printed: 2023-09-15



HOSTAFORM® C 9021 10/1570

Electrical properties

Volume resistivity	1E12 Ohm.m	IEC 62631-3-1
Surface resistivity	1E14 Ohm	IEC 62631-3-2
Electric strength	28 kV/mm	IEC 60243-1
Comparative tracking index	PLC 2 PLC	UL 746A

Other properties

Humidity absorption, 2mm	0.2 %	Sim. to ISO 62
Water absorption, 2mm	0.65 %	Sim. to ISO 62
Density	1420 kg/m ³	ISO 1183

Injection

Drying Temperature	100 - 120 °C
Drying Time, Dehumidified Dryer	3 - 4 h

Characteristics

Additives	Release agent
-----------	---------------


Additional information

Injection molding	Standard injection moulding machines with three phase (15 to 25 D) plasticating screws will fit.
-------------------	--



HOSTAFORM® C 9021 10/1570

True stress-strain

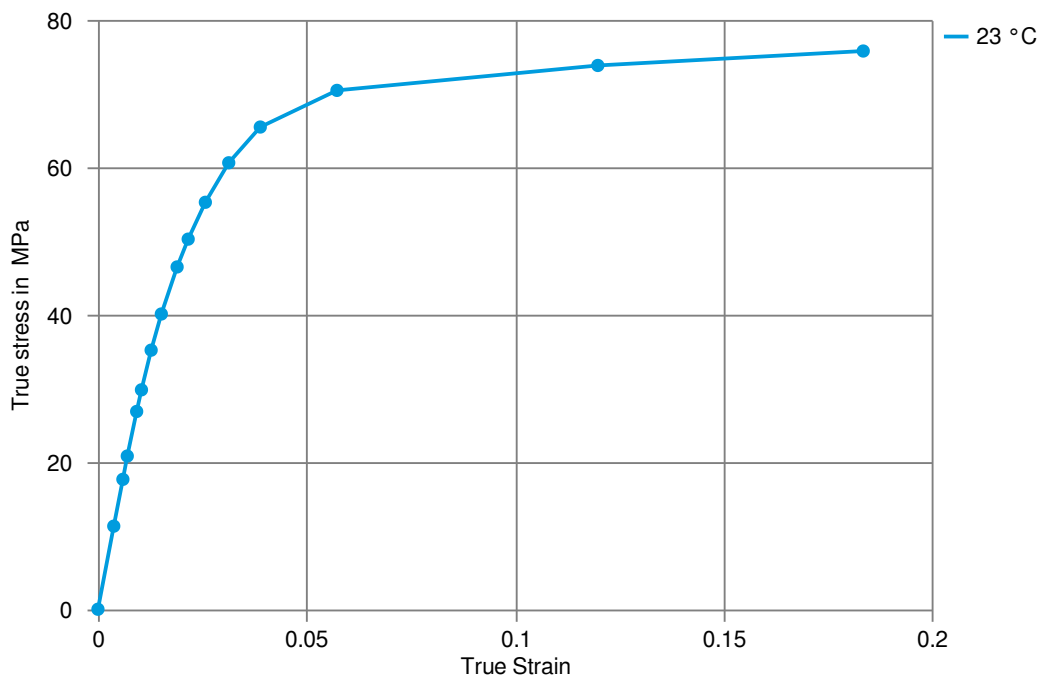

HOSTAFORM® C 9021 10/1570

Processing Texts

Injection molding	Standard injection moulding machines with three phase (15 to 25 D) plasticating screws will fit.
Injection molding Preprocessing	General drying is not necessary due to low moisture absorption of the resin. In case of bad storage conditions (water contact or condensed water) the use of a recirculating air dryer (100 to 120 °C / max. 40 mm layer / 3 to 6 hours) is recommended. Max. Water content 0,2 %
Injection molding Postprocessing	Conditioning e.g. moisturizing is not necessary.

Other Approvals

Other Approvals

OEM	Specification
Stellantis - PSA Group	01994_14_00056

Printed: 2023-09-15

