

Diamond Asa TW18B2

Acrylonitrile Styrene Acrylate

LyondellBasell Industries

Engineering Plastics

General			
Features	• Good Weather Resistance	• High Heat Resistance	
Agency Ratings	• EC 1907/2006 (REACH)	• EU 2002/96/EC (WEEE)	
RoHS Compliance	• RoHS Compliant		
Forms	• Pellets		
Processing Method	• Injection Molding		

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	1.12	1.12 g/cm ³	ASTM D792
Melt Mass-Flow Rate (MFR) ¹			ASTM D1238
200°C/5.0 Kg	0.30 g/10 min	0.30 g/10 min	
220°C/10.0 Kg	4.1 g/10 min	4.1 g/10 min	
230°C/3.8 Kg	1.3 g/10 min	1.3 g/10 min	

Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength ² (Yield)	7080 psi	48.8 MPa	ASTM D638
Flexural Modulus - Tangent ³	353000 psi	2430 MPa	ASTM D790

Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact			ASTM D256
73°F (23°C), 0.125 In (3.18 Mm)	1.6 ft·lb/in	85 J/m	


Hardness	Nominal Value (English)	Nominal Value (SI)	Test Method
Rockwell Hardness (R-scale)	102	102	ASTM D785

Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			ASTM D648
264 Psi (1.8 Mpa), Unannealed, 0.125 In (3.18 Mm)	205 °F	96.1 °C	
264 Psi (1.8 Mpa), Unannealed, 0.250 In (6.35 Mm)	230 °F	110 °C	
Vicat Softening Temperature	264 °F	129 °C	ASTM D1525 ⁴



Diamond Asa TW18B2

Acrylonitrile Styrene Acrylate
LyondellBasell Industries
Engineering Plastics

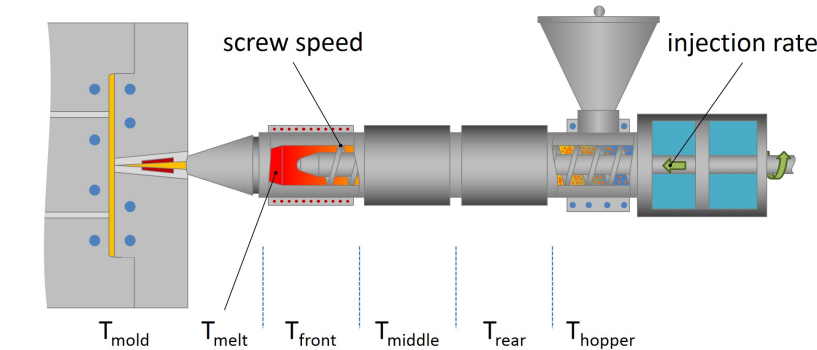

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	176 to 185 °F	80 to 85 °C
Drying Time	2.0 to 4.0 hr	2.0 to 4.0 hr
Suggested Max Moisture	0.10 %	0.10 %
Suggested Shot Size	40 to 70 %	40 to 70 %
Rear Temperature	446 to 500 °F	230 to 260 °C
Middle Temperature	450 to 509 °F	232 to 265 °C
Front Temperature	455 to 522 °F	235 to 272 °C
Nozzle Temperature	428 to 522 °F	220 to 272 °C
Processing (Melt) Temp	428 to 522 °F	220 to 272 °C
Mold Temperature	104 to 176 °F	40 to 80 °C
Injection Rate	Fast	Fast
Back Pressure	75.0 to 150 psi	0.517 to 1.03 MPa

Notes

- ¹ Procedure A
- ² 2.0 in/min (51 mm/min)
- ³ 0.050 in/min (1.3 mm/min)
- ⁴ Loading 1 (10 N)

Notes

These are typical property values not to be construed as specification limits.

