

Matrixx FP64E33

Polyamide 6
LyondellBasell Industries
Engineering Plastics

Product Description

33% REINFORCED NYLON, IMPACT MODIFIED

General

Filler / Reinforcement	• Glass Fiber, 33% Filler by Weight
Features	• Impact Modified
Forms	• Pellets
Processing Method	• Injection Molding

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	1.38	1.38 g/cm ³	ASTM D792
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength (Break)	22000 psi	152 MPa	ASTM D638
Flexural Modulus - Tangent	1.20E+6 psi	8270 MPa	ASTM D790
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact	3.0 ft·lb/in	160 J/m	ASTM D256
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			ASTM D648
66 Psi (0.45 Mpa), Unannealed	410 °F	210 °C	
264 Psi (1.8 Mpa), Unannealed	390 °F	199 °C	

Additional Information


1EA11A/PR2661

Revision: 5/2/2020



Matrixx FP64E33

Polyamide 6
LyondellBasell Industries
Engineering Plastics

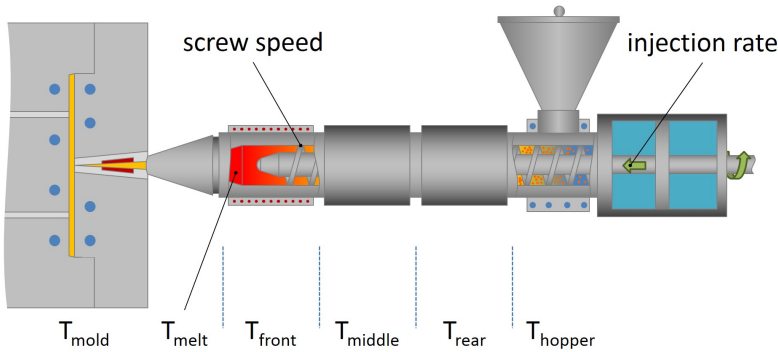

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	160 to 200 °F	71 to 93 °C
Drying Time	4.0 to 6.0 hr	4.0 to 6.0 hr
Suggested Max Moisture	0.10 %	0.10 %
Rear Temperature	480 to 540 °F	249 to 282 °C
Middle Temperature	500 to 540 °F	260 to 282 °C
Front Temperature	500 to 540 °F	260 to 282 °C
Processing (Melt) Temp	480 to 540 °F	249 to 282 °C
Mold Temperature	180 to 200 °F	82 to 93 °C
Injection Rate	Moderate-Fast	Moderate-Fast
Back Pressure	< 50.0 psi	< 0.345 MPa
Cushion	0.250 to 0.500 in	6.35 to 12.7 mm

Injection Notes

Dessicant dryer with -20°F dewpoint
Screw Speed: Slow to Medium

Notes

These are typical property values not to be construed as specification limits.

