

Circulen Recover EP PA66 GB30 H BLACK

Polyamide 66
LyondellBasell Industries
Engineering Plastics

Product Description

30% glass bead reinforced, heat stabilized Polyamide 6 formulated on mechanical recycled sourcing. The product is available in black color, pellet form. Sustainability:

According with the requirements of Standard ISO 14021:2016, Circulen Recover EP PA66 GB30 H BLACK contains 65% of recycled material that is fully based on Post-Industrial Waste (PIW).

General

Filler / Reinforcement	• Glass Bead, 30% Filler by Weight
Recycled Content	• Yes, 65%
Features	• Heat Stabilized • Medium Viscosity
Processing Method	• Injection Molding
Resin ID (ISO 1043)	• PA66 GB30

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density	1.35 g/cm ³	1.35 g/cm ³	ISO 1183/A
Viscosity Number	145 cm ³ /g	145 cm ³ /g	ISO 307
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Modulus	653000 psi	4500 MPa	ISO 527-1/1A/1
Tensile Stress (Break)	11600 psi	80.0 MPa	ISO 527-2/1A/5
Tensile Strain (Break)	7.0 %	7.0 %	ISO 527-2/1A/5
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Charpy Notched Impact Strength			ISO 179/1eA
-22°F (-30°C)	1.4 ft·lb/in ²	3.0 kJ/m ²	
73°F (23°C)	1.9 ft·lb/in ²	4.0 kJ/m ²	
Charpy Unnotched Impact Strength			ISO 179/1eU
-22°F (-30°C)	12 ft·lb/in ²	25 kJ/m ²	
73°F (23°C)	14 ft·lb/in ²	30 kJ/m ²	
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			
66 Psi (0.45 Mpa), Unannealed	356 °F	180 °C	ISO 75-2/Bf
264 Psi (1.8 Mpa), Unannealed	167 °F	75.0 °C	ISO 75-2/Af


Additional Information

The tradename "Schulamid" may be abbreviated "SAM" in documents or on labels, "Recover" may be abbreviated "RC".



Circulen Recover EP PA66 GB30 H BLACK

Polyamide 66
LyondellBasell Industries
Engineering Plastics

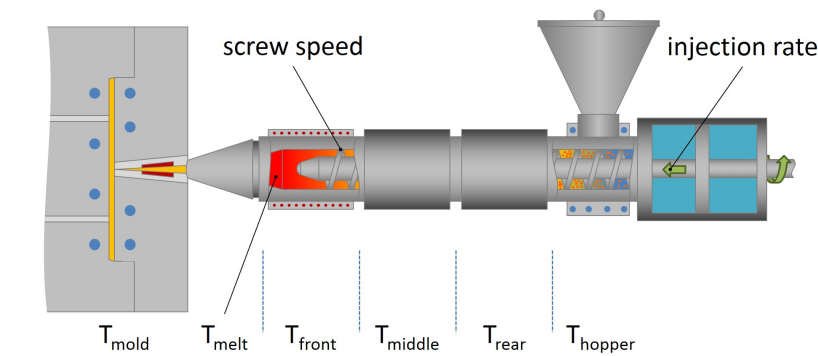

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	176 °F	80 °C
Drying Time	3.0 to 4.0 hr	3.0 to 4.0 hr
Suggested Max Moisture	0.04 to 0.10 %	0.04 to 0.10 %
Processing (Melt) Temp	536 to 572 °F	280 to 300 °C
Mold Temperature	140 to 248 °F	60 to 120 °C

Notes

These are typical property values not to be construed as specification limits.

