

SCHULAFORM[®] 9 A

Acetal (POM) Copolymer
Engineering Plastics

Product Description

Standard POM

General

Automotive Specifications	• GM GMW22P-POM-C2 Color: Natural
UL File Number	• E86615
Processing Method	• Injection Molding
Resin ID (ISO 1043)	• POM

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density	1.41 g/cm ³	1.41 g/cm ³	ISO 1183/A
Melt Mass-Flow Rate (MFR)	9.0 g/10 min	9.0 g/10 min	ISO 1133
Melt Volume-Flow Rate (MVR) (190°C/2.16 kg)	8.50 cm ³ /10min	8.50 cm ³ /10min	ISO 1133
Molding Shrinkage	1.5 to 2.5 %	1.5 to 2.5 %	ISO 294-4
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Modulus	387000 psi	2670 MPa	ISO 527-2/1A/1
Tensile Stress (Yield)	9140 psi	63.0 MPa	ISO 527-2/1A/50
Tensile Strain (Yield)	10 %	10 %	ISO 527-2/1A/50
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Charpy Notched Impact Strength			ISO 179/1eA
-22°F (-30°C)	3.8 ft·lb/in ²	8.0 kJ/m ²	
73°F (23°C)	4.3 ft·lb/in ²	9.0 kJ/m ²	
Charpy Unnotched Impact Strength			ISO 179/1eU
-22°F (-30°C)	No Break	No Break	
73°F (23°C)	No Break	No Break	
Hardness	Nominal Value (English)	Nominal Value (SI)	Test Method
Ball Indentation Hardness (H 358/30)	21300 psi	147 MPa	ISO 2039-1
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Heat Deflection Temperature			
66 psi (0.45 MPa), Unannealed	306 °F	152 °C	ISO 75-2/Bf
264 psi (1.8 MPa), Unannealed	208 °F	98.0 °C	ISO 75-2/Af
Vicat Softening Temperature			
--	324 °F	162 °C	ISO 306/A50
--	295 °F	146 °C	ISO 306/B50
RTI Elec (0.06 in (1.5 mm))	122 °F	50.0 °C	UL 746
RTI Imp (0.06 in (1.5 mm))	122 °F	50.0 °C	UL 746
RTI Str (0.06 in (1.5 mm))	122 °F	50.0 °C	UL 746
Electrical	Nominal Value (English)	Nominal Value (SI)	Test Method
Surface Resistivity	> 1.0E+15 ohms	> 1.0E+15 ohms	IEC 60093
Volume Resistivity	> 1.0E+13 ohms·m	> 1.0E+13 ohms·m	IEC 62631-3-1
Comparative Tracking Index	600 V	600 V	IEC 60112



SCHULAFORM® 9 A


Acetal (POM) Copolymer
Engineering Plastics

Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Burning Rate			
0.0787 in (2.00 mm)	2.1 in/min	54 mm/min	ISO 3795
0.0787 in (2.00 mm)	2.1 in/min	54 mm/min	FMVSS 302
Flammability Classification			IEC 60695-11-10, -20
0.06 in (1.5 mm)	HB	HB	
0.12 in (3.0 mm)	HB	HB	
Glow Wire Flammability Index			IEC 60695-2-12
0.06 in (1.5 mm)	1200 °F	650 °C	
0.12 in (3.0 mm)	1160 °F	625 °C	
Glow Wire Ignition Temperature			IEC 60695-2-13
0.06 in (1.5 mm)	1250 °F	675 °C	
0.12 in (3.0 mm)	1200 °F	650 °C	



SCHULAFORM® 9 A

Acetal (POM) Copolymer
Engineering Plastics

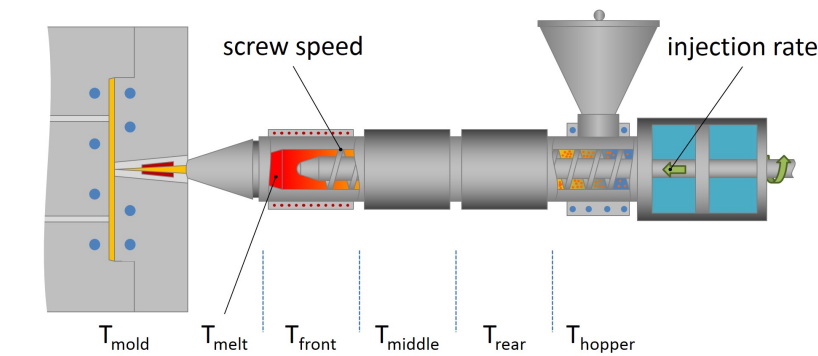

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	212 °F	100 °C
Drying Time	2.0 to 4.0 hr	2.0 to 4.0 hr
Suggested Max Moisture	0.04 to 0.10 %	0.04 to 0.10 %
Suggested Max Regrind	20 %	20 %
Processing (Melt) Temp	374 to 428 °F	190 to 220 °C
Mold Temperature	140 to 248 °F	60 to 120 °C

Notes

These are typical property values not to be construed as specification limits.

