

Ferro Pp TPP40AN90NA

Polypropylene Copolymer

LyondellBasell Industries

Engineering Plastics

General		
Filler / Reinforcement	• Talc, 41% Filler by Weight	
Additive	• Impact Modifier	
Features	• Copolymer	• Impact Modified
Forms	• Pellets	
Processing Method	• Injection Molding	

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	1.23	1.23 g/cm ³	ASTM D792
Melt Mass-Flow Rate (MFR) (230°C/2.16 Kg)	4.2 g/10 min	4.2 g/10 min	ASTM D1238

Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength (73°F (23°C))	3200 psi	22.1 MPa	ASTM D638
Tensile Elongation (Break, 73°F (23°C))	65 %	65 %	ASTM D638
Flexural Modulus			ASTM D790
1% Secant : 73°F (23°C)	275000 psi	1900 MPa	
Tangent : 73°F (23°C)	344000 psi	2370 MPa	
Flexural Strength (73°F (23°C))	5100 psi	35.2 MPa	ASTM D790


Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact (73°F (23°C))	1.8 ft·lb/in	96 J/m	ASTM D256
Unnotched Izod Impact (73°F (23°C))	12 ft·lb/in	640 J/m	ASTM D4812
Gardner Impact (73°F (23°C))	183 in·lb	20.7 J	ASTM D5420

Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			ASTM D648
66 Psi (0.45 Mpa), Unannealed	247 °F	119 °C	
264 Psi (1.8 Mpa), Unannealed	153 °F	67.2 °C	



Ferro Pp TPP40AN90NA

Polypropylene Copolymer
LyondellBasell Industries
Engineering Plastics

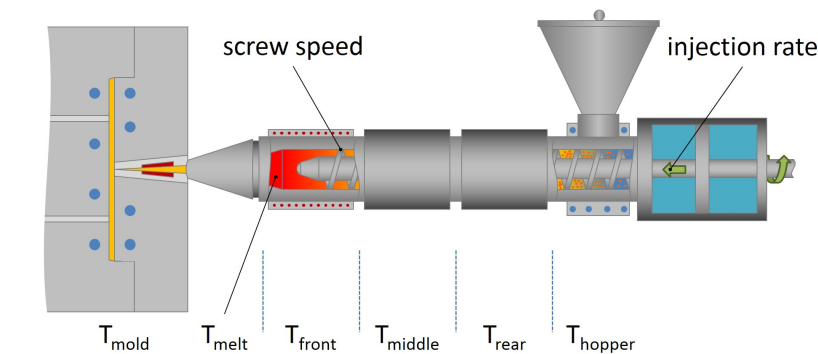

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	176 °F	80 °C
Drying Time	2.0 to 3.0 hr	2.0 to 3.0 hr
Processing (Melt) Temp	428 to 500 °F	220 to 260 °C
Mold Temperature	86 to 140 °F	30 to 60 °C

Notes

These are typical property values not to be construed as specification limits.

