

Product Information

Glass Fiber Reinforced Grade

KOPA[®] KN3 Series

KOPA[®] KN3 Series is a thermoplastic resin NYLON 66 with excellent mechanical, thermal and electrical properties. It finds wide application in the production of automotive, electrical and industrial parts and components. Because it has a long-term heat resistance and excellent mechanical strength, it is suitable for use in internal and external parts.

KOPA[®] KN333G15HI


Impact resistant, Glass fiber 15% reinforced, Polyamide66 Compound resin

Properties		Test Method	Unit	Typical Value
Physical				
Specific Gravity		ISO 1183	-	1.2
Filler Contents		ISO 1172	%	15
Shrinkage		ISO 294	%	
Water Absorption	23°C, H ₂ O, 24hr	ISO 62	%	
Mechanical				
Tensile Strength	23°C	ISO 527	MPa	120
Tensile Elongation	23°C	ISO 527	%	4
Flexural Strength	23°C	ISO 178	MPa	165
Flexural Modulus	23°C	ISO 178	MPa	3,800
Notched Charpy Impact Strength	23°C	ISO 179/1eA	kJ/m ²	9
Rockwell Hardness		ISO 2039-1	R scale	
Thermal				
Melting Point		ISO 11357-1	°C	255
Heat Deflection Temperature		ISO 75	°C	
	0.45 MPa		°C	
	1.8 MPa		°C	240
Flammability(0.8mm)		UL94		

Electrical

Comparative Tracking Index(CTI)	IEC 60112	Volts	
Volume Resistivity	IEC 60093	Ohm-cm	
Surface Resistivity	IEC 60093	Ohm	

Processing Guide (Injection Molding)

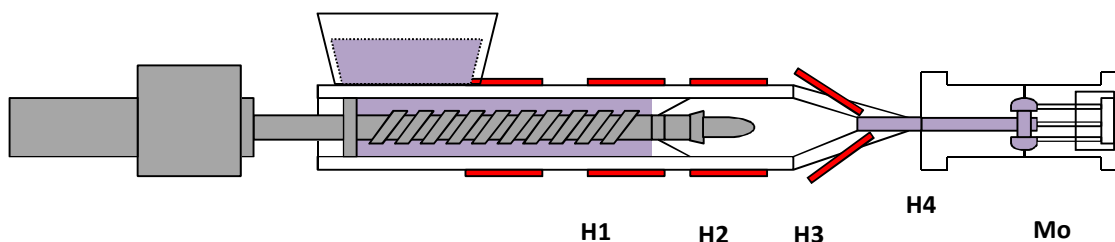

	H1	H2	H3	H4
Cylinder Temperature(°C)	260	275	275	280
Mold Temperature(°C)	60~80			
Processing Moisture Contents(%)	≤0.05			
Pre-drying	Dehumidified Dryer, 80~100°C, 4~5hr			

