

Ultramid® B3EG7
PA6-GF35

BASF

Glass fibre reinforced injection moulding grade for industrial articles and electrical insulating parts.

The products can also be offered as BMBcert™ and/or Ccycled™. Due to the Massbalance approach the product properties do not change.

Rheological properties	dry / cond	Unit	Test Standard
ISO Data			
Melt volume-flow rate, MVR	30 / *	cm³/10min	ISO 1133
Temperature	275 / *	°C	-
Load	5 / *	kg	-

Mechanical Properties	dry / cond	Unit	Test Standard
ISO Data			
Tensile Modulus	11000 / 7200	MPa	ISO 527
Stress at Break	195 / 130	MPa	ISO 527
Strain at Break	3.5 / 7	%	ISO 527
Tensile Creep Modulus, 1h	* / 3900	MPa	ISO 899-1
Tensile Creep Modulus, 1000h	* / 3300	MPa	ISO 899-1
Impact Strength (Charpy), +23°C	100 / 110	kJ/m²	ISO 179/1eU
Impact Strength (Charpy), -30°C	90 / -	kJ/m²	ISO 179/1eU
Notched Impact Strength (Charpy), +23°C	18 / 33	kJ/m²	ISO 179/1eA
Notched Impact Strength (Charpy), -30°C	13 / -	kJ/m²	ISO 179/1eA

Thermal Properties	dry / cond	Unit	Test Standard
ISO Data			
Melting Temperature (10°C/min)	220 / *	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	210 / *	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	220 / *	°C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 50N	220 / *	°C	ISO 306
Coeff. of Linear Therm. Expansion, parallel	20 / *	E-6/K	ISO 11359-1/-2
Coeff. of Linear Therm. Expansion, normal	102 / *	E-6/K	ISO 11359-1/-2
Burning Behav. at 1.5 mm Nom. Thickn.	HB / *	class	UL 94
Thickness tested	1.6 / *	mm	-
UL recognition	yes / *	-	-
Oxygen index	22.5 / *	%	ISO 4589-1/-2

Electrical Properties	dry / cond	Unit	Test Standard
ISO Data			
Relative permittivity, 1MHz	3.9 / 6.2	-	IEC 62631-2-1
Dissipation Factor, 100Hz	210 / 1900	E-4	IEC 62631-2-1
Dissipation Factor, 1MHz	210 / 1900	E-4	IEC 62631-2-1
Volume Resistivity	1E13 / 1E10	Ohm*m	IEC 62631-3-1
Surface Resistivity	* / 1E10	Ohm	IEC 62631-3-2
Electric Strength	41 / 35	kV/mm	IEC 60243-1
Comparative tracking index	- / 575	-	IEC 60112

Other Properties	dry / cond	Unit	Test Standard
ISO Data			
Water Absorption	6.2 / *	%	Sim. to ISO 62
Humidity absorption	2 / *	%	Sim. to ISO 62
Density	1410 / -	kg/m³	ISO 1183

Material Specific Properties	dry / cond	Unit	Test Standard
ISO Data			
Viscosity number	140 / *	cm³/g	ISO 307, 1157, 1628

Test specimen production	Value	Unit	Test Standard
ISO Data			
Injection Molding, melt temperature	280	°C	ISO 294
Injection Molding, mold temperature	80	°C	ISO 294
Injection Molding, injection velocity	200	mm/s	ISO 294


Ultramid® B3EG7
PA6-GF35

BASF


Processing Recommendation Injection Molding	Value	Unit	Test Standard
Pre-drying - Temperature	80	°C	-
Pre-drying - Time	4	h	-
Processing humidity	≤0.15	%	-
Melt temperature	270 - 290	°C	-
Mold temperature	80 - 90	°C	-

Diagrams


Viscosity-shear rate

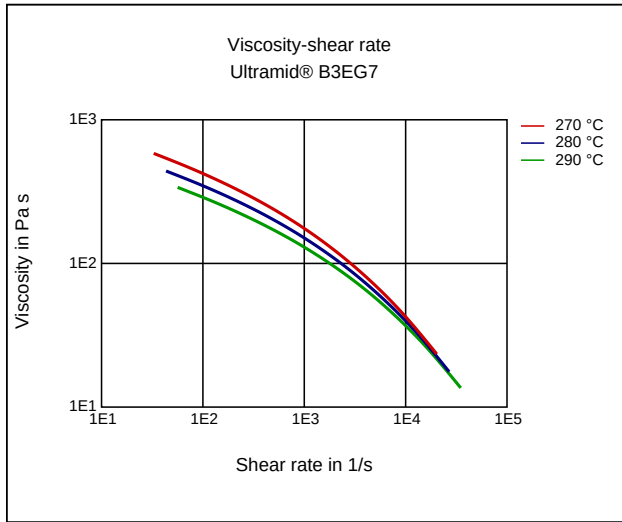


Shearstress-shear rate

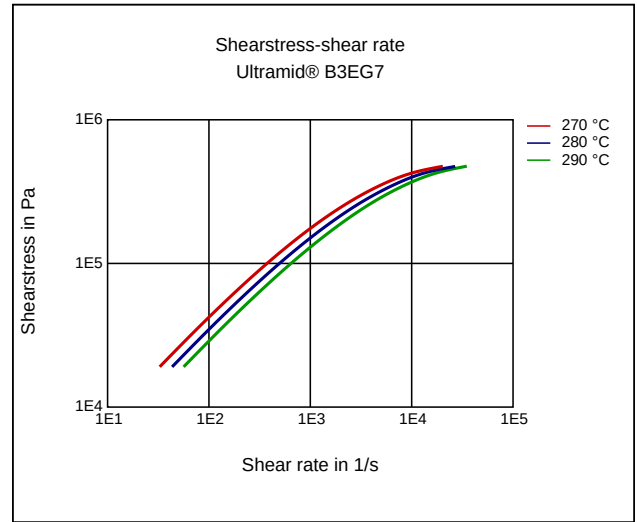

Dynamic Shear modulus-temperature

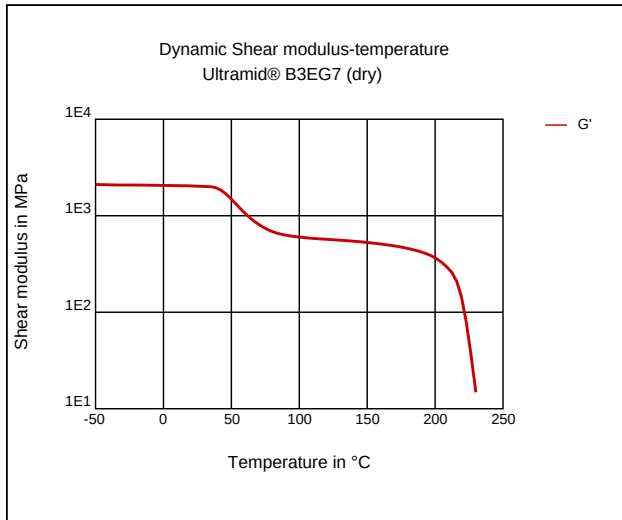


Stress-strain

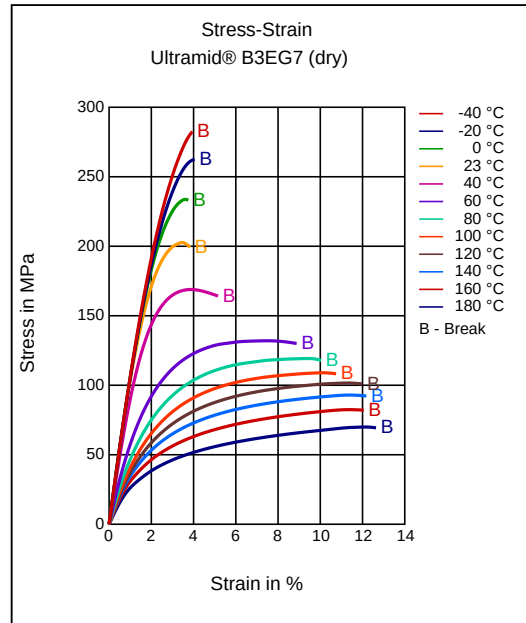


Ultramid® B3EG7
PA6-GF35

BASF


Stress-strain

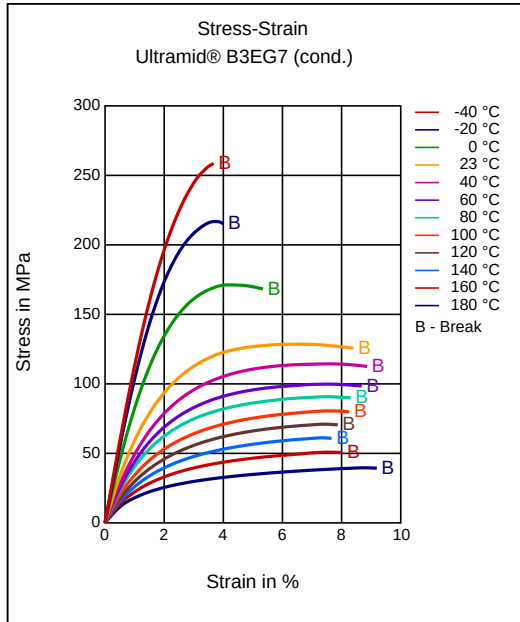


Secant modulus-strain

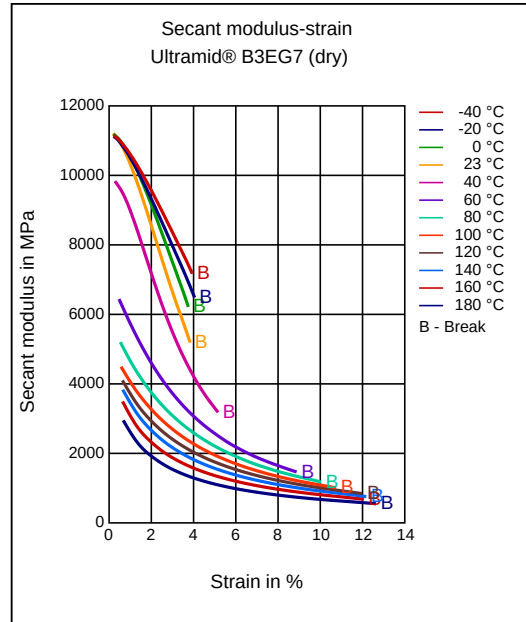

Secant modulus-strain

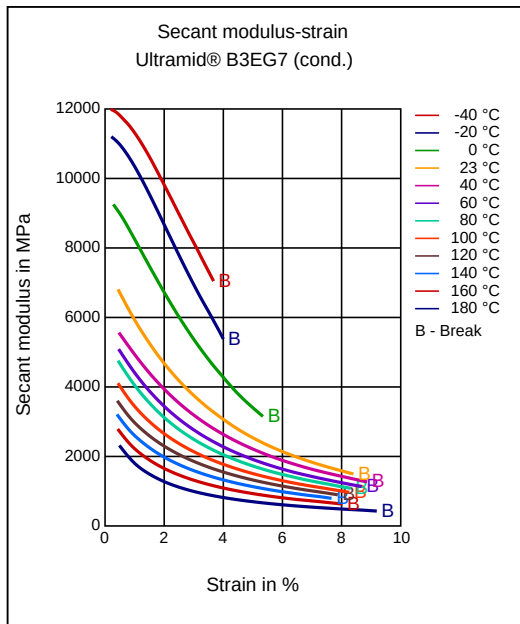


Tensile Modulus-Temperature

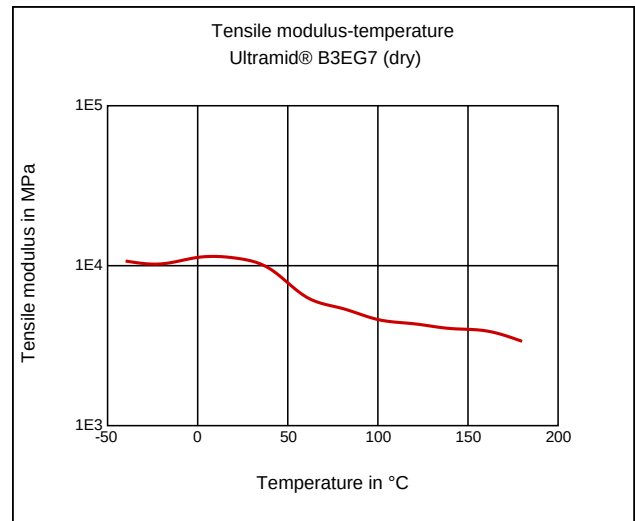

Ultramid® B3EG7
PA6-GF35

BASF

Tensile Modulus-Temperature

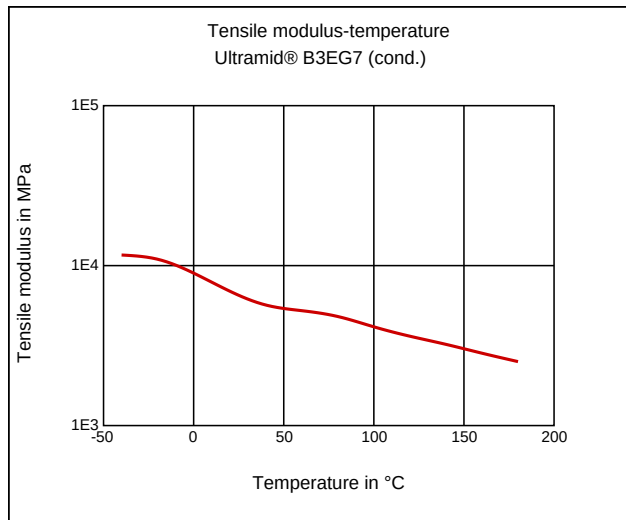

Characteristics

Processing

Injection Molding

Additives

Lubricants, Release agent

Delivery form

Pellets

Special Characteristics

Heat aging stabilized

Injection Molding

PREPROCESSING

Pre/Post-processing, max. allowed water content: .15 %

Pre/Post-processing, Pre-drying, Temperature: 80 °C

Pre/Post-processing, Pre-drying, Time: 4 h

PROCESSING

injection molding, Melt temperature, range: 270 - 290 °C

injection molding, Melt temperature, recommended: 280 °C

injection molding, Mold temperature, range: 80 - 90 °C

injection molding, Mold temperature, recommended: 80 °C

injection molding, Dwell time, thermoplastics: 10 min