

Ultramid® B3UGM210

PA6-(GF+MD)60 FR(61)

BASF

Without halogens and phosphorous flame retardant glass fiber reinforced injection molding grade with very high rigidity for plastic parts in electrical applications. The product is light colorable and provides good mechanical and electrical properties as well as a low smoke density. Due to the halide free stabilization the impact on corrosion is minimized and sensitive electronic components are better protected.

Rheological properties	dry / cond	Unit	Test Standard
ISO Data			
Melt volume-flow rate, MVR	30 / *	cm³/10min	ISO 1133
Temperature	275 / *	°C	-
Load	5 / *	kg	-
Molding shrinkage, parallel	0.6 / *	%	ISO 294-4, 2577
Molding shrinkage, normal	0.7 / *	%	ISO 294-4, 2577

Mechanical Properties	dry / cond	Unit	Test Standard
ISO Data			
Tensile Modulus	11000 / 6500	MPa	ISO 527
Stress at Break	110 / 80	MPa	ISO 527
Strain at Break	1.8 / 2.5	%	ISO 527
Impact Strength (Charpy), +23°C	30 / 30	kJ/m²	ISO 179/1eU
Impact Strength (Charpy), -30°C	30 / -	kJ/m²	ISO 179/1eU
Notched Impact Strength (Charpy), +23°C	2.5 / 4	kJ/m²	ISO 179/1eA
Notched Impact Strength (Charpy), -30°C	2.7 / -	kJ/m²	ISO 179/1eA

Thermal Properties	dry / cond	Unit	Test Standard
ISO Data			
Melting Temperature (10°C/min)	220 / *	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	195 / *	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	215 / *	°C	ISO 75-1/-2
Coeff. of Linear Therm. Expansion, parallel	35 / *	E-6/K	ISO 11359-1/-2
Coeff. of Linear Therm. Expansion, normal	54 / *	E-6/K	ISO 11359-1/-2
Burning Behav. at 1.5 mm Nom. Thickn.	V-0 / *	class	UL 94
Thickness tested	1.6 / *	mm	-
UL recognition	yes / *	-	-
Burning Behav. at thickness h	V-2 / *	class	UL 94
Thickness tested	0.8 / *	mm	-
UL recognition	yes / *	-	-
Oxygen index	52 / *	%	ISO 4589-1/-2

Electrical Properties	dry / cond	Unit	Test Standard
ISO Data			
Relative permittivity, 1MHz	4.5 / 5	-	IEC 62631-2-1
Dissipation Factor, 1MHz	150 / 500	E-4	IEC 62631-2-1
Volume Resistivity	1E13 / 1E9	Ohm*m	IEC 62631-3-1
Surface Resistivity	* / 1E12	Ohm	IEC 62631-3-2
Electric Strength	35 / 35	kV/mm	IEC 60243-1
Comparative tracking index	- / 600	-	IEC 60112

Other Properties	dry / cond	Unit	Test Standard
ISO Data			
Water Absorption	4.4 / *	%	Sim. to ISO 62
Humidity absorption	1.2 / *	%	Sim. to ISO 62
Density	1670 / -	kg/m³	ISO 1183

Test specimen production	Value	Unit	Test Standard
ISO Data			
Injection Molding, melt temperature	290	°C	ISO 294
Injection Molding, mold temperature	80	°C	ISO 294
Injection Molding, injection velocity	200	mm/s	ISO 294

Processing Recommendation Injection Molding	Value	Unit	Test Standard
Pre-drying - Temperature	80	°C	-
Pre-drying - Time	4	h	-


Ultramid® B3UGM210
PA6-(GF+MD)60 FR(61)

BASF


Processing humidity	≤0.15	%	-
Melt temperature	290 - 310	°C	-
Mold temperature	80 - 90	°C	-

Diagrams


Stress-strain

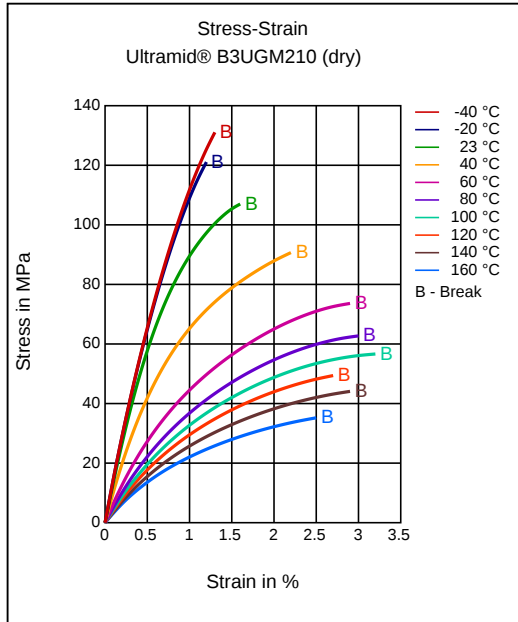


Stress-strain

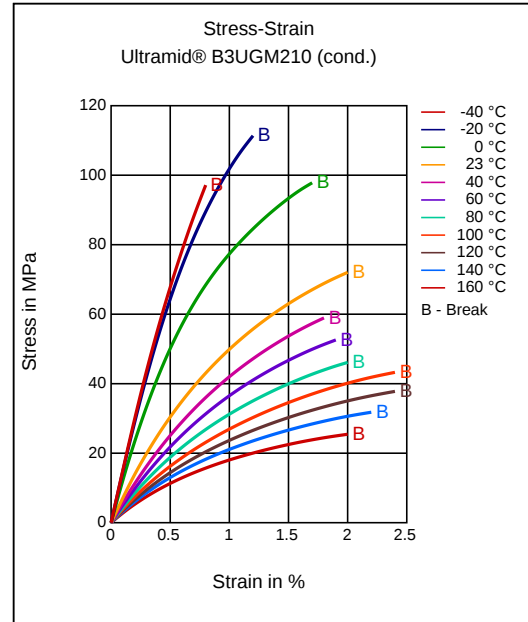

Secant modulus-strain

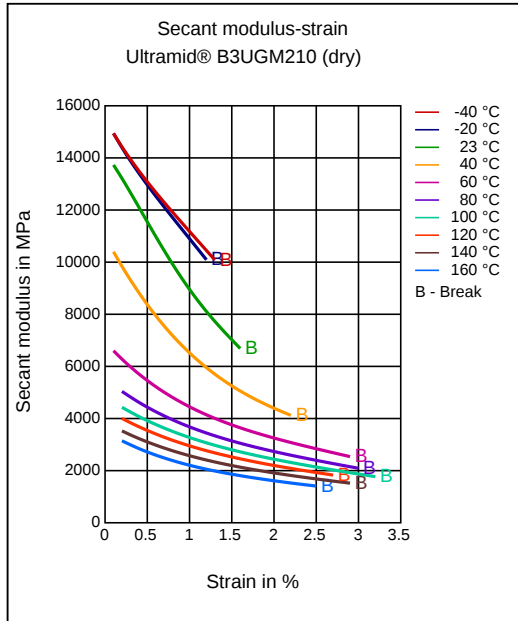


Secant modulus-strain

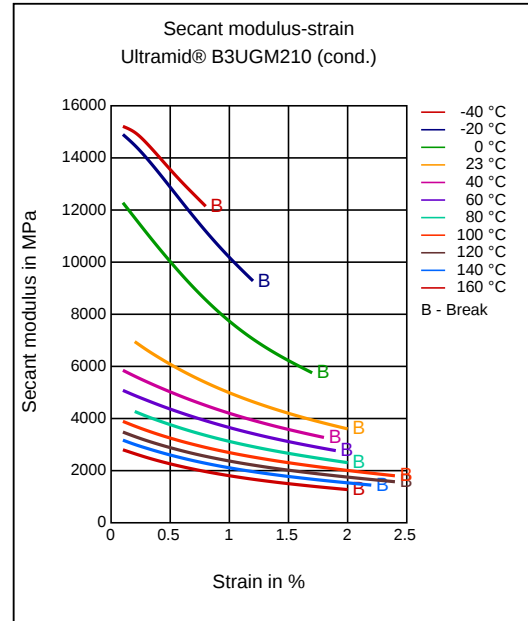


Ultramid® B3UGM210
PA6-(GF+MD)60 FR(61)

BASF

Stress-strain (isochronous) 23 °C

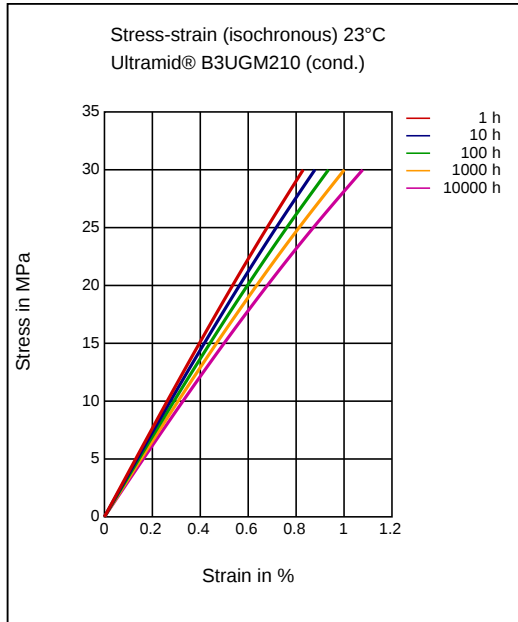

Creep modulus-time 23 °C

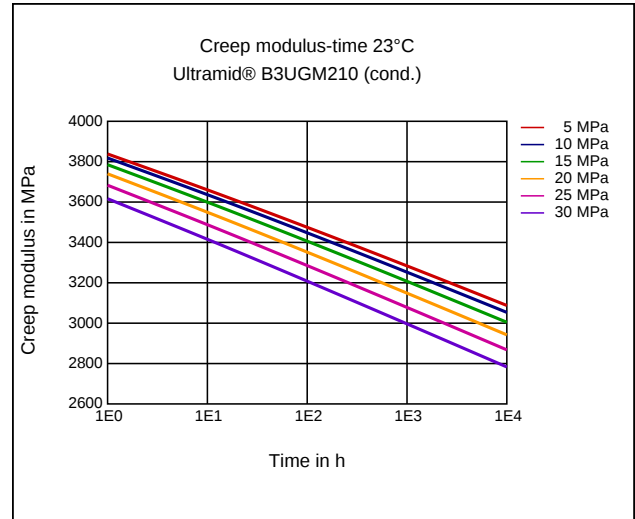

Characteristics

Processing

Injection Molding

Delivery form

Pellets

Additives

Release agent

Special Characteristics

Flame retardant, Halogen-free, Heat aging stabilized

Injection Molding

PREPROCESSING

Pre/Post-processing, max. allowed water content: .15 %

Pre/Post-processing, Pre-drying, Temperature: 80 °C

Pre/Post-processing, Pre-drying, Time: 4 h

PROCESSING

injection molding, Melt temperature, range: 290 - 310 °C

injection molding, Melt temperature, recommended: 300 °C

injection molding, Mold temperature, range: 80 - 90 °C

injection molding, Mold temperature, recommended: 80 °C

injection molding, Dwell time, thermoplastics: 10 min