

Ultradur® B 4300 G3 High Speed

PBT-GF15

BASF

Easy flowing injection molding grade with 15 % glass fibers for technical parts; rigid, tough and dimensionally stable, e.g. switches, connectors and small automotive parts.

Abbreviated designation according to ISO 1043: PBT-GF15

Rheological properties	Value	Unit	Test Standard
ISO Data			
Melt volume-flow rate, MVR	24	cm ³ /10min	ISO 1133
Temperature	250	°C	-
Load	2.16	kg	-
Molding shrinkage, parallel	0.7	%	ISO 294-4, 2577
Molding shrinkage, normal	1.1	%	ISO 294-4, 2577

Mechanical Properties	Value	Unit	Test Standard
ISO Data			
Tensile Modulus	5600	MPa	ISO 527
Stress at Break	100	MPa	ISO 527
Strain at Break	3.7	%	ISO 527
Impact Strength (Charpy), +23°C	30	kJ/m ²	ISO 179/1eU
Impact Strength (Charpy), -30°C	30	kJ/m ²	ISO 179/1eU
Notched Impact Strength (Charpy), +23°C	5	kJ/m ²	ISO 179/1eA

Thermal Properties	Value	Unit	Test Standard
ISO Data			
Melting Temperature (10°C/min)	223	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	185	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	215	°C	ISO 75-1/-2
Burning Behav. at 1.5 mm Nom. Thickn.	HB	class	UL 94
Thickness tested	1.5	mm	-
UL recognition	yes	-	-
Burning Behav. at thickness h	HB	class	UL 94
Thickness tested	0.8	mm	-
UL recognition	yes	-	-

Electrical Properties	Value	Unit	Test Standard
ISO Data			
Relative permittivity, 100Hz	3.7	-	IEC 62631-2-1
Relative permittivity, 1MHz	3.7	-	IEC 62631-2-1
Dissipation Factor, 100Hz	12	E-4	IEC 62631-2-1
Dissipation Factor, 1MHz	150	E-4	IEC 62631-2-1
Volume Resistivity	>1E13	Ohm*m	IEC 62631-3-1
Surface Resistivity	1E13	Ohm	IEC 62631-3-2
Electric Strength	37	kV/mm	IEC 60243-1
Comparative tracking index	300	-	IEC 60112

Other Properties	Value	Unit	Test Standard
ISO Data			
Water Absorption	0.4	%	Sim. to ISO 62
Humidity absorption	0.2	%	Sim. to ISO 62
Density	1410	kg/m ³	ISO 1183

Material Specific Properties	Value	Unit	Test Standard
ISO Data			
Viscosity number	100	cm ³ /g	ISO 307, 1157, 1628

Rheological calculation properties	Value	Unit	Test Standard
ISO Data			
Density of melt	1160	kg/m ³	-
Thermal Conductivity of Melt	0.185	W/(m K)	-
Spec. heat capacity of melt	1940	J/(kg K)	-
Ejection temperature	172	°C	-

Ultradur® B 4300 G3 High Speed PBT-GF15


BASF

Test specimen production	Value	Unit	Test Standard
ISO Data			
Injection Molding, melt temperature	260	°C	ISO 294
Injection Molding, mold temperature	80	°C	ISO 294
Injection Molding, injection velocity	200	mm/s	ISO 294


Processing Recommendation Injection Molding	Value	Unit	Test Standard
Pre-drying - Temperature	80 - 120	°C	-
Pre-drying - Time	4	h	-
Processing humidity	≤0.04	%	-
Melt temperature	230 - 275	°C	-
Mold temperature	60 - 100	°C	-

Diagrams


Viscosity-shear rate

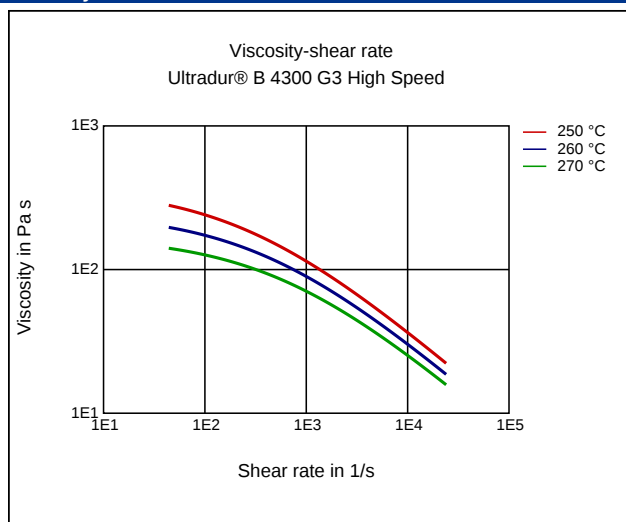


Shearstress-shear rate

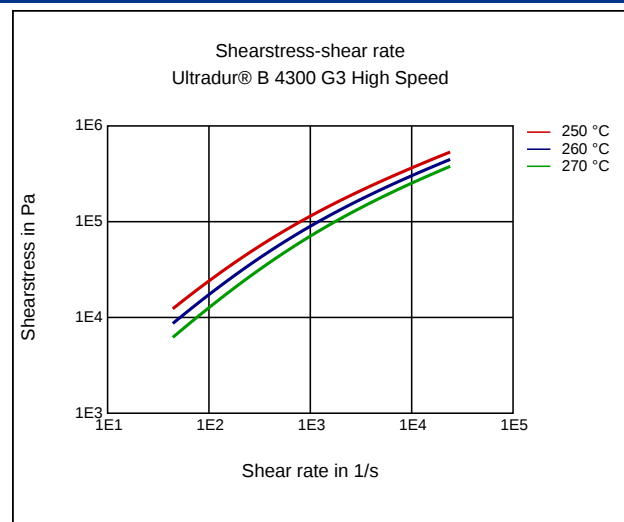

Stress-strain

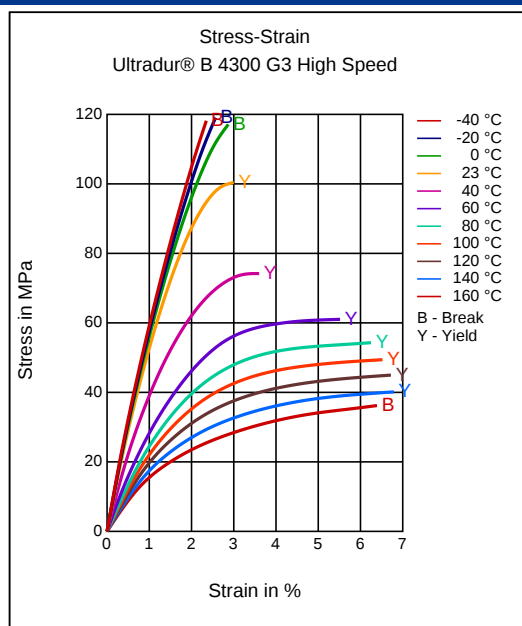


Secant modulus-strain

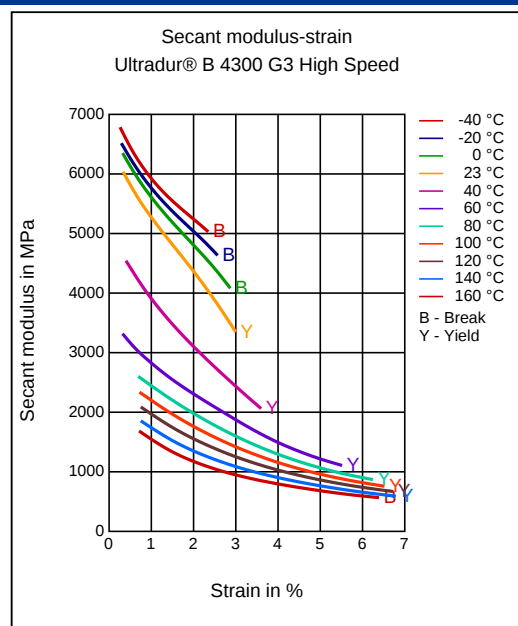


Ultradur® B 4300 G3 High Speed PBT-GF15

BASF

Specific volume-temperature (pvT)

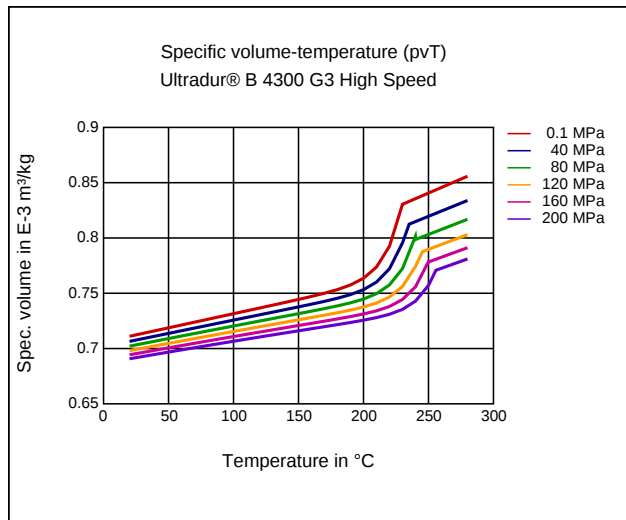

Tensile Modulus-Temperature

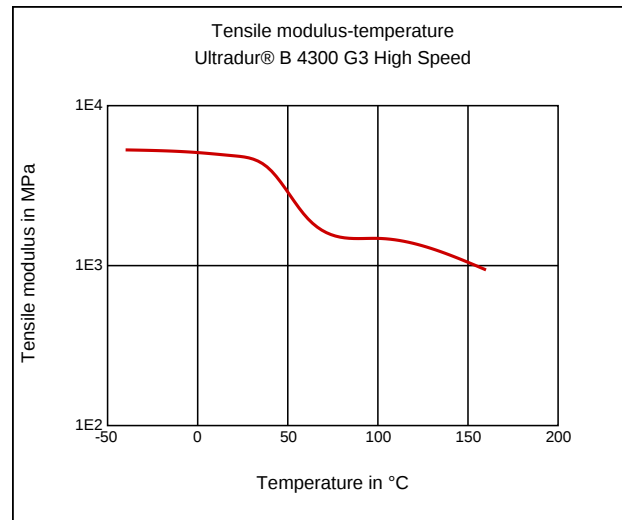

Characteristics

Processing

Injection Molding

Delivery form

Pellets

Additives

Lubricants

Special Characteristics

Light stabilized or stable to light, UV stablized, Heat aging stabilized

Injection Molding

PREPROCESSING

Pre/Post-processing, max. allowed water content: .04 %

Pre/Post-processing, Pre-drying, Temperature: 80 - 120 °C

Pre/Post-processing, Pre-drying, Time: 4 h

PROCESSING

injection molding, Melt temperature, range: 230 - 275 °C

injection molding, Melt temperature, recommended: 260 °C

injection molding, Mold temperature, range: 60 - 100 °C

injection molding, Mold temperature, recommended: 80 °C

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass) (23°C)