

**Grilon ELX 50 HNZ**

TPA

EMS-GRIVORY | a unit of EMS-CHEMIE AG

**Product Texts**

Product designation according to ISO 1874:

PA6/X-HI, BGH, 32-002

Mechanical properties	dry / cond	Unit	Test Standard
Tensile Modulus	<b>220 / 150</b>	MPa	ISO 527-1/-2
Stress at 50% strain	<b>16 / 12</b>	MPa	ISO 527-1/-2
Strain at break	<b>&gt;50 / &gt;50</b>	%	ISO 527-1/-2
Charpy impact strength (+23°C)	<b>N / N</b>	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy impact strength (-30°C)	<b>N / N</b>	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy notched impact strength (+23°C)	<b>N / N</b>	kJ/m <sup>2</sup>	ISO 179/1eA
Charpy notched impact strength (-30°C)	<b>N / N</b>	kJ/m <sup>2</sup>	ISO 179/1eA

Mechanical properties (TPE)	dry / cond	Unit	Test Standard
Shore D hardness (15s)	<b>50 / 47</b>	-	ISO 868

Thermal properties	dry / cond	Unit	Test Standard
Melting temperature (10°C/min)	<b>210 / -</b>	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	<b>35 / -</b>	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	<b>50 / -</b>	°C	ISO 75-1/-2
Coeff. of linear therm. expansion (parallel)	<b>160 / -</b>	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion (normal)	<b>170 / -</b>	E-6/K	ISO 11359-1/-2
Burning Behav. at thickness h	<b>HB / -</b>	class	IEC 60695-11-10
Thickness tested	<b>0.8 / -</b>	mm	IEC 60695-11-10
Max. usage temperature (long term)	<b>100 - 120</b>	°C	ISO 2578
Max. usage temperature (short term)	<b>180</b>	°C	EMS


Electrical properties	dry / cond	Unit	Test Standard
Volume resistivity	<b>1E9 / 1E8</b>	Ohm*m	IEC 60093
Surface resistivity	<b>- / 1E10</b>	Ohm	IEC 60093
Electric strength	<b>29 / 30</b>	kV/mm	IEC 60243-1
Comparative tracking index	<b>- / 575</b>	-	IEC 60112

Other properties	dry / cond	Unit	Test Standard
Water absorption	<b>6.5 / -</b>	%	Sim. to ISO 62
Humidity absorption	<b>2 / -</b>	%	Sim. to ISO 62
Density	<b>1010 / -</b>	kg/m <sup>3</sup>	ISO 1183


Rheo/Phys properties	dry / cond	Unit	Test Standard
Molding shrinkage (parallel)	<b>0.7 / -</b>	%	ISO 294-4, 2577
Molding shrinkage (normal)	<b>0.8 / -</b>	%	ISO 294-4, 2577

**Diagrams**



Viscosity-shear rate

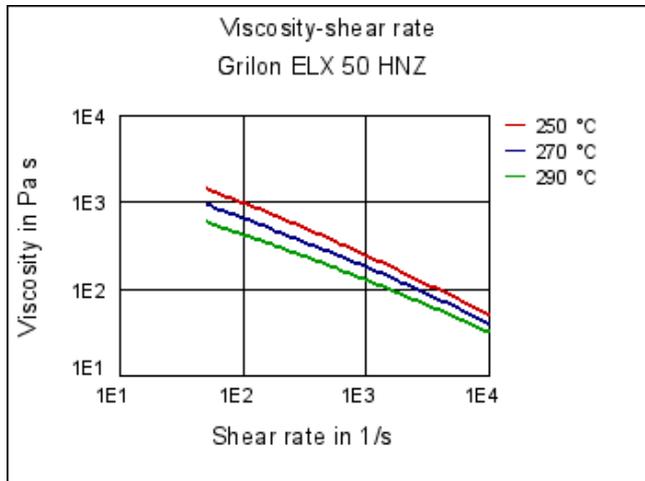


Shearstress-shear rate

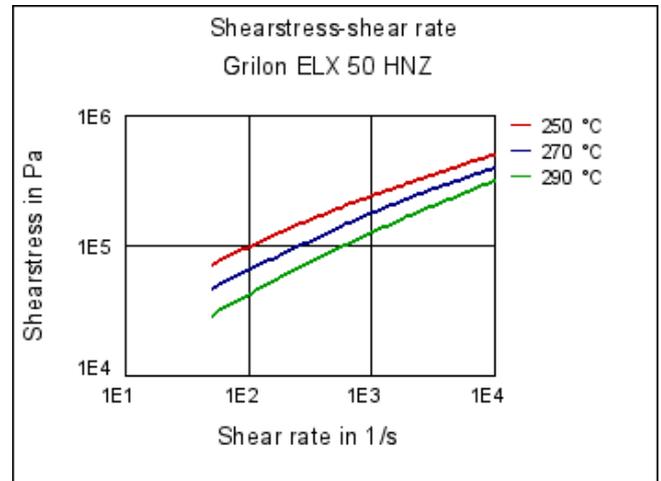


Dynamic Shear modulus-temperature

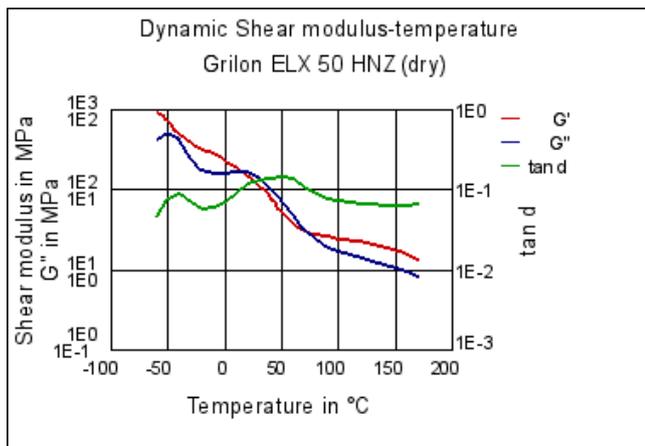


Dynamic Shear modulus-temperature

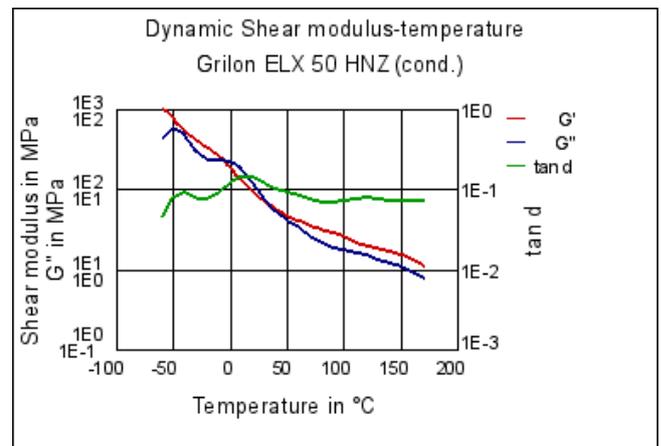


Stress-strain

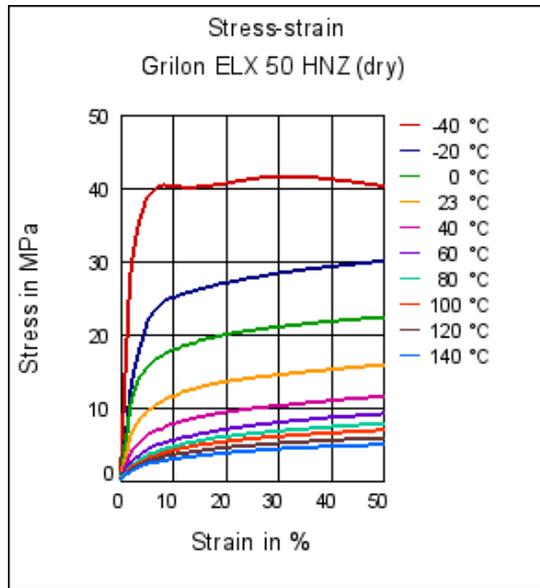


Stress-strain

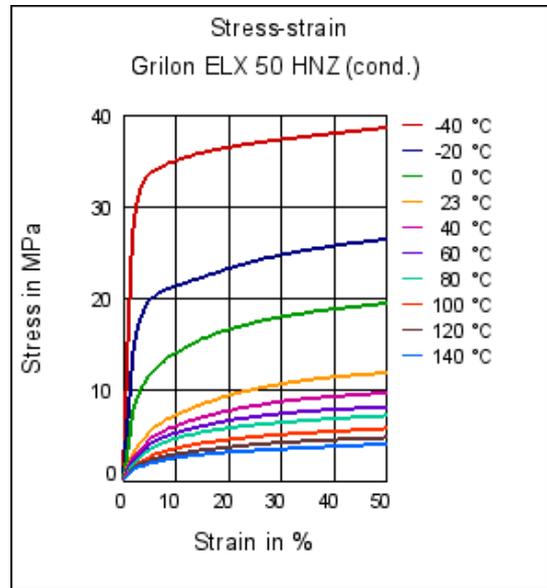


Secant modulus-strain

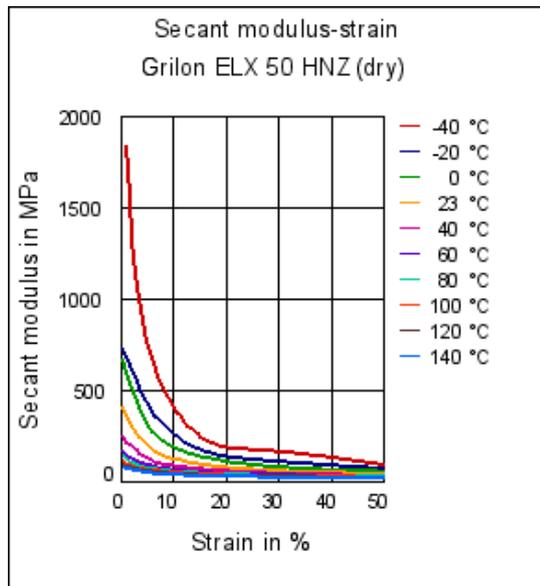

Secant modulus-strain

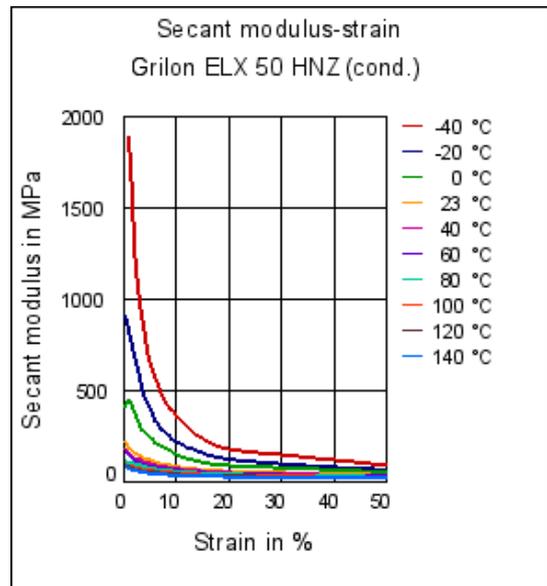

Tensile modulus-temperature

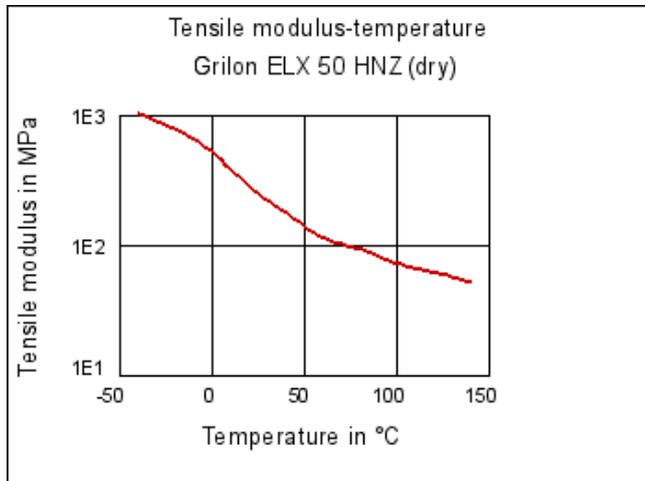

Characteristics

Processing

Extrusion - blow molding, Other Extrusion

Automotive

Air intake systems, Cooling and climate control

Delivery form

Granules

Electricals & Electronics

Cables & Tubes

Special Characteristics

High impact or impact modified, Improved heat resistance

Industry & Consumer goods

Hydraulics & Pneumatics

Regional Availability

North America, Europe, Asia Pacific, South and Central America, Near East/Africa

Chemical Media Resistance

Acids

- 😊 Acetic Acid (5% by mass) (23°C)
- 😊 Citric Acid solution (10% by mass) (23°C)
- 😊 Lactic Acid (10% by mass) (23°C)
- 🚫 Hydrochloric Acid (36% by mass) (23°C)
- 🚫 Nitric Acid (40% by mass) (23°C)
- 🚫 Sulfuric Acid (38% by mass) (23°C)
- 🚫 Sulfuric Acid (5% by mass) (23°C)
- 🚫 Chromic Acid solution (40% by mass) (23°C)

Bases

- 😊 Sodium Hydroxide solution (35% by mass) (23°C)
- 😊 Sodium Hydroxide solution (1% by mass) (23°C)
- 😊 Ammonium Hydroxide solution (10% by mass) (23°C)

Alcohols



- ☺ Isopropyl alcohol (23°C)
- ☺ Methanol (23°C)
- ☺ Ethanol (23°C)

#### Hydrocarbons

- ☺ n-Hexane (23°C)
- ☺ Toluene (23°C)
- ☺ iso-Octane (23°C)

#### Ketones

- ☺ Acetone (23°C)

#### Ethers

- ☺ Diethyl ether (23°C)

#### Mineral oils

- ☺ SAE 10W40 multigrade motor oil (23°C)
- ☺ SAE 10W40 multigrade motor oil (130°C)
- ☺ SAE 80/90 hypoid-gear oil (130°C)
- ☺ Insulating Oil (23°C)

#### Standard Fuels

- ☺ ISO 1817 Liquid 1 (60°C)
- ☺ ISO 1817 Liquid 2 (60°C)
- ☺ ISO 1817 Liquid 3 (60°C)
- ☺ ISO 1817 Liquid 4 (60°C)
- ☺ Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)
- ☺ Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)
- ☺ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
- ☺ Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
- ☺ Diesel fuel (pref. ISO 1817 Liquid F) (>90°C)

#### Salt solutions

- ☺ Sodium Chloride solution (10% by mass) (23°C)
- ☹ Sodium Hypochlorite solution (10% by mass) (23°C)
- ☺ Sodium Carbonate solution (20% by mass) (23°C)
- ☺ Sodium Carbonate solution (2% by mass) (23°C)
- ☺ Zinc Chloride solution (50% by mass) (23°C)

#### Other

- ☺ Ethyl Acetate (23°C)
- ☹ Hydrogen peroxide (23°C)
- ☺ DOT No. 4 Brake fluid (130°C)
- ☺ Ethylene Glycol (50% by mass) in water (108°C)
- ☺ 1% nonylphenoxy-polyethyleneoxy ethanol in water (23°C)
- ☺ 50% Oleic acid + 50% Olive Oil (23°C)
- ☺ Water (23°C)
- ☺ Deionized water (90°C)
- ☹ Phenol solution (5% by mass) (23°C)

