

RADIFLAM A FR 5138 OR

PRELIMINARY

DESCRIPTION

PA66 flame retardant injection moulding grade. Halogen and red phosphorus free. Orange colour.

Suitable for parts where fire retardancy is required. Rated V-0 at 0.4 mm according to UL-94. Also suitable for monofilament extrusion.

ISO 1043: PA66 FR(30)

REGIONAL AVAILABILITY: North America, Europe, Asia Pacific, South and Central America, Near East/Africa

THE CHARACTERISTICS SHOWN HERE MUST BE CONSIDERED PRELIMINARY AND INDICATIVE FOR A PRODUCT AT DEVELOPMENTAL STAGE

MATERIAL HANDLING AND PROCESSING

The material is delivered in moisture-proof packaging ready for processing. Maximum recommended water content for best processing is 0.10%. Typical conditions with a desiccant drier: temperature 80 ° C, dew point -20 ° C or below, time 2-4 h or more. Avoid excessive shear rates and high thermal stresses for better processing. Special care must be taken to avoid moisture absorption and contamination with other polymers when adding regrind material. Colour variation and mechanical properties reduction may occur and should always be carefully monitored.

Injection Molding Processing Parameters

Melt Temperature
270 - 290°C

Mold Temperature
60 - 80°C

Injection Speed
medium

Extrusion Temperature
270 - 290°C

PRODUCT SAFETY AND APPROVALS

For safety instruction please refer to Material Safety Data Sheet
Underwriters Laboratories Inc. certified material www.ul.com
ROHS compliant 2011/65/EU and following amendments



RADIFLAM A FR 5138 OR

PROPERTY	STANDARD	UNIT	VALUE		
			DAM*	Cond**	
PHYSICAL PROPERTIES					
Density	ISO 1183	kg/m ³	1180		
Viscosity Index (Sulfuric Acid)	ISO 307	ml/g		120	
MECHANICAL PROPERTIES					
Tensile Modulus	1mm/min	ISO 527-2/1A	MPa	3400	
Stress at Yield	50mm/min	ISO 527-2/1A	MPa	75	
Yield Strain	50mm/min	ISO 527-2/1A	%	4.1	
Nominal Strain at Break	50mm/min	ISO 527-2/1A	%	6	
Flexural Modulus	2mm/min	ISO 178	MPa	3400	
Flexural Strength	2mm/min	ISO 178	MPa	115	
Charpy Impact Strength	+23°C	ISO 179/1eU	kJ/m ²	50	
Charpy Impact Strength	-30°C	ISO 179/1eU	kJ/m ²	52	
Charpy Notched Impact Strength	+23°C	ISO 179/1eA	kJ/m ²	2.3	
Charpy Notched Impact Strength	-30°C	ISO 179/1eA	kJ/m ²	2.3	
THERMAL PROPERTIES					
Melting Temperature	10°C/min	ISO 11357-1/-3	°C	255	
Heat Deflection Temperature	1.80 MPa	ISO 75/2Af	°C	70	
FLAMMABILITY PROPERTIES					
Flammability	0.8mm	UL 94	class	V-0	
Flammability	0.4mm	UL 94	class	V-0	
Glow Wire Flammability Index	1mm	IEC 60695-2-12	°C	960	
Glow Wire Flammability Index	2mm	IEC 60695-2-12	°C	960	
Glow Wire Ignition Temperature	1mm	IEC 60695-2-13	°C	700	
Glow Wire Ignition Temperature	2mm	IEC 60695-2-13	°C	700	
Automotive Interior Flammability	3mm	ISO 3795	mm/min	0	
ELECTRICAL PROPERTIES					
Volume Resistivity	500V	IEC 62631-3-1	Ohm*m	1E13	1E11
Surface Resistivity	500V	IEC 62631-3-2	Ohm	1E12	1E10
Comparative Tracking Index	SoI.A	IEC 60112	V	600	


*: DAM = Dry As Moulded state according to ISO 16396-2, **: Cond = Conditioned state similar to ISO 1110



RADIFLAM A FR 5138 OR

DIAGRAMS

Stress-strain (dry)

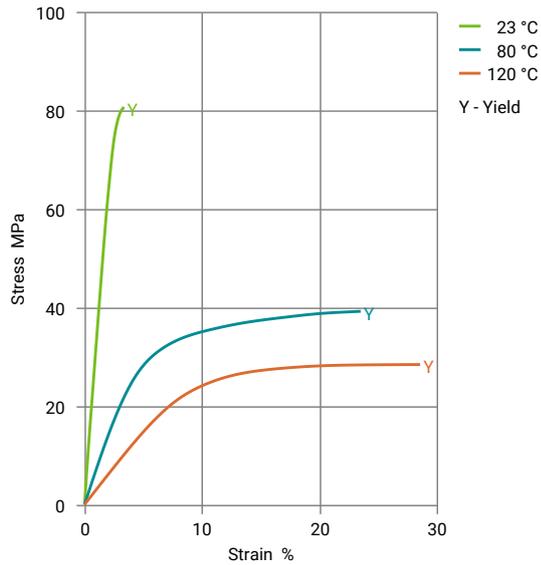

Secant modulus-strain (dry)

