

RADIFLAM S FR 100 NT

DESCRIPTION

PA6 flame retardant injection moulding grade. Halogen and phosphorus free. Natural colour.

Suitable for parts where fire retardancy is required. Rated V-0 at 0.4 mm according to UL-94.

ISO 1043: PA6 FR(30)

REGIONAL AVAILABILITY: North America, Europe, Asia Pacific, South and Central America, Near East/Africa

MATERIAL HANDLING AND PROCESSING

The material is delivered in moisture-proof packaging ready for processing. Maximum recommended water content for best processing is 0.10%. Typical conditions with a desiccant drier: temperature 80 ° C, dew point -20 ° C or below, time 2-4 h or more. Avoid excessive shear rates and high thermal stresses for better processing. Special care must be taken to avoid moisture absorption and contamination with other polymers when adding regrind material. Colour variation and mechanical properties reduction may occur and should always be carefully monitored.

Injection Molding Processing Parameters

Melt Temperature
240 - 280°C

Mold Temperature
70 - 80°C

Injection Speed
medium

PRODUCT SAFETY AND APPROVALS

For safety instruction please refer to Material Safety Data Sheet
Underwriters Laboratories Inc. certified material www.ul.com
ROHS compliant 2011/65/EU and following amendments



RADIFLAM S FR 100 NT

PROPERTY	STANDARD	UNIT	VALUE	
			DAM*	Cond**
PHYSICAL PROPERTIES				
Density		kg/m ³	1170	
Moulding shrinkage - Parallel / Normal	270/70/60 ^[1]	ISO 1183 ISO 294-4	%	1.1 / 1.1
Water Absorption, immersion at 23°C	2mm	ISO 62	%	8
Moisture Absorption 23°C - 50%RH	2mm	ISO 62	%	2
MECHANICAL PROPERTIES				
Tensile Modulus	1mm/min	ISO 527-2/1A	MPa	3500
Stress at Yield	50mm/min	ISO 527-2/1A	MPa	75
Yield Strain	50mm/min	ISO 527-2/1A	%	4
Nominal Strain at Break	50mm/min	ISO 527-2/1A	%	13
Flexural Modulus	2mm/min	ISO 178	MPa	3300
Flexural Strength	2mm/min	ISO 178	MPa	110
Charpy Notched Impact Strength	+23°C	ISO 179/1eA	kJ/m ²	4
Charpy Notched Impact Strength	-30°C	ISO 179/1eA	kJ/m ²	2.4
THERMAL PROPERTIES				
Melting Temperature	10°C/min	ISO 11357-1/-3	°C	220
Heat Deflection Temperature	1.80 MPa	ISO 75/2Af	°C	55
Heat Deflection Temperature	0.45 MPa	ISO 75/2Bf	°C	160
Vicat Softening Temperature	50°C/h 50N	ISO 306	°C	195
FLAMMABILITY PROPERTIES				
Flammability	0.4mm	UL 94	class	V-0
Flammability	0.8mm	UL 94	class	V-0
Glow Wire Flammability Index	1mm	IEC 60695-2-12	°C	960
Glow Wire Flammability Index	2mm	IEC 60695-2-12	°C	960
Glow Wire Ignition Temperature	1mm	IEC 60695-2-13	°C	800
Glow Wire Ignition Temperature	2mm	IEC 60695-2-13	°C	800
Automotive Interior Flammability	3mm	ISO 3795	mm/min	0
Limiting Oxygen Index	23°C	ISO 4589-2	%	36
ELECTRICAL PROPERTIES				
Volume Resistivity	500V	IEC 62631-3-1	Ohm*m	1E13
Surface Resistivity	500V	IEC 62631-3-2	Ohm	1E12
Electric Strength		IEC 60243-1	kV/mm	31
Comparative Tracking Index	Sol.A	IEC 60112	V	600

*: DAM = Dry As Moulded state according to ISO 16396-2, **: Cond = Conditioned state similar to ISO 1110


1: Melt Temperature [°C] / Mold Temperature [°C] / Cavity Pressure [MPa]




RADIFLAM S FR 100 NT

DIAGRAMS


Viscosity-shear rate

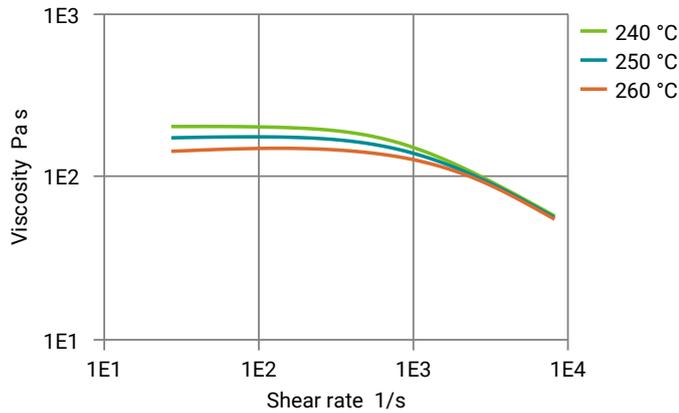


Shearstress-shear rate

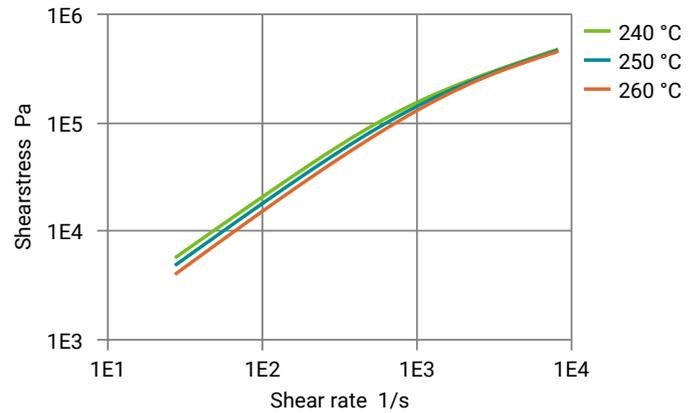

Stress-strain (cond.)

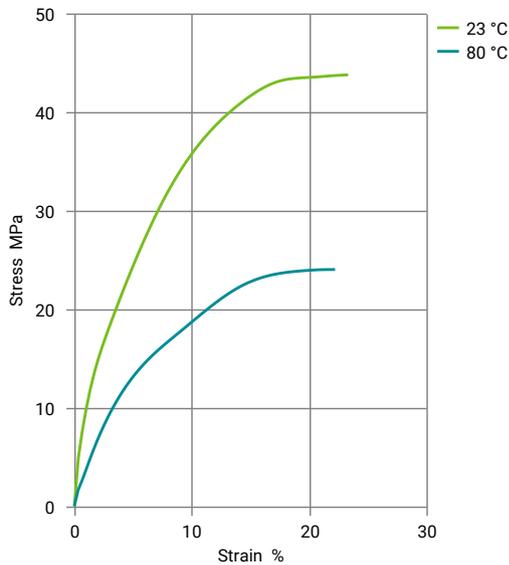

Stress-strain (dry)

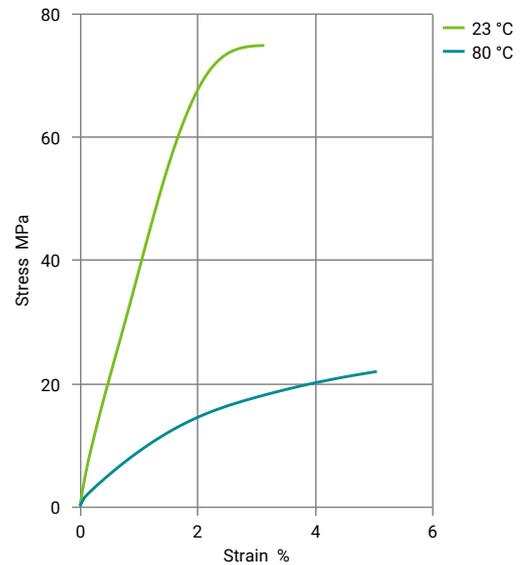

RADIFLAM S FR 100 NT

Specific volume-temperature (pvT)

