

TECHNICAL DATA SHEET

Akulon® K224-G3

Envalior
PA6-GF15

Processing

Injection molding

Pellets

Additives

Release agent

Delivery Form

Product Text

Product Information

15% Glass Reinforced

ISO 1043 PA6-GF15

Processing/Physical Characteristics	Value	Unit	Standard
Molding shrinkage, parallel	0.32	%	ISO 294-4, 2577
Molding shrinkage, normal	0.96	%	ISO 294-4, 2577
Density of melt	1027	kg/m ³	
Thermal conductivity of melt	0.26	W/(m K)	
Spec. heat capacity of melt	2400	J/(kg K)	
Eff. thermal diffusivity	1.03E-7	m ² /s	
Mechanical Properties	Value	Unit	Standard
Tensile modulus	6000	MPa	ISO 527
Stress at break	125	MPa	ISO 527
Strain at break	3	%	ISO 527
Poisson's ratio	0.35		ISO 527
Charpy impact strength, +23°C	45	kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	40	kJ/m ²	ISO 179/1eU
Charpy notched impact strength, +23°C	7	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	6	kJ/m ²	ISO 179/1eA
Thermal Properties	Value	Unit	Standard
Melting temperature, 10°C/min	220	°C	ISO 11357-1/-3

Akulon® K224-G3





Envalior

Thermal Properties	Value	Unit	Standard
Temp. of deflection under load, 1.80 MPa	195	°C	ISO 75-1/-2
Temp. of deflection under load, 0.45 MPa	215	°C	ISO 75-1/-2
Coeff. of linear therm. expansion, parallel	30	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	80	E-6/K	ISO 11359-1/-2
Burning behav. at 1.5 mm nom. thickn.	HB	class	IEC 60695-11-10
Thickness tested	1.5	mm	
Yellow card available	yes		
Burning behav. at thickness h	HB	class	IEC 60695-11-10
Thickness tested	3	mm	
Yellow card available	yes		
Electrical Properties	Value	Unit	Standard
Relative permittivity, 100Hz	3.5		IEC 62631-2-1
Relative permittivity, 1MHz	4.7		IEC 62631-2-1
Dissipation factor, 100Hz	55	E-4	IEC 62631-2-1
Dissipation factor, 1MHz	180	E-4	IEC 62631-2-1
Volume resistivity	1E13	Ohm*m	IEC 62631-3-1
Surface resistivity	1E14	Ohm	IEC 62631-3-2
Electric strength	35	kV/mm	IEC 60243-1
Comparative tracking index	600		IEC 60112
Other Properties	Value	Unit	Standard
Water absorption	7.6	%	Sim. to ISO 62
Humidity absorption	2.3	%	Sim. to ISO 62
Density	1230	kg/m ³	ISO 1183

Diagrams

Akulon® K224-G3


Envalior

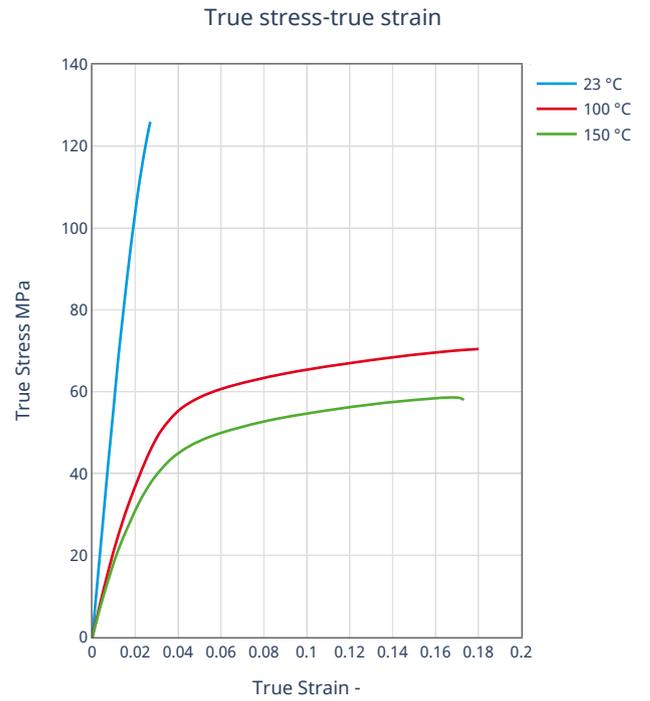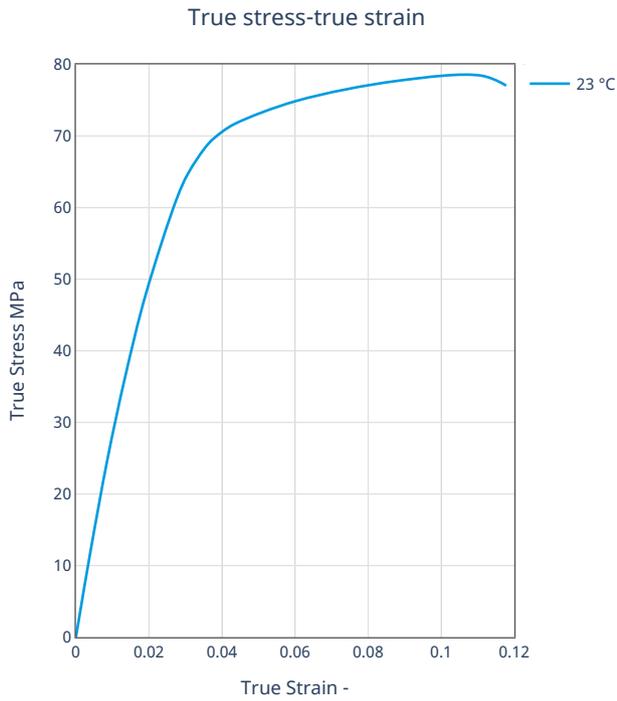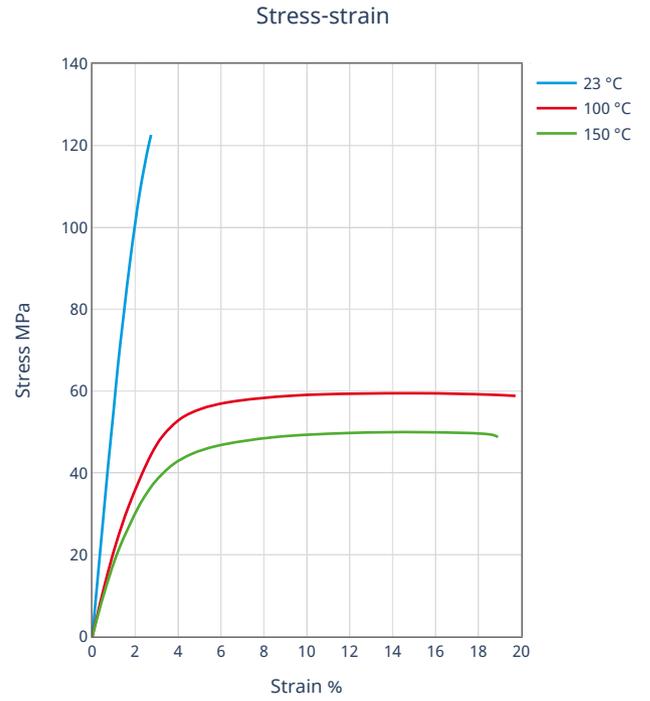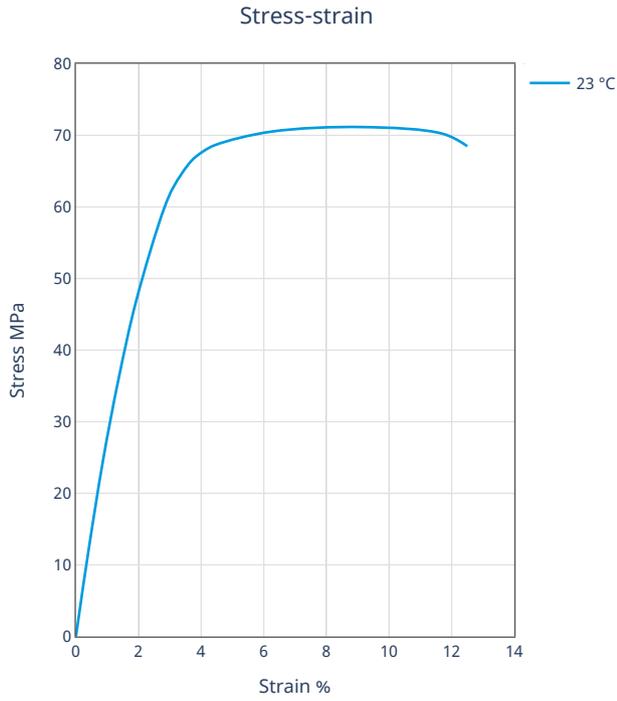


Akulon® K224-G3

Envalior


Secant modulus-strain

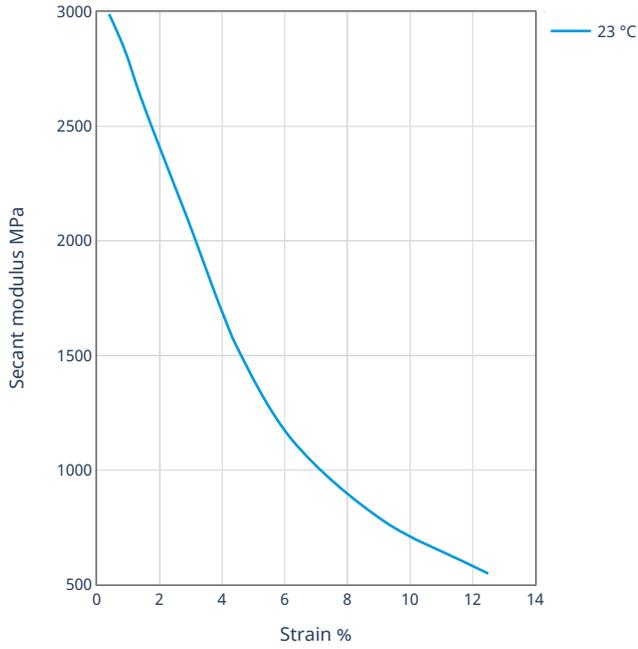


Secant modulus-strain

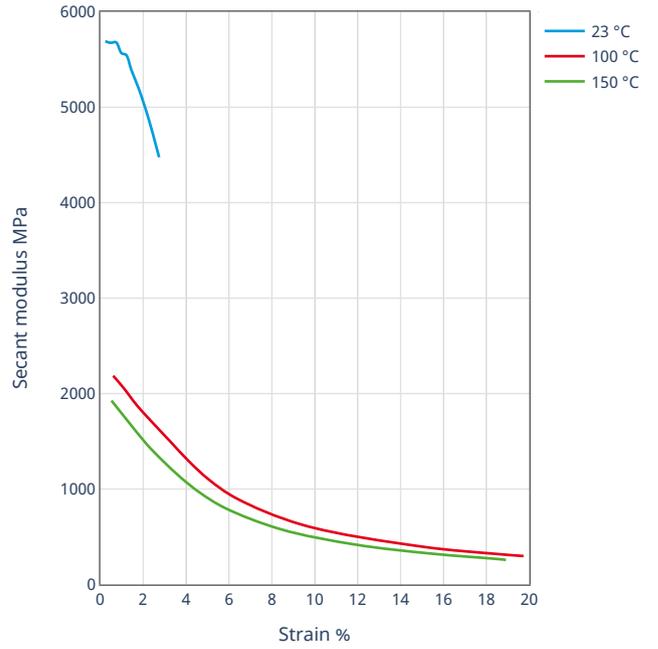

Viscosity-shear rate


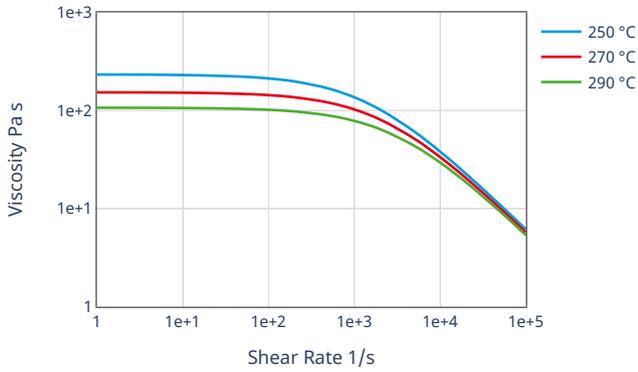


Shearstress-shear rate

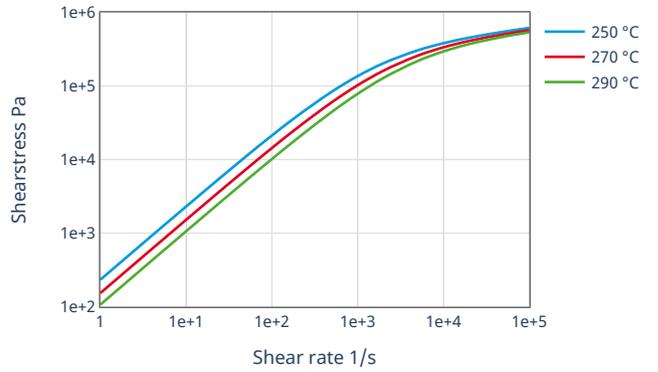

Akulon® K224-G3

Envalior

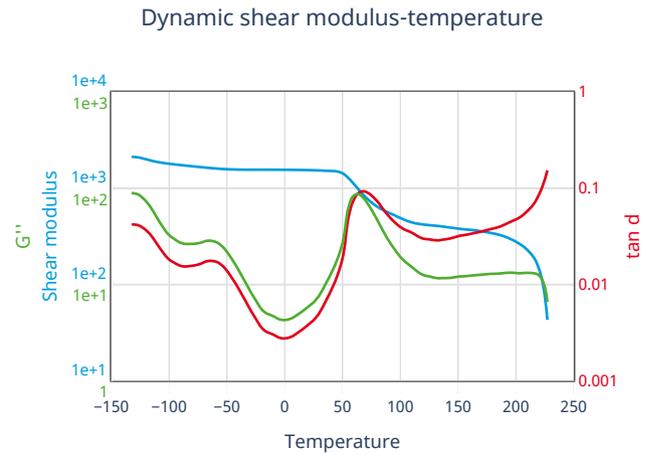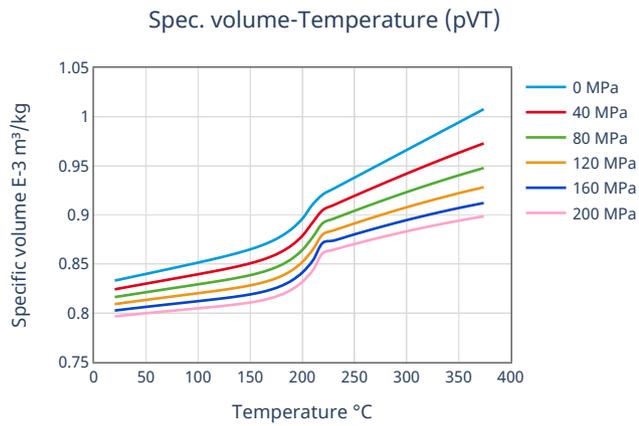

Processing Information

Injection molding

Injection Molding Recommendations

Steel recommendations for molds screws and barrels

Trouble shooting guideline for injection molding