


Technyl® A 246M

PA66

Solvay Engineering Plastics

Product Texts

Unreinforced and modified polyamide 6.6, with improved impact resistance

Mechanical properties

dry / cond

Unit

Test Standard

ISO Data

Tensile Modulus	1900 / 600	MPa	ISO 527-1/-2
Charpy impact strength (+23°C)	N / -	kJ/m ²	ISO 179/1eU
Charpy notched impact strength (+23°C)	55 / -	kJ/m ²	ISO 179/1eA

Thermal properties

dry / cond

Unit

Test Standard

ISO Data

Melting temperature (10°C/min)	263 / *	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	65 / *	°C	ISO 75-1/-2
Coeff. of linear therm. expansion, parallel	70 / *	E-6/K	ISO 11359-1/-2
Oxygen index	24.5 / *	%	ISO 4589-1/-2

Electrical properties

dry / cond

Unit

Test Standard

ISO Data

Relative permittivity, 1MHz	3.2 / 4	-	IEC 60250
Dissipation factor, 1MHz	200 / -	E-4	IEC 60250
Volume resistivity	>1E13 / 1E13	Ohm*m	IEC 60093
Surface resistivity	* / 1E13	Ohm	IEC 60093
Electric strength	30 / 38	kV/mm	IEC 60243-1
Comparative tracking index	600 / -	-	IEC 60112

Other properties

dry / cond

Unit

Test Standard

ISO Data

Density	1080 / -	kg/m ³	ISO 1183
---------	----------	-------------------	----------

Test specimen production

Value

Unit


Test Standard

ISO Data


Injection Molding, melt temperature	245	°C	ISO 294
Injection Molding, mold temperature	80	°C	ISO 10724

Diagrams


Viscosity-shear rate

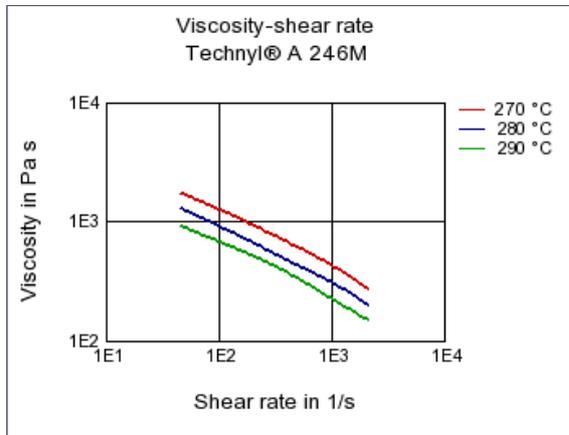

Shearstress-shear rate

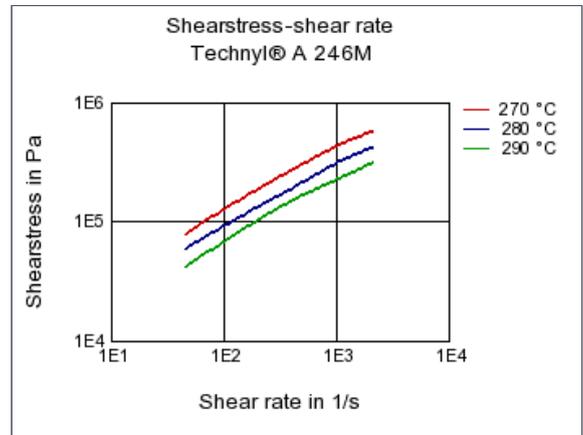

Stress-strain

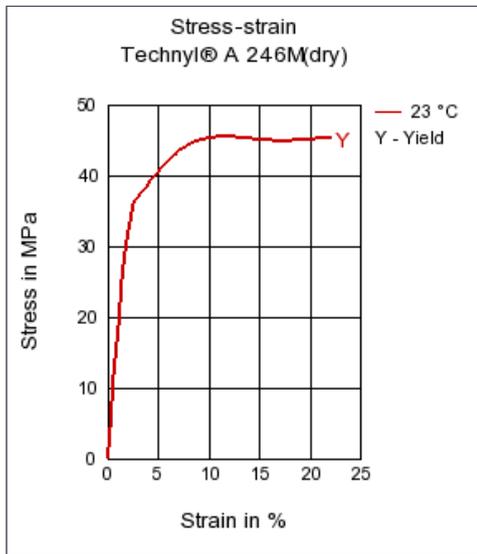

Characteristics

Processing

Injection Molding

Special Characteristics

Heat stabilized or stable to heat

Other text information

Injection Molding

PROCESSING

Melt temperature: 250°C

Mold temperature: 80°C

Chemical Media Resistance

Acids

- Acetic Acid (5% by mass) (23°C)
- Citric Acid solution (10% by mass) (23°C)
- Lactic Acid (10% by mass) (23°C)
- Hydrochloric Acid (36% by mass) (23°C)
- Nitric Acid (40% by mass) (23°C)
- Sulfuric Acid (38% by mass) (23°C)
- Sulfuric Acid (5% by mass) (23°C)
- Chromic Acid solution (40% by mass) (23°C)

Bases

-  Sodium Hydroxide solution (35% by mass) (23°C)
-  Sodium Hydroxide solution (1% by mass) (23°C)
-  Ammonium Hydroxide solution (10% by mass) (23°C)

Alcohols

-  Isopropyl alcohol (23°C)
-  Methanol (23°C)
-  Ethanol (23°C)

Hydrocarbons

-  n-Hexane (23°C)
-  Toluene (23°C)
-  iso-Octane (23°C)

Ketones

-  Acetone (23°C)

Ethers

-  Diethyl ether (23°C)

Mineral oils

-  SAE 10W40 multigrade motor oil (23°C)

Standard Fuels

-  Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)
-  Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)

Salt solutions

-  Zinc Chloride solution (50% by mass) (23°C)

Other

-  Ethylene Glycol (50% by mass) in water (108°C)
-  50% Oleic acid + 50% Olive Oil (23°C)
-  Water (23°C)
-  Deionized water (90°C)