


Technyl® A 30H1 V30

PA66-GF30 FR

Solvay Engineering Plastics


Product Texts

Polyamide 6.6 30 % glass fibre reinforced, heat stabilised,
 phosphorus free UL 94 V0 rated at 0.8 mm wall thickness good thermal stability


Mechanical properties	dry / cond	Unit	Test Standard
ISO Data			
Tensile Modulus	9400 / 7500	MPa	ISO 527-1/-2
Stress at break	100 / -	MPa	ISO 527-1/-2
Strain at break	2.2 / -	%	ISO 527-1/-2
Charpy impact strength (+23°C)	38 / -	kJ/m ²	ISO 179/1eU
Charpy notched impact strength (+23°C)	9.5 / -	kJ/m ²	ISO 179/1eA
Thermal properties			
ISO Data			
Melting temperature (10°C/min)	263 / *	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	226 / *	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	255 / *	°C	ISO 75-1/-2
Burning behav. at thickness h	V-0 / *	class	IEC 60695-11-10
Thickness tested	0.8 / *	mm	IEC 60695-11-10
Electrical properties			
ISO Data			
Relative permittivity, 1MHz	3.3 / 3.6	-	IEC 60250
Dissipation factor, 1MHz	130 / -	E-4	IEC 60250
Volume resistivity	1E13 / 1E10	Ohm*m	IEC 60093
Surface resistivity	* / 1E12	Ohm	IEC 60093
Electric strength	42 / 40	kV/mm	IEC 60243-1
Comparative tracking index	600 / -	-	IEC 60112
Other properties			
ISO Data			
Density	1560 / -	kg/m ³	ISO 1183

Diagrams


Viscosity-shear rate

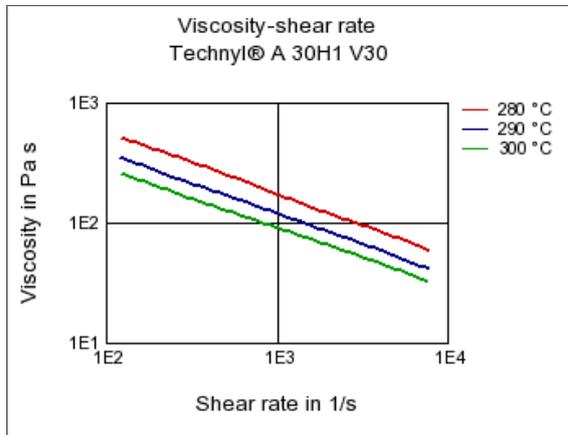

Shearstress-shear rate

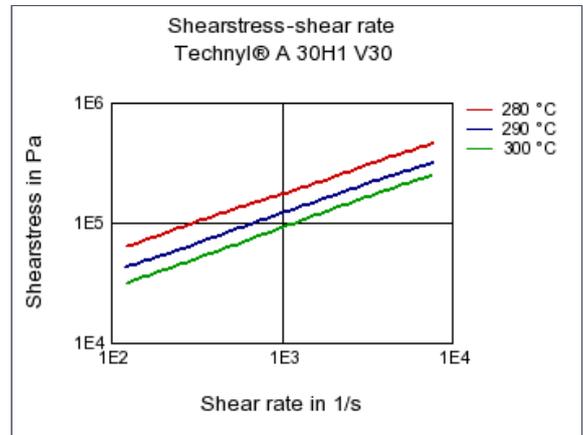

Stress-strain

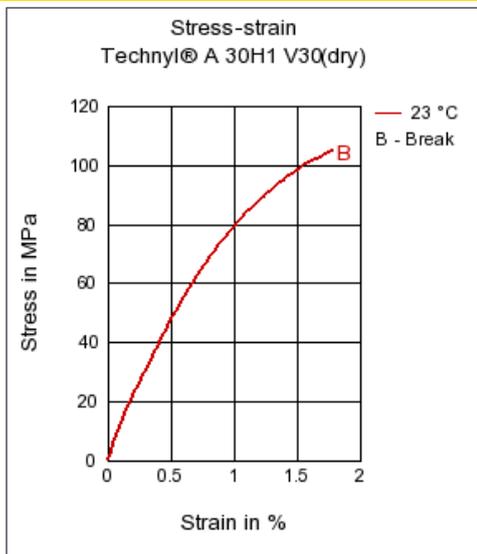

Characteristics

Processing

Injection Molding

Special Characteristics

Flame retardant, Heat stabilized or stable to heat

Other text information

Injection Molding

PROCESSING

Melt temperature: 275°C

Mold temperature: 60°C

Chemical Media Resistance

Acids

- ☺ Acetic Acid (5% by mass) (23°C)
- ☺ Citric Acid solution (10% by mass) (23°C)
- ☺ Lactic Acid (10% by mass) (23°C)
- ⊘ Hydrochloric Acid (36% by mass) (23°C)
- ⊘ Nitric Acid (40% by mass) (23°C)
- ⊘ Sulfuric Acid (38% by mass) (23°C)
- ⊘ Sulfuric Acid (5% by mass) (23°C)
- ⊘ Chromic Acid solution (40% by mass) (23°C)

Bases

-  Sodium Hydroxide solution (35% by mass) (23°C)
-  Sodium Hydroxide solution (1% by mass) (23°C)
-  Ammonium Hydroxide solution (10% by mass) (23°C)

Alcohols

-  Isopropyl alcohol (23°C)
-  Methanol (23°C)
-  Ethanol (23°C)

Hydrocarbons

-  n-Hexane (23°C)
-  Toluene (23°C)
-  iso-Octane (23°C)

Ketones

-  Acetone (23°C)

Ethers

-  Diethyl ether (23°C)

Mineral oils

-  SAE 10W40 multigrade motor oil (23°C)

Standard Fuels

-  Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)
-  Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)

Salt solutions

-  Zinc Chloride solution (50% by mass) (23°C)

Other

-  Ethylene Glycol (50% by mass) in water (108°C)
-  50% Oleic acid + 50% Olive Oil (23°C)
-  Water (23°C)
-  Deionized water (90°C)